




gesis®

Pluggable electrical installation
for indoors

Catalog 2017

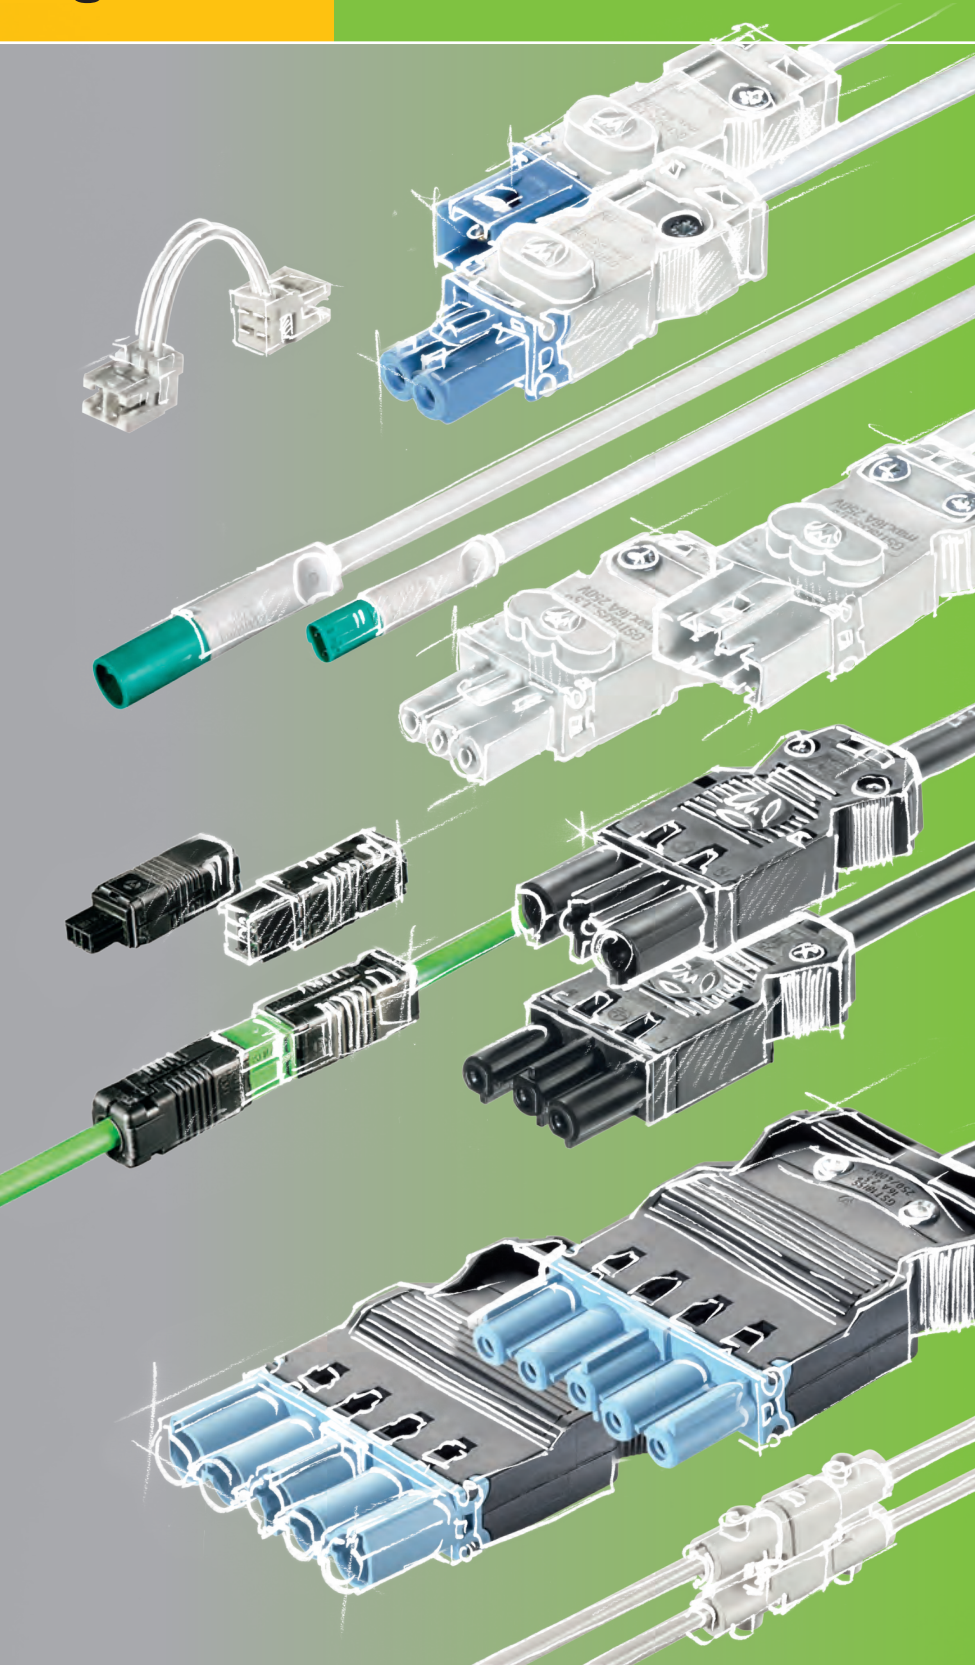



Content

	From Page
gesis® CLASSIC	
Introduction – GST18® codings	4
GST18i3 Plug connectors, device connectors, distributors and intermediate couplings, cable assemblies, 3-pole	6
GST18i4 Plug connectors, device connectors, distributors and intermediate couplings, cable assemblies, 4-pole	32
GST18i5 Plug connectors, device connectors, distributors, cable assemblies, 5-pole	42
GST18i6 Plug connectors, device connectors, distributors, cable assemblies, 6-pole	56
GST18 Mounting materials, accessories, distributor boxes	60
gesis®TOP and gesis®LINECT	68
No Flame Plug connectors and device connectors	70
Test plugs	72
gesis® MINI	
Introduction – GST15 codings	74
GST15i2 Plug connectors, device connectors, distributors and intermediate couplings, cable assemblies, 2-pole	76
GST15i3 Plug connectors, device connectors, distributors and intermediate couplings, cable assemblies, 3-pole	84
GST15i4 Plug connectors, device connectors, cable assemblies, 4-pole	92
GST15i5 Plug connectors, device connectors, distributors and intermediate couplings, cable assemblies, 5-pole	98
GST15 Mounting materials, sample kits	106
gesis® MICRO	
Introduction – GST08 codings	108
GST08i2 Device connectors, distributors, cable assemblies, 2-pole	110
GST08i3 Distributors, cable assemblies, 3-pole	116
gesis® NV	120
BST14i2 Plug connectors, device connectors, distributors, cable assemblies, 2-pole	122
BST14i3 Plug connectors, device connectors, distributors, cable assemblies, 3-pole	130
BST Cover pieces	135
LST03 PC board connectors, cable assemblies, 2 and 4-pole	136
gesis® NRG	138
Flat cable, 5-pole, 2.5 and 4 mm ² , taps and feeds	140
Flat cable, 5+2-pole, 5 x 2.5/4 mm ² , 2 x 1.5 mm ² , taps and feeds	141
Accessories for flat cable 5-pole and 5+2-pole	143
Flat cable, 5-pole, 10 mm ² ; feeds and adapters	144
Flat cable, 5-pole, 16 mm ² ; feeds and adapters	145
Accessories for flat cable 5-pole 10 and 16 mm ²	146
Country-specific products	148
Great Britain	150
Spain	180
facts & DATA	188
Installation instructions	193
Technical data	212
Index	232



Building installation – simply plug in – perfect!

gesis® – one name, one idea, an inimitable story of success.

Over 35 years ago, the foundations were laid for a revolution in electrical installation with the predecessor of our current **GST18®** installation plug connector system. Time-consuming screw-type clamping units were replaced with robust, machined solid metal contacts that made it possible to connect and disconnect electrical consumers to and from the electrical installation quickly, easily, and safely.

Since then, Wieland Electric GmbH has set many standards in building installation:

- Active creation of a product norm that defines safety standards
- Expansion of the system to include plug connectors, device connectors, distribution blocks, and industrially fabricated and tested connection cables
- Establishment of a color and mechanical coding system so that different applications can be distinguished between safely
- Special customized solutions that allow even exceptional applications to be realized


There are now more than 5 billion **gesis®** contacts in use worldwide in a vast range of applications, and the **gesis®** system consists of several product groups. The basic idea of saving 70% time and 30% costs is proving persuasive.

The **GST18®** system now comprises in excess of 3,000 standard articles, which together facilitate the basic idea of quick, easy, and safe installation for any application of modern building automation.





More information

<http://eshop.wieland-electric.com>


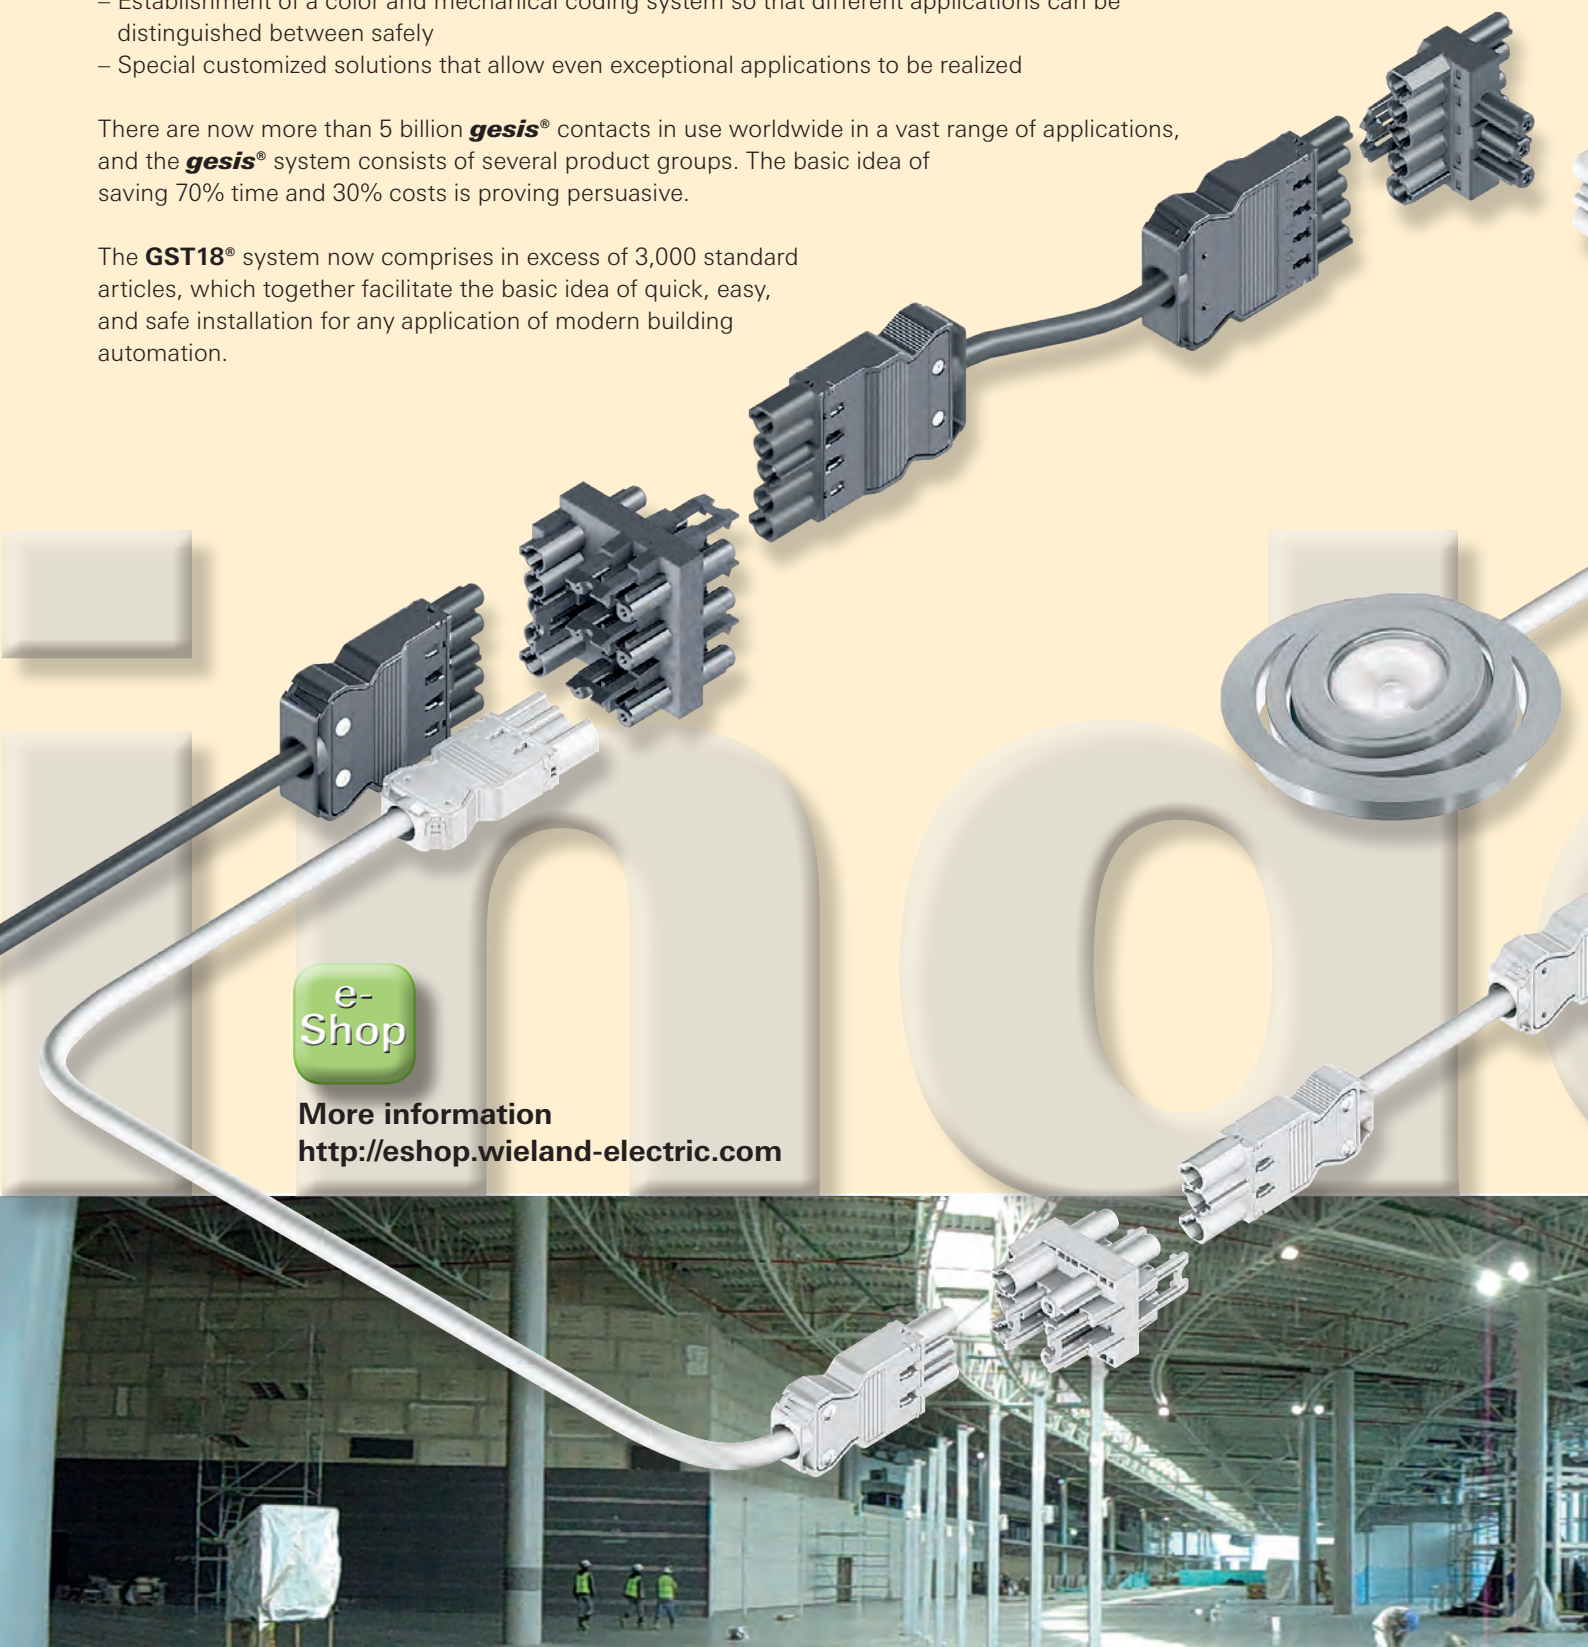


Coding of GST18® connectors



GST18i3

Code 1 N, PE, L white black	Code 2 N, PE, L pebble gray tomato red	Code 3 N, PE, L salmon pink	Code 4 3/L, 2/N, 1 brown	Code 5 3, 2, 1 pastel blue	Code 6 3, 2, 1 turquoise blue	Code 7 2/N, PE, 1 may green
						
Application Mains voltage	Application Mains voltage (UPS)	Application Mains voltage	Application Switching application	Application not SELV (e.g. DALI)	Application acc. to customer requirements (without PE)	Application acc. to customer requirements (with PE)

GST18i4

Code 1 2, N, PE, 1 white black	Code 2 2, N, PE, 1 pebble gray tomato red	Code 3 4, 3, 2/N, 1 turquoise blue	Code 4 3, 2/N, PE, 1 may green
			
Application Mains voltage	Application Mains voltage (UPS)	Application acc. to customer requirements (without PE)	Application acc. to customer requirements (with PE)

GST18i5

Code 1 3, N, PE, 2, 1 white black	Code 2 L, N, PE, D2, D1 pastel blue	Code 3 3, N, PE, 2, 1 pebble gray tomato red	Code 4 4, 3/N, PE, 2, 1 may green	Code 5 5, 4/N, 3, 2, 1 turquoise blue	Code 6 5, 4, 3, 2, 1 light blue
					
Application Mains voltage	Application not SELV (e.g. DALI)	Application Mains voltage (UPS)	Application acc. to customer requirements (with PE)	Application acc. to customer requirements (without PE)	Application Low voltage/SELV (50 V)

Connector, 3-pole


Screw connection

Rated voltage:	250V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1
Lockable:	Yes

Cross section fine-stranded:	0,75 - 2,5mm ²
Cross section solid:	0,75 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
for insulation and sheath strip lengths please see technical data	

female

male

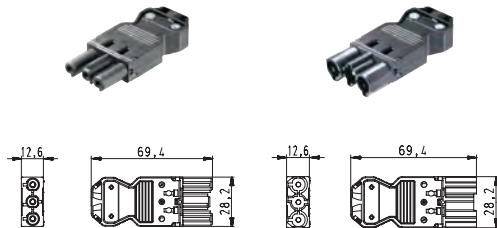

For cables Ø 6.5 - 10.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	92.931.3053.1	92.932.3053.1
□ white	Mains 250 V	L, N, PE	92.931.3053.0	92.932.3053.0
■ pebble gray	UPS 250 V	L, N, PE	92.931.3453.0	92.932.3453.0
■ tomato red	UPS 250 V	L, N, PE	92.931.3453.5	92.932.3453.5
■ salmon pink	Mains 250 V	L, N, PE	92.931.3653.0	92.932.3653.0
■ brown	Switch function 250 V	1, 2, 3	92.931.3853.0	92.932.3853.0
■ pastel blue	not SELV	1, 2, 3	92.931.3753.0	92.932.3753.0
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N	92.931.3553.0	92.932.3553.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3	92.931.4053.0	92.932.4053.0


Screw connection

Rated voltage:	250V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1
Lockable:	Yes

Cross section fine-stranded:	0,75 - 4mm ²
Cross section solid:	0,75 - 4mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
for insulation and sheath strip lengths please see technical data	

female

male

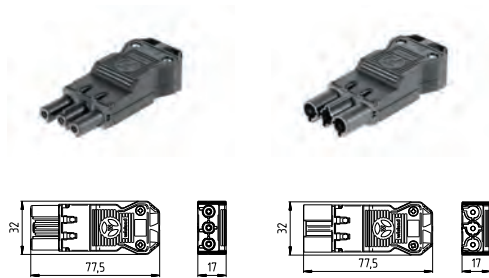


For cables Ø 10.5 - 14.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	92.931.5053.1	92.932.5053.1
□ white	Mains 250 V	L, N, PE	92.931.5053.0	92.932.5053.0
■ pebble gray	UPS 250 V	L, N, PE	92.931.5353.0	92.932.5353.0
■ tomato red	UPS 250 V	L, N, PE	92.931.5353.5	92.932.5353.5
■ brown	Switch function 250 V	1, 2, 3	92.931.5853.0	92.932.5853.0
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N	92.931.5553.0	92.932.5553.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3	92.931.6053.0	92.932.6053.0


Connector, 3-pole

Spring force			
Rated voltage:	250V	Cross section fine-stranded:	0,75 - 1,5mm ²
Rated current:	20 A	Cross section solid:	0,75 - 2,5mm ²
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2	Housing material:	Polyamide
Terminations per pole:	2	for insulation and sheath strip lengths please see technical data	
Lockable:	Yes		

female



male



For cables Ø 7.8 - 10.3 mm			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	92.933.0053.1	92.934.0053.1
□ white	Mains 250 V	L, N, PE	92.933.0053.0	92.934.0053.0
■ pebble gray	UPS 250 V	L, N, PE	92.933.0153.0	92.934.0153.0
■ tomato red	UPS 250 V	L, N, PE	92.933.0153.5	92.934.0153.5
■ salmon pink	Mains 250 V	L, N, PE	92.933.0553.0	92.934.0553.0
■ brown	Switch function 250 V	1, 2, 3	92.933.0453.0	92.934.0453.0
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N	92.933.0753.0	92.934.0753.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3	92.933.0653.0	92.934.0653.0


Device connectors, 3-pole

Snap-in, Screw connection


Rated voltage:	250V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1

Lockable:	Yes
Cross section fine-stranded:	0,75 - 4mm ²
Cross section solid:	0,75 - 4mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female



male



Housing material thickness 0.5-1.5 mm


Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	92.031.8758.1	92.032.8758.1
□ white	Mains 250 V	L, N, PE	92.031.8758.0	92.032.8758.0

Built-in component, Screw connection

Rated voltage:	250V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	2

Lockable:	Yes
Cross section fine-stranded:	0,75 - 4mm ²
Cross section solid:	0,75 - 4mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female



Double screw connection

Color of coding	Application	Marking of poles	female Part No.
■ black	Mains 250 V	L, N, PE	92.031.4453.1
□ white	Mains 250 V	L, N, PE	92.031.4453.0
■ pebble	UPS 250 V	L, N, PE	92.031.4853.0
gray			
■ salmon	Mains 250 V	L, N, PE	92.031.4953.0
pink			

Device connectors, 3-pole



Built-in component, Screw connection

Rated voltage:	250V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1

Lockable:	Yes
Cross section fine-stranded:	0,75 - 4mm ²
Cross section solid:	0,75 - 4mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male



Single screw connection

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	92.031.3258.1	92.032.3358.1
□ white	Mains 250 V	L, N, PE	92.031.3258.0	92.032.3358.0
■ pebble gray	UPS 250 V	L, N, PE	92.031.3458.0	92.032.3458.0
■ tomato red	UPS 250 V	L, N, PE	92.031.3458.5	92.032.3458.5
■ salmon pink	Mains 250 V	L, N, PE	92.031.3658.0	92.032.3658.0
■ brown	Switch function 250 V	1, 2, 3	92.031.3858.0	92.032.3858.0
■ pastel blue	not SELV	1, 2, 3	92.031.3758.0	92.032.3758.0
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N	92.031.3558.0	92.032.3558.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3	92.031.3958.0	92.032.3958.0



Snap-in, Spring force

Rated voltage:	250V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	2

Lockable:	Yes
Cross section fine-stranded:	0,5 - 1,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male





Housing material thickness 0.5-1.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	92.031.9658.1	92.032.9658.1
□ white	Mains 250 V	L, N, PE	92.031.9658.0	92.032.9658.0
■ pebble gray	UPS 250 V	L, N, PE	92.031.9758.0	92.032.9758.0
■ tomato red	UPS 250 V	L, N, PE	92.031.9758.5	92.032.9758.5
■ salmon pink	Mains 250 V	L, N, PE	92.031.8558.0	92.032.8558.0
■ brown	Switch function 250 V	1, 2, 3	92.031.8458.0	92.032.8458.0
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N	92.031.8058.0	92.032.8058.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3	92.031.8258.0	92.032.8258.0

female

male



Housing material thickness 1.5-2.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	92.031.7658.1	92.032.7658.1
□ white	Mains 250 V	L, N, PE	92.031.7658.0	92.032.7658.0

Device connectors, 3-pole


Solder connector, Soldering connection

Rated voltage:	250V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2

Terminations per pole:	1
Lockable:	Yes
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

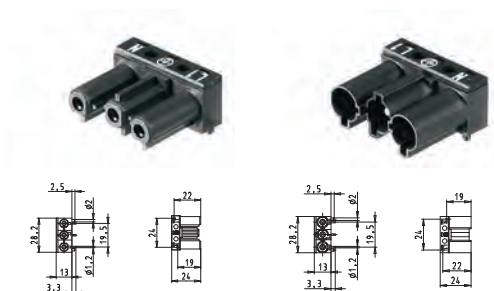

horizontal, without fastening flange


female

male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	92.033.0058.1	92.034.0058.1
□ white	Mains 250 V	L, N, PE	92.033.0058.0	92.034.0058.0
■ pebble	UPS 250 V	L, N, PE	92.033.0158.0	92.034.0158.0
gray				
■ tomato red	UPS 250 V	L, N, PE	92.033.0158.5	92.034.0158.5
■ salmon	Mains 250 V	L, N, PE	92.033.0758.0	
pink				
■ brown	Switch function 250 V	1, 2, 3	92.033.0658.0	92.034.0658.0
■ pastel blue	not SELV	1, 2, 3	92.033.0458.0	92.034.0458.0

female

male

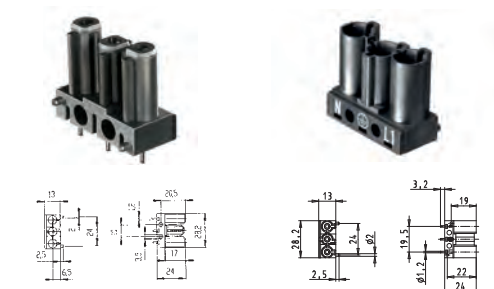

vertical, without fastening flange

female


male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	92.031.0058.1	92.032.0058.1
□ white	Mains 250 V	L, N, PE	92.031.0058.0	92.032.0058.0
■ pebble	UPS 250 V	L, N, PE	92.031.0158.0	92.032.0158.0
gray				
■ tomato red	UPS 250 V	L, N, PE	92.031.0158.5	92.032.0158.5
■ salmon	Mains 250 V	L, N, PE	92.031.0758.0	
pink				
■ brown	Switch function 250 V	1, 2, 3	92.031.0658.0	92.032.0658.0
■ pastel blue	not SELV	1, 2, 3	92.031.0458.0	92.032.0458.0

Distributors

Rated voltage:	250 V or 250 / 400 V	Degree of protection (IP):	IP20, inserted IP40
Rated current:	20 A	Lockable:	Yes
Rated impulse voltage:	4 kV		


h distributor

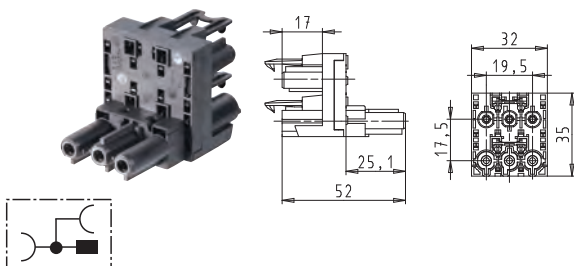

3-pole with interlock integrated on one side

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	2	92.030.6053.0
■ black	Mains 250 V	2	92.030.6053.1


H distributor

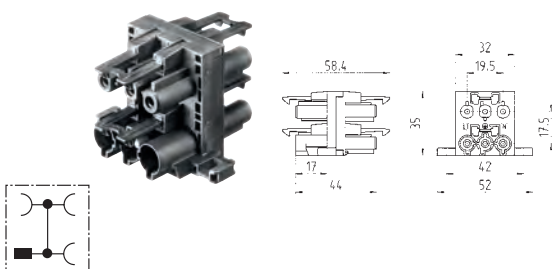

3-pole with mounting

Color	Application	Outputs	Part No.
□ white	Mains 250 V	3	92.030.4853.0
■ black	Mains 250 V	3	92.030.4853.1

H distributor

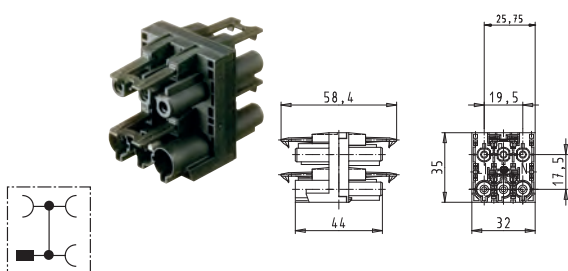

3-pole without mounting option

Color	Application	Outputs	Part No.
□ white	Mains 250 V	3	92.030.4953.0
■ black	Mains 250 V	3	92.030.4953.1

H distributor

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	3	92.030.6953.0
■ black	Mains 250 V	3	92.030.6953.1
■ pebble gray	UPS 250 V	3	92.030.7053.0
■ tomato red	UPS 250 V	3	92.030.7053.5
■ salmon	Mains 250 V	3	92.030.7553.0
pink			
■ turquoise	Acc. to customer requirements (without PE)	3	92.030.7153.0
■ may green	Acc. to customer requirements (with PE)	3	92.030.7253.0


Expected to be available from Q4 2017

Distributors

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV

Degree of protection (IP): IP20, inserted IP40
 Lockable: Yes


HH distributor

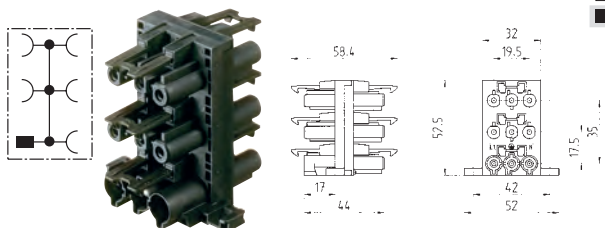

3-pole with mounting

Color	Application	Outputs	Part No.
□ white	Mains 250 V	5	92.030.5353.0
■ black	Mains 250 V	5	92.030.5353.1


HH distributor

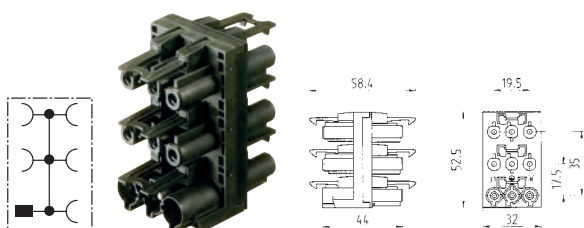

3-pole without mounting option

Color	Application	Outputs	Part No.
□ white	Mains 250 V	5	92.030.5253.0
■ black	Mains 250 V	5	92.030.5253.1

HH distributor




3-pole with option of mounting to 07.413.6853.1

Color	Application	Outputs	Part No.
□ white	Mains 250 V	5	92.030.0953.0
■ black	Mains 250 V	5	92.030.0953.1

Expected to be available from Q4 2017

HH switching distributor*

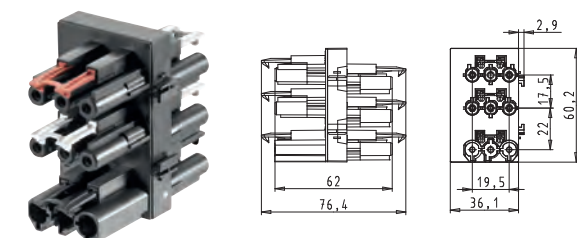

3-pole with mounting option

Color	Application	Switching options	Part No.
■ black	Mains 250 V	On/Off	92.030.0053.1
■ black	Mains 250 V	Motion detector	92.030.0153.1
■ black	Mains 250 V	Two-way circuit	92.030.0253.1
■ black	Mains 250 V	Series circuit	92.030.0353.1


*For connection diagrams see Technical Data

T distributor

Rated voltage:	250 V
Rated current:	20 A
Rated impulse voltage:	4 kV

Degree of protection (IP):	IP20, inserted IP40
Lockable:	Yes
Interlock for vertical output has to be ordered separately	


T distributor

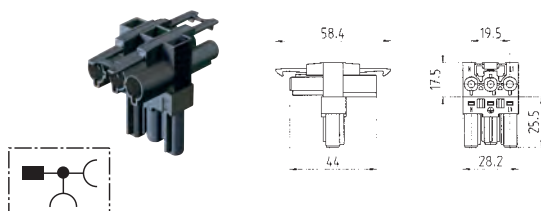

3-pole with interlock on both sides on feed-through level

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	2	92.030.1053.0
■ black	Mains 250 V	2	92.030.1053.1


T distributor

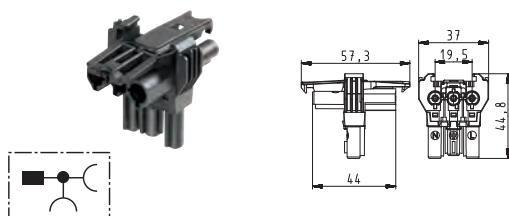

3-pole with option of mounting to 07.413.6853.1, cascadable

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	2	92.030.3153.0
■ black	Mains 250 V	2	92.030.3153.1
■ pebble gray	UPS 250 V	2	92.030.3653.0
■ tomato red	UPS 250 V	2	92.030.3653.5


T distributor

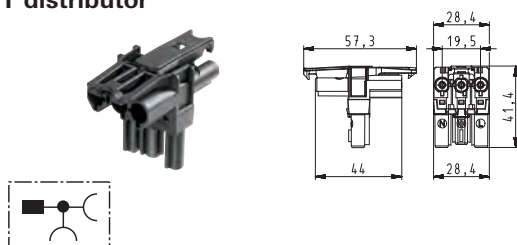

3-pole without mounting option, cascadable


Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	2	92.030.3053.0
■ black	Mains 250 V	2	92.030.3053.1
■ pebble gray	UPS 250 V	2	92.030.3553.0
■ tomato red	UPS 250 V	2	92.030.3553.5

T distributor, flat

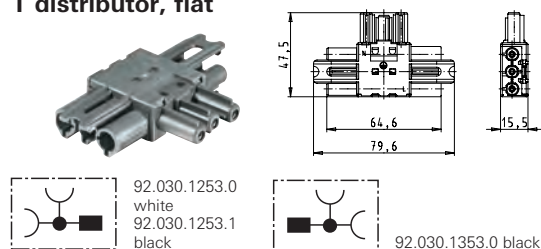

3-pole with interlock on both sides on feed-through level

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	2	92.030.1253.0
■ black	Mains 250 V	2	92.030.1253.1
■ black	Mains 250 V	2	92.030.1353.0




Intermediate couplings

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV

Degree of protection (IP): IP20, inserted IP40
 Lockable: See Accessories


3-pole lockable, without mounting option

Color	Inputs	Outputs	Part No.
□ white	1, male	1, female	92.030.5853.0

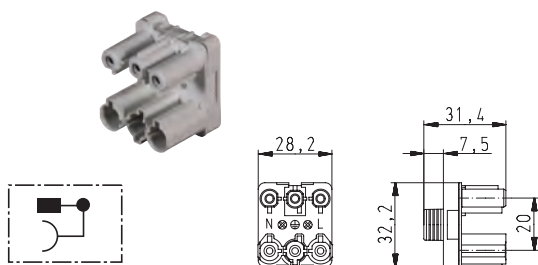


3-pole with no locking option

Color	Inputs	Outputs	Part No.
□ white	1, male	1, female	92.030.5958.0
■ black	1, male	1, female	92.030.5958.1

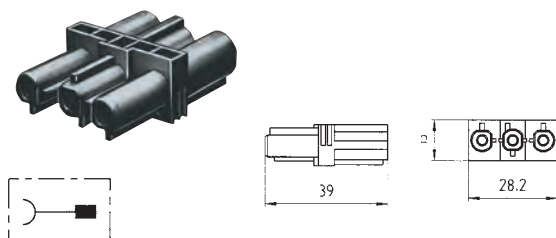

3-pole with locking option


Color	Inputs	Outputs	Part No.
■ black	1, male	1, female	99.452.9910.0

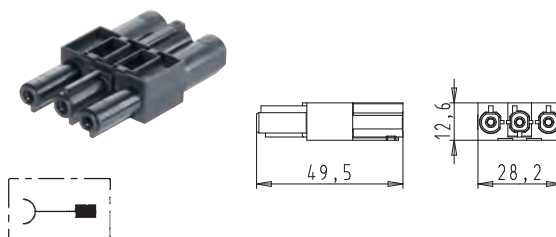

IDC adapter

3-pole for easy integration in existing installations


Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	1	92.731.6053.0

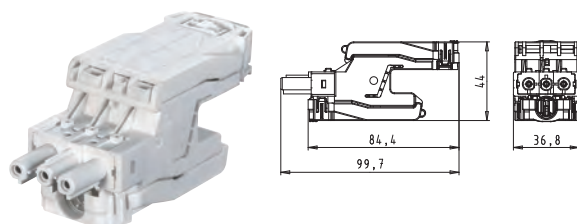

Cable assemblies, 3-pole

0.75 mm ² , 6 A			
Rated voltage:	250V	Lockable:	Yes
Rated current:	6 A	Preparation of conductor ends:	Ultrasonically compressed wire ends
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

gesis® CLASSIC

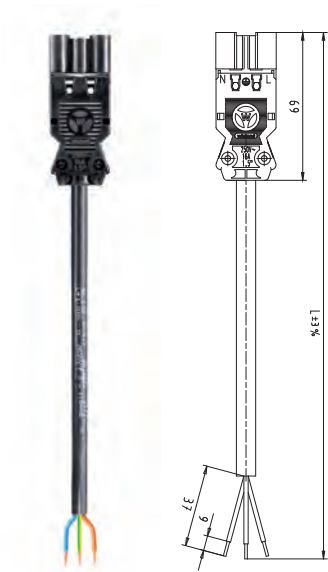

Connection cable, male - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color:		■ black	■ black
Color of coding:		■ black	■ black
Marking of poles:		L, N, PE	L, N, PE
Application:		Mains 250 V	Mains 250 V
Length (m)			
1	92.230.1004.1	92.230.1064.1	
2	92.230.2004.1	92.230.2064.1	
3	92.230.3004.1	92.230.3064.1	
4	92.230.4004.1		
5	92.230.5004.1		
6	92.230.6004.1		
7	92.230.7004.1		
8	92.230.8004.1		
Cable color:		□ white	□ white
Color of coding:		□ white	□ white
Marking of poles:		L, N, PE	L, N, PE
Application:		Mains 250 V	Mains 250 V
Length (m)			
1	92.230.1004.2	92.230.1064.2	
2	92.230.2004.2	92.230.2064.2	
3	92.230.3004.2	92.230.3064.2	
4	92.230.4004.2		
5	92.230.5004.2		
6	92.230.6004.2		
7	92.230.7004.2		
8	92.230.8004.2		

GST® CLASSIC

Cable assemblies, 3-pole

1 mm², 10 A

Rated voltage:	250V	Lockable:	Yes
Rated current:	10 A	Preparation of conductor ends:	Ultrasonically compressed wire ends
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

Connection cable, male - free end


H05VV-F
halogenated
Part No.

H05Z1Z1-F
halogen free
Part No.

Length (m)


Cable color:	■ black	1	92.231.1004.1	■ black	92.231.1064.1
Color of coding:	■ black	2	92.231.2004.1		
Marking of poles:	L, N, PE	3	92.231.3004.1		92.231.3064.1
Application:	Mains 250 V	4	92.231.4004.1		
		5	92.231.5004.1		
		6	92.231.6004.1		
		7	92.231.7004.1		
		8	92.231.8004.1		

Cable color:		1		□ white	
Color of coding:	□ white	3		92.231.1064.2	
Marking of poles:	L, N, PE			92.231.3064.2	
Application:	Mains 250 V				

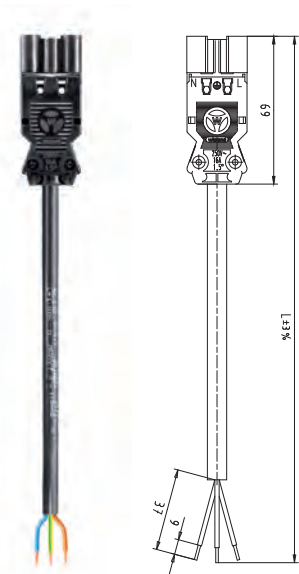

Cable assemblies, 3-pole

1 mm², 10 A			
Rated voltage:	250V	Pollution degree:	2
Rated current:	10 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV

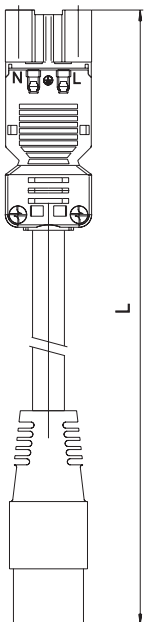

Mains connection cable, low-heat device, female - male

		Length (m)	H05VV-F halogenated Part No.
Cable color:	☐ white	2	☐ white
Color of coding:			99.400.5623.1
Marking of poles:	L, N, PE		
Application:	Mains 250 V		

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

Connecting cable, female - male

		H05VV-F halogenated	H05V2V2-F halogenated	H07RN-F halogenated
	Length (m)	Part No.	Part No.	Part No.

Cable color:	■ black	■ black	■ black	■ black
Color of coding:	■ black	92.232.1000.1	92.232.1010.1	G3.032.0102.1
Marking of poles:	L, N, PE	2 92.232.2000.1	92.232.2010.1	G3.032.0202.1
Application:	Mains 250 V	3 92.232.3000.1	92.232.3010.1	G3.032.0302.1
		4 92.232.4000.1	92.232.4010.1	G3.032.0402.1
		5 92.232.5000.1	92.232.5010.1	G3.032.0502.1
		6 92.232.6000.1	92.232.6010.1	G3.032.0602.1
		7 92.232.7000.1	92.232.7010.1	G3.032.0702.1
		8 92.232.8000.1	92.232.8010.1	G3.032.0802.1

Cable color:	□ white	□ white	□ white	■ black
Color of coding:	□ white	1 92.232.1000.2	92.232.1010.2	G3.032.0102.2
Marking of poles:	L, N, PE	2 92.232.2000.2	92.232.2010.2	G3.032.0202.2
Application:	Mains 250 V	3 92.232.3000.2	92.232.3010.2	G3.032.0302.2
		4 92.232.4000.2	92.232.4010.2	
		5 92.232.5000.2	92.232.5010.2	G3.032.0502.2
		6 92.232.6000.2	92.232.6010.2	
		7 92.232.7000.2	92.232.7010.2	
		8 92.232.8000.2	92.232.8010.2	

Cable color:	■ black	■ black	■ black	
Color of coding:	■ black	1 92.232.1000.3	92.232.1010.3	
Marking of poles:	L, N, PE	2 92.232.2000.3	92.232.2010.3	
Application:	UPS 250 V	3 92.232.3000.3	92.232.3010.3	
		4 92.232.4000.3	92.232.4010.3	
		5 92.232.5000.3	92.232.5010.3	
		6 92.232.6000.3	92.232.6010.3	
		7 92.232.7000.3	92.232.7010.3	
		8 92.232.8000.3	92.232.8010.3	

Cable color:	■ black	■ black		
Color of coding:	■ black	1 92.297.1000.0		
Marking of poles:	L, N, PE	2 92.297.2000.0		
Application:	UPS 250 V	3 92.297.3000.0		
		4 92.297.4000.0		
		5 92.297.5000.0		
		6 92.297.6000.0		
		7 92.297.7000.0		
		8 92.297.8000.0		

Cable color:	■ black	■ black		
Color of coding:	■ black	1 92.232.1000.5	92.232.1010.5	
Marking of poles:	L, N, PE	2 92.232.2000.5	92.232.2010.5	
Application:	Mains 250 V	3 92.232.3000.5	92.232.3010.5	
		4 92.232.4000.5	92.232.4010.5	
		5 92.232.5000.5	92.232.5010.5	
		6 92.232.6000.5	92.232.6010.5	
		7 92.232.7000.5	92.232.7010.5	
		8 92.232.8000.5	92.232.8010.5	

Cable color:	■ black	■ black		
Color of coding:	■ black	1 92.232.1000.4		
Marking of poles:	1, 2, 3	2 92.232.2000.4		
Application:	Switch function	3 92.232.3000.4		
	250 V	4 92.232.4000.4		
		5 92.232.5000.4		
		6 92.232.6000.4		
		7 92.232.7000.4		
		8 92.232.8000.4		

Cable color:	■ black	■ black		
Color of coding:	■ black	1 92.297.1000.7		
Marking of poles:	1, PE, 2/N	2 92.297.2000.7		
Application:	Acc. to customer	3 92.297.3000.7		
	requirements (with	4 92.297.4000.7		
	PE)	5 92.297.5000.7		
		6 92.297.6000.7		
		7 92.297.7000.7		
		8 92.297.8000.7		

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

Connecting cable, female - male

H05Z1Z1-F

Halogen free

RZ1 0.6/1kV

halogen free

Length (m)

Part No.

Part No.

Cable color: ■ black
 Color of coding: ■ black
 Marking of poles: L, N, PE
 Application: Mains 250 V

1	92.232.1060.1	G2.232.1060.1
2	92.232.2060.1	G2.232.2060.1
3	92.232.3060.1	G2.232.3060.1
4	92.232.4060.1	G2.232.4060.1
5	92.232.5060.1	G2.232.5060.1
6	92.232.6060.1	G2.232.6060.1
7	92.232.7060.1	G2.232.7060.1
8	92.232.8060.1	G2.232.8060.1

Cable color: □ white
 Color of coding: □ white
 Marking of poles: L, N, PE
 Application: Mains 250 V

1	92.232.1060.2	G2.232.1060.2
2	92.232.2060.2	G2.232.2060.2
3	92.232.3060.2	G2.232.3060.2
4	92.232.4060.2	G2.232.4060.2
5	92.232.5060.2	G2.232.5060.2
6	92.232.6060.2	G2.232.6060.2
7	92.232.7060.2	G2.232.7060.2
8	92.232.8060.2	G2.232.8060.2

Cable color: ■ pebble gray
 Color of coding: ■ pebble gray
 Marking of poles: L, N, PE
 Application: UPS 250 V

1	92.232.1060.3	
2	92.232.2060.3	
3	92.232.3060.3	
4	92.232.4060.3	
5	92.232.5060.3	
6	92.232.6060.3	
7	92.232.7060.3	
8	92.232.8060.3	

Cable color: ■ black
 Color of coding: ■ tomato red
 Marking of poles: L, N, PE
 Application: UPS 250 V

1	92.297.1060.0	
2	92.297.2060.0	
3	92.297.3060.0	
4	92.297.4060.0	
5	92.297.5060.0	
6	92.297.6060.0	
7	92.297.7060.0	
8	92.297.8060.0	

Cable color: ■ black
 Color of coding: ■ salmon pink
 Marking of poles: L, N, PE
 Application: Mains 250 V

1	92.232.1060.5	
2	92.232.2060.5	
3	92.232.3060.5	
4	92.232.4060.5	
5	92.232.5060.5	
6	92.232.6060.5	
7	92.232.7060.5	
8	92.232.8060.5	

Cable color: ■ black
 Color of coding: ■ brown
 Marking of poles: 1, 2, 3
 Application: Switch function
 250 V

1	92.232.1060.4	
2	92.232.2060.4	
3	92.232.3060.4	
4	92.232.4060.4	
5	92.232.5060.4	
6	92.232.6060.4	
7	92.232.7060.4	
8	92.232.8060.4	

Cable color: ■ black
 Color of coding: ■ may green
 Marking of poles: 1, PE, 2/N
 Application: Acc. to customer
 requirements (with
 PE)

1	92.297.1060.7	
2	92.297.2060.7	
3	92.297.3060.7	
4	92.297.4060.7	
5	92.297.5060.7	
6	92.297.6060.7	
7	92.297.7060.7	
8	92.297.8060.7	

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

Connection cable, female - free end

	H05VV-F halogenated	H05V2V2-F halogenated	H07RN-F halogenated
Length (m)	Part No.	Part No.	Part No.

Cable color:	■ black	■ black	■ black
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	Mains 250 V		
	1	92.232.1003.1	92.232.1013.1
	2	92.232.2003.1	92.232.2013.1
	3	92.232.3003.1	92.232.3013.1
	4	92.232.4003.1	92.232.4013.1
	5	92.232.5003.1	92.232.5013.1
	6	92.232.6003.1	92.232.6013.1
	7	92.232.7003.1	92.232.7013.1
	8	92.232.8003.1	92.232.8013.1

Cable color:	□ white	□ white	■ black
Color of coding:	□ white		
Marking of poles:	L, N, PE		
Application:	Mains 250 V		
	1	92.232.1003.2	92.232.1013.2
	2	92.232.2003.2	92.232.2013.2
	3	92.232.3003.2	92.232.3013.2
	4	92.232.4003.2	92.232.4013.2
	5	92.232.5003.2	92.232.5013.2
	6	92.232.6003.2	92.232.6013.2
	7	92.232.7003.2	92.232.7013.2
	8	92.232.8003.2	92.232.8013.2

Cable color:	■ black	■ black	
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	UPS 250 V		
	1	92.232.1003.3	92.232.1013.3
	2	92.232.2003.3	92.232.2013.3
	3	92.232.3003.3	92.232.3013.3
	4	92.232.4003.3	92.232.4013.3
	5	92.232.5003.3	92.232.5013.3
	6	92.232.6003.3	92.232.6013.3
	7	92.232.7003.3	92.232.7013.3
	8	92.232.8003.3	92.232.8013.3

Cable color:	■ black		
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	UPS 250 V		
	1	92.297.1003.0	
	2	92.297.2003.0	
	3	92.297.3003.0	
	4	92.297.4003.0	
	5	92.297.5003.0	
	6	92.297.6003.0	
	7	92.297.7003.0	
	8	92.297.8003.0	

Cable color:	■ black	■ black	
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	Mains 250 V		
	1	92.232.1003.5	92.232.1013.5
	2	92.232.2003.5	92.232.2013.5
	3	92.232.3003.5	92.232.3013.5
	4	92.232.4003.5	92.232.4013.5
	5	92.232.5003.5	92.232.5013.5
	6	92.232.6003.5	92.232.6013.5
	7	92.232.7003.5	92.232.7013.5
	8	92.232.8003.5	92.232.8013.5

Cable color:	■ black		
Color of coding:	■ black		
Marking of poles:	1, 2, 3		
Application:	Switch function 250 V		
	1	92.232.1003.4	
	2	92.232.2003.4	
	3	92.232.3003.4	
	4	92.232.4003.4	
	5	92.232.5003.4	
	6	92.232.6003.4	
	7	92.232.7003.4	
	8	92.232.8003.4	

Cable color:	■ black		
Color of coding:	■ black		
Marking of poles:	1, PE, 2/N		
Application:	Acc. to customer requirements (with PE)		
	1	92.297.1003.7	
	2	92.297.2003.7	
	3	92.297.3003.7	
	4	92.297.4003.7	
	5	92.297.5003.7	
	6	92.297.6003.7	
	7	92.297.7003.7	
	8	92.297.8003.7	

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage:	250V	Lockable:	Yes
Rated current:	16 A	Preparation of conductor ends:	Ultrasonically compressed wire ends
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

Connection cable, female - free end

H05Z1Z1-F

Halogen free

RZ1 0.6/1kV

halogen free

Length (m)

Part No.

Part No.

Cable color:	■ black	1	92.232.1063.1	■ black	92.232.1063.1
Color of coding:	■ black	2	92.232.2063.1	■ black	G2.232.2063.1
Marking of poles:	L, N, PE	3	92.232.3063.1	■ black	G2.232.3063.1
Application:	Mains 250 V	4	92.232.4063.1	■ black	G2.232.4063.1
		5	92.232.5063.1	■ black	G2.232.5063.1
		6	92.232.6063.1	■ black	G2.232.6063.1
		7	92.232.7063.1		
		8	92.232.8063.1		

Cable color:	□ white	1	92.232.1063.2	□ white	G2.232.1063.2
Color of coding:	□ white	2	92.232.2063.2	□ white	G2.232.2063.2
Marking of poles:	L, N, PE	3	92.232.3063.2	□ white	G2.232.3063.2
Application:	Mains 250 V	4	92.232.4063.2	□ white	G2.232.4063.2
		5	92.232.5063.2	□ white	G2.232.5063.2
		6	92.232.6063.2	□ white	G2.232.6063.2
		7	92.232.7063.2		
		8	92.232.8063.2		

Cable color:	■ black	1	92.232.1063.3	■ black	92.232.1063.3
Color of coding:	■ black	2	92.232.2063.3	■ black	92.232.2063.3
Marking of poles:	L, N, PE	3	92.232.3063.3	■ black	92.232.3063.3
Application:	UPS 250 V	4	92.232.4063.3	■ black	92.232.4063.3
		5	92.232.5063.3	■ black	92.232.5063.3
		6	92.232.6063.3	■ black	92.232.6063.3
		7	92.232.7063.3	■ black	92.232.7063.3
		8	92.232.8063.3	■ black	92.232.8063.3

Cable color:	■ black	1	92.297.1063.0	■ black	92.297.1063.0
Color of coding:	■ black	2	92.297.2063.0	■ black	92.297.2063.0
Marking of poles:	L, N, PE	3	92.297.3063.0	■ black	92.297.3063.0
Application:	UPS 250 V	4	92.297.4063.0	■ black	92.297.4063.0
		5	92.297.5063.0	■ black	92.297.5063.0
		6	92.297.6063.0	■ black	92.297.6063.0
		7	92.297.7063.0	■ black	92.297.7063.0
		8	92.297.8063.0	■ black	92.297.8063.0

Cable color:	■ black	1	92.232.1063.5	■ black	92.232.1063.5
Color of coding:	■ black	2	92.232.2063.5	■ black	92.232.2063.5
Marking of poles:	L, N, PE	3	92.232.3063.5	■ black	92.232.3063.5
Application:	Mains 250 V	4	92.232.4063.5	■ black	92.232.4063.5
		5	92.232.5063.5	■ black	92.232.5063.5
		6	92.232.6063.5	■ black	92.232.6063.5
		7	92.232.7063.5	■ black	92.232.7063.5
		8	92.232.8063.5	■ black	92.232.8063.5

Cable color:	■ black	1	92.232.1063.4	■ black	92.232.1063.4
Color of coding:	■ black	2	92.232.2063.4	■ black	92.232.2063.4
Marking of poles:	1, 2, 3	3	92.232.3063.4	■ black	92.232.3063.4
Application:	Switch function	4	92.232.4063.4	■ black	92.232.4063.4
	250 V	5	92.232.5063.4	■ black	92.232.5063.4
		6	92.232.6063.4	■ black	92.232.6063.4
		7	92.232.7063.4	■ black	92.232.7063.4
		8	92.232.8063.4	■ black	92.232.8063.4

Cable color:	■ black	1	92.297.1063.7	■ black	92.297.1063.7
Color of coding:	■ black	2	92.297.2063.7	■ black	92.297.2063.7
Marking of poles:	1, PE, 2/N	3	92.297.3063.7	■ black	92.297.3063.7
Application:	Acc. to customer	4	92.297.4063.7	■ black	92.297.4063.7
	requirements (with	5	92.297.5063.7	■ black	92.297.5063.7
	PE)	6	92.297.6063.7	■ black	92.297.6063.7
		7	92.297.7063.7	■ black	92.297.7063.7
		8	92.297.8063.7	■ black	92.297.8063.7

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

Connection cable, male - free end

	H05VV-F halogenated	H05V2V2-F halogenated	H07RN-F halogenated
Length (m)	Part No.	Part No.	Part No.

Cable color:	■ black	■ black	■ black
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	Mains 250 V		
	1	92.232.1004.1	92.232.1014.1
	2	92.232.2004.1	92.232.2014.1
	3	92.232.3004.1	92.232.3014.1
	4	92.232.4004.1	92.232.4014.1
	5	92.232.5004.1	92.232.5014.1
	6	92.232.6004.1	92.232.6014.1
	7	92.232.7004.1	92.232.7014.1
	8	92.232.8004.1	92.232.8014.1
			G3.432.0102.1
			G3.432.0202.1
			G3.432.0302.1
			G3.432.0402.1
			G3.432.0502.1
			G3.432.0602.1

Cable color:	□ white	□ white	■ black
Color of coding:	□ white		
Marking of poles:	L, N, PE		
Application:	Mains 250 V		
	1	92.232.1004.2	92.232.1014.2
	2	92.232.2004.2	92.232.2014.2
	3	92.232.3004.2	92.232.3014.2
	4	92.232.4004.2	92.232.4014.2
	5	92.232.5004.2	92.232.5014.2
	6	92.232.6004.2	92.232.6014.2
	7	92.232.7004.2	92.232.7014.2
	8	92.232.8004.2	92.232.8014.2
			G3.432.0102.2
			G3.432.0302.2


Cable color:	■ black	■ black	
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	UPS 250 V		
	1	92.232.1004.3	92.232.1014.3
	2	92.232.2004.3	92.232.2014.3
	3	92.232.3004.3	92.232.3014.3
	4	92.232.4004.3	92.232.4014.3
	5	92.232.5004.3	92.232.5014.3
	6	92.232.6004.3	92.232.6014.3
	7	92.232.7004.3	92.232.7014.3
	8	92.232.8004.3	92.232.8014.3

Cable color:	■ black		
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	UPS 250 V		
	1	92.297.1004.0	
	2	92.297.2004.0	
	3	92.297.3004.0	
	4	92.297.4004.0	
	5	92.297.5004.0	
	6	92.297.6004.0	
	7	92.297.7004.0	
	8	92.297.8004.0	

Cable color:	■ black	■ black	
Color of coding:	■ black		
Marking of poles:	L, N, PE		
Application:	Mains 250 V		
	1	92.232.1004.5	92.232.1014.5
	2	92.232.2004.5	92.232.2014.5
	3	92.232.3004.5	92.232.3014.5
	4	92.232.4004.5	92.232.4014.5
	5	92.232.5004.5	92.232.5014.5
	6	92.232.6004.5	92.232.6014.5
	7	92.232.7004.5	92.232.7014.5
	8	92.232.8004.5	92.232.8014.5

Cable color:	■ black		
Color of coding:	■ black		
Marking of poles:	1, 2, 3		
Application:	Switch function 250 V		
	1	92.232.1004.4	
	2	92.232.2004.4	
	3	92.232.3004.4	
	4	92.232.4004.4	
	5	92.232.5004.4	
	6	92.232.6004.4	
	7	92.232.7004.4	
	8	92.232.8004.4	

Cable color:	■ black		
Color of coding:	■ black		
Marking of poles:	1, PE, 2/N		
Application:	Acc. to customer requirements (with PE)		
	1	92.297.1004.7	
	2	92.297.2004.7	
	3	92.297.3004.7	
	4	92.297.4004.7	
	5	92.297.5004.7	
	6	92.297.6004.7	
	7	92.297.7004.7	
	8	92.297.8004.7	

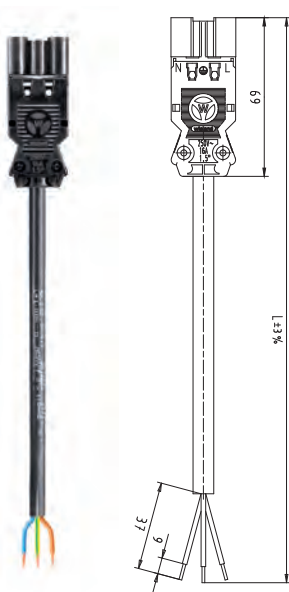

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage:	250V	Lockable:	Yes
Rated current:	16 A	Preparation of conductor ends:	Ultrasonically compressed wire ends
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

Connection cable, male - free end

H05Z1Z1-F

halogen free

RZ1 0.6/1kV

halogen free

Length (m)

Part No.

Part No.

Cable color:	■ black	1	92.232.1064.1	■ black	92.232.1064.1
Color of coding:	■ black	2	92.232.2064.1	■ black	G2.232.2064.1
Marking of poles:	L, N, PE	3	92.232.3064.1	■ black	G2.232.3064.1
Application:	Mains 250 V	4	92.232.4064.1	■ black	G2.232.4064.1
		5	92.232.5064.1	■ black	G2.232.5064.1
		6	92.232.6064.1	■ black	G2.232.6064.1
		7	92.232.7064.1	■ black	G2.232.7064.1
		8	92.232.8064.1	■ black	G2.232.8064.1

Cable color:	□ white	1	92.232.1064.2	□ white	G2.232.1064.2
Color of coding:	□ white	2	92.232.2064.2	□ white	G2.232.2064.2
Marking of poles:	L, N, PE	3	92.232.3064.2	□ white	G2.232.3064.2
Application:	Mains 250 V	4	92.232.4064.2	□ white	G2.232.4064.2
		5	92.232.5064.2	□ white	G2.232.5064.2
		6	92.232.6064.2	□ white	G2.232.6064.2
		7	92.232.7064.2	□ white	G2.232.7064.2
		8	92.232.8064.2	□ white	G2.232.8064.2

Cable color:	■ black	1	92.232.1064.3	■ black	92.232.1064.3
Color of coding:	■ black	2	92.232.2064.3	■ black	92.232.2064.3
Marking of poles:	L, N, PE	3	92.232.3064.3	■ black	92.232.3064.3
Application:	UPS 250 V	4	92.232.4064.3	■ black	92.232.4064.3
		5	92.232.5064.3	■ black	92.232.5064.3
		6	92.232.6064.3	■ black	92.232.6064.3
		7	92.232.7064.3	■ black	92.232.7064.3
		8	92.232.8064.3	■ black	92.232.8064.3

Cable color:	■ black	1	92.297.1064.0	■ black	92.297.1064.0
Color of coding:	■ black	2	92.297.2064.0	■ black	92.297.2064.0
Marking of poles:	■ tomato red	3	92.297.3064.0	■ black	92.297.3064.0
Application:	L, N, PE	4	92.297.4064.0	■ black	92.297.4064.0
	UPS 250 V	5	92.297.5064.0	■ black	92.297.5064.0
		6	92.297.6064.0	■ black	92.297.6064.0
		7	92.297.7064.0	■ black	92.297.7064.0
		8	92.297.8064.0	■ black	92.297.8064.0

Cable color:	■ black	1	92.232.1064.5	■ black	92.232.1064.5
Color of coding:	■ black	2	92.232.2064.5	■ black	92.232.2064.5
Marking of poles:	■ salmon pink	3	92.232.3064.5	■ black	92.232.3064.5
Application:	L, N, PE	4	92.232.4064.5	■ black	92.232.4064.5
	Mains 250 V	5	92.232.5064.5	■ black	92.232.5064.5
		6	92.232.6064.5	■ black	92.232.6064.5
		7	92.232.7064.5	■ black	92.232.7064.5
		8	92.232.8064.5	■ black	92.232.8064.5

Cable color:	■ black	1	92.232.1064.4	■ black	92.232.1064.4
Color of coding:	■ black	2	92.232.2064.4	■ black	92.232.2064.4
Marking of poles:	■ brown	3	92.232.3064.4	■ black	92.232.3064.4
Application:	1, 2, 3	4	92.232.4064.4	■ black	92.232.4064.4
	Switch function	5	92.232.5064.4	■ black	92.232.5064.4
	250 V	6	92.232.6064.4	■ black	92.232.6064.4
		7	92.232.7064.4	■ black	92.232.7064.4
		8	92.232.8064.4	■ black	92.232.8064.4


Cable color:	■ black	1	92.297.1064.7	■ black	92.297.1064.7
Color of coding:	■ black	2	92.297.2064.7	■ black	92.297.2064.7
Marking of poles:	■ may green	3	92.297.3064.7	■ black	92.297.3064.7
Application:	1, PE, 2/N	4	92.297.4064.7	■ black	92.297.4064.7
	Acc. to customer	5	92.297.5064.7	■ black	92.297.5064.7
	requirements (with	6	92.297.6064.7	■ black	92.297.6064.7
	PE)	7	92.297.7064.7	■ black	92.297.7064.7
		8	92.297.8064.7	■ black	92.297.8064.7

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

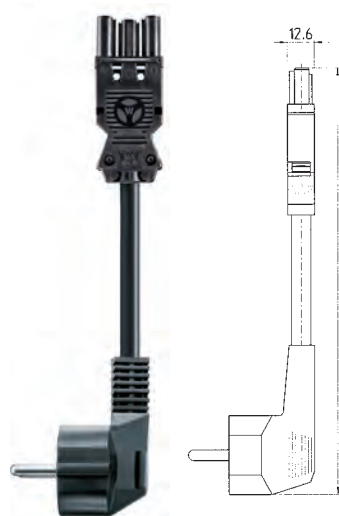

Mains connection cable, female - male CEE 7/4

H05VV-F
 halogenated
 Part No.

Length (m)

Cable color:	■ black	1	92.232.1007.1
Color of coding:	■ black	2	92.232.2007.1
Marking of poles:	L, N, PE	3	92.232.3007.1
Application:	Mains 250 V	4	92.232.4007.1
		5	92.232.5007.1
		6	92.232.6007.1
		7	92.232.7007.1
		8	92.232.8007.1

Cable color:	□ white	1	92.232.1007.2
Color of coding:	□ white	2	92.232.2007.2
Marking of poles:	L, N, PE	3	92.232.3007.2
Application:	Mains 250 V	4	92.232.4007.2
		5	92.232.5007.2
		6	92.232.6007.2
		7	92.232.7007.2
		8	92.232.8007.2


Cable color:	■ black	2	92.232.2007.5
Color of coding:	■ black	3	92.232.3007.5
Marking of poles:	L, N, PE		
Application:	Mains 250 V		

Cable assemblies, 3-pole

2.5 mm², 20 A

Rated voltage: 250V
 Rated current: 20 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

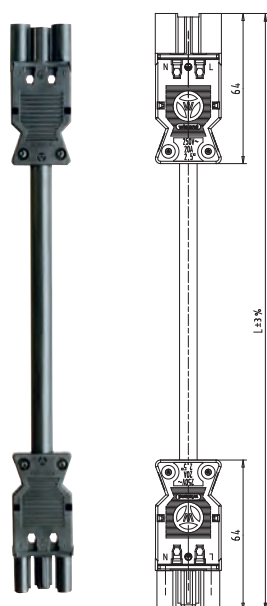

Connecting cable, female - male


		H05VV-F halogenated	H05V2V2-F halogenated	H07RN-F halogenated
	Length (m)	Part No.	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1000.1	92.238.1010.1	G3.032.0103.1
	2	92.238.2000.1	92.238.2010.1	G3.032.0203.1
	3	92.238.3000.1	92.238.3010.1	G3.032.0303.1
	4	92.238.4000.1	92.238.4010.1	G3.032.0403.1
	5	92.238.5000.1	92.238.5010.1	G3.032.0503.1
	6	92.238.6000.1	92.238.6010.1	G3.032.0603.1
	7	92.238.7000.1	92.238.7010.1	G3.032.0703.1
	8	92.238.8000.1	92.238.8010.1	G3.032.0803.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1000.2	92.238.1010.2	G3.032.0103.2
	2	92.238.2000.2	92.238.2010.2	G3.032.0203.2
	3	92.238.3000.2	92.238.3010.2	G3.032.0303.2
	4	92.238.4000.2	92.238.4010.2	G3.032.0403.2
	5	92.238.5000.2	92.238.5010.2	G3.032.0503.2
	6	92.238.6000.2	92.238.6010.2	G3.032.0603.2
	7	92.238.7000.2	92.238.7010.2	G3.032.0703.2
	8	92.238.8000.2	92.238.8010.2	G3.032.0803.2
Cable color: ■ pebble gray Color of coding: ■ pebble gray Marking of poles: L, N, PE Application: UPS 250 V	1	92.238.1000.3	92.238.1010.3	
	2	92.238.2000.3	92.238.2010.3	
	3	92.238.3000.3	92.238.3010.3	
	4	92.238.4000.3	92.238.4010.3	
	5	92.238.5000.3	92.238.5010.3	
	6	92.238.6000.3	92.238.6010.3	
	7	92.238.7000.3	92.238.7010.3	
	8	92.238.8000.3	92.238.8010.3	
Cable color: ■ salmon pink Color of coding: ■ salmon pink Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1000.5	92.238.1010.5	
	2	92.238.2000.5	92.238.2010.5	
	3	92.238.3000.5	92.238.3010.5	
	4	92.238.4000.5	92.238.4010.5	
	5	92.238.5000.5	92.238.5010.5	
	6	92.238.6000.5	92.238.6010.5	
	7	92.238.7000.5	92.238.7010.5	
	8	92.238.8000.5	92.238.8010.5	
Cable color: ■ brown Color of coding: ■ brown Marking of poles: 1, 2, 3 Application: Switch function 250 V	1	92.238.1000.4		
	2	92.238.2000.4		
	3	92.238.3000.4		
	4	92.238.4000.4		
	5	92.238.5000.4		
	6	92.238.6000.4		
	7	92.238.7000.4		
	8	92.238.8000.4		

Cable assemblies, 3-pole

2.5 mm², 20 A

Rated voltage: 250V
 Rated current: 20 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

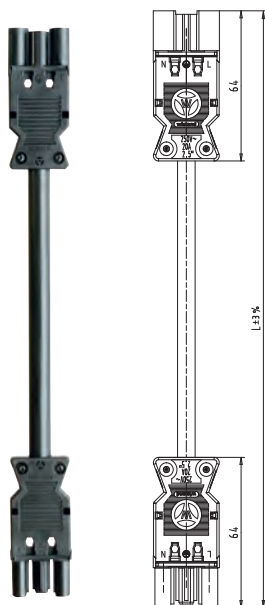

Connecting cable, female - male


			H05Z1Z1-F halogen free	RZ1 0.6/1kV halogen free
		Length (m)	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V		1	92.238.1060.1	G2.238.1060.1
		2	92.238.2060.1	G2.238.2060.1
		3	92.238.3060.1	G2.238.3060.1
		4	92.238.4060.1	G2.238.4060.1
		5	92.238.5060.1	G2.238.5060.1
		6	92.238.6060.1	G2.238.6060.1
		7	92.238.7060.1	G2.238.7060.1
		8	92.238.8060.1	G2.238.8060.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V		1	92.238.1060.2	G2.238.1060.2
		2	92.238.2060.2	G2.238.2060.2
		3	92.238.3060.2	G2.238.3060.2
		4	92.238.4060.2	G2.238.4060.2
		5	92.238.5060.2	G2.238.5060.2
		6	92.238.6060.2	G2.238.6060.2
		7	92.238.7060.2	G2.238.7060.2
		8	92.238.8060.2	G2.238.8060.2
Cable color: ■ pebble gray Color of coding: ■ pebble gray Marking of poles: L, N, PE Application: UPS 250 V		1	92.238.1060.3	
		2	92.238.2060.3	
		3	92.238.3060.3	
		4	92.238.4060.3	
		5	92.238.5060.3	
		6	92.238.6060.3	
		7	92.238.7060.3	
		8	92.238.8060.3	
Cable color: ■ tomato red Color of coding: ■ tomato red Marking of poles: L, N, PE Application: UPS 250 V		4	92.298.4060.0	
Cable color: ■ black Color of coding: ■ salmon pink Marking of poles: L, N, PE Application: Mains 250 V		1	92.238.1060.5	
		2	92.238.2060.5	
		3	92.238.3060.5	
		4	92.238.4060.5	
		5	92.238.5060.5	
		6	92.238.6060.5	
		7	92.238.7060.5	
		8	92.238.8060.5	
Cable color: ■ brown Color of coding: ■ brown Marking of poles: 1, 2, 3 Application: Switch function 250 V		1	92.238.1060.4	
		2	92.238.2060.4	
		3	92.238.3060.4	
		4	92.238.4060.4	
		5	92.238.5060.4	
		6	92.238.6060.4	
		7	92.238.7060.4	
		8	92.238.8060.4	
Cable color: ■ may green Color of coding: ■ may green Marking of poles: 1, PE, 2/N Application: Acc. to customer requirements (with PE)		1	92.298.1060.7	
		2	92.298.2060.7	
		3	92.298.3060.7	
		4	92.298.4060.7	
		5	92.298.5060.7	
		6	92.298.6060.7	
		7	92.298.7060.7	
		8	92.298.8060.7	

Cable assemblies, 3-pole

2.5 mm², 20 A

Rated voltage: 250V
 Rated current: 20 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

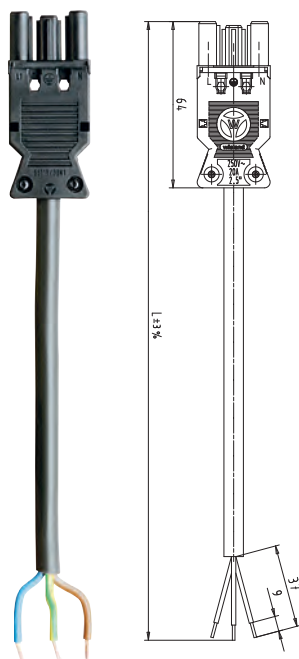

Connection cable, female - free end


		H05VV-F halogenated	H05V2V2-F halogenated	H07RN-F halogenated
	Length (m)	Part No.	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1003.1	92.238.1013.1	G3.332.0103.1
	2	92.238.2003.1	92.238.2013.1	G3.332.0203.1
	3	92.238.3003.1	92.238.3013.1	G3.332.0303.1
	4	92.238.4003.1	92.238.4013.1	G3.332.0403.1
	5	92.238.5003.1	92.238.5013.1	G3.332.0503.1
	6	92.238.6003.1	92.238.6013.1	
	7	92.238.7003.1	92.238.7013.1	G3.332.0703.1
	8	92.238.8003.1	92.238.8013.1	G3.332.0803.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1003.2	92.238.1013.2	G3.332.0103.2
	2	92.238.2003.2	92.238.2013.2	G3.332.0203.2
	3	92.238.3003.2	92.238.3013.2	G3.332.0303.2
	4	92.238.4003.2	92.238.4013.2	
	5	92.238.5003.2	92.238.5013.2	G3.332.0503.2
	6	92.238.6003.2	92.238.6013.2	
	7	92.238.7003.2	92.238.7013.2	G3.332.0703.2
	8	92.238.8003.2	92.238.8013.2	
Cable color: ■ pebble gray Color of coding: ■ pebble gray Marking of poles: L, N, PE Application: UPS 250 V	1	92.238.1003.3	92.238.1013.3	
	2	92.238.2003.3	92.238.2013.3	
	3	92.238.3003.3	92.238.3013.3	
	4	92.238.4003.3	92.238.4013.3	
	5	92.238.5003.3	92.238.5013.3	
	6	92.238.6003.3	92.238.6013.3	
	7	92.238.7003.3	92.238.7013.3	
	8	92.238.8003.3	92.238.8013.3	
Cable color: ■ salmon pink Color of coding: ■ salmon pink Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1003.5	92.238.1013.5	
	2	92.238.2003.5	92.238.2013.5	
	3	92.238.3003.5	92.238.3013.5	
	4	92.238.4003.5	92.238.4013.5	
	5	92.238.5003.5	92.238.5013.5	
	6	92.238.6003.5	92.238.6013.5	
	7	92.238.7003.5	92.238.7013.5	
	8	92.238.8003.5	92.238.8013.5	
Cable color: ■ brown Color of coding: ■ brown Marking of poles: 1, 2, 3 Application: Switch function 250 V	1	92.238.1003.4		
	2	92.238.2003.4		
	3	92.238.3003.4		
	4	92.238.4003.4		
	5	92.238.5003.4		
	6	92.238.6003.4		
	7	92.238.7003.4		
	8	92.238.8003.4		

Cable assemblies, 3-pole

2.5 mm², 20 A

Rated voltage: 250V
 Rated current: 20 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

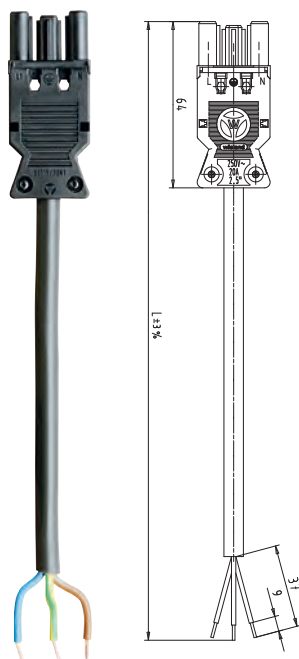

Connection cable, female - free end

H05Z1Z1-F

halogen free

RZ1 0.6/1kV

halogen free


	Length (m)	Part No.	Part No.
Cable color: ■ black		■ black	■ black
Color of coding: ■ black	1	92.238.1063.1	G2.238.1063.1
Marking of poles: L, N, PE	2	92.238.2063.1	G2.238.2063.1
Application: Mains 250 V	3	92.238.3063.1	G2.238.3063.1
	4	92.238.4063.1	G2.238.4063.1
	5	92.238.5063.1	G2.238.5063.1
	6	92.238.6063.1	G2.238.6063.1
	7	92.238.7063.1	G2.238.7063.1
	8	92.238.8063.1	G2.238.8063.1
Cable color: □ white		□ white	□ white
Color of coding: □ white	1	92.238.1063.2	
Marking of poles: L, N, PE	2	92.238.2063.2	G2.238.2063.2
Application: Mains 250 V	3	92.238.3063.2	G2.238.3063.2
	4	92.238.4063.2	G2.238.4063.2
	5	92.238.5063.2	G2.238.5063.2
	6	92.238.6063.2	G2.238.6063.2
	7	92.238.7063.2	G2.238.7063.2
	8	92.238.8063.2	G2.238.8063.2
Cable color: ■ black		■ black	
Color of coding: ■ pebble gray	1	92.238.1063.3	
Marking of poles: L, N, PE	2	92.238.2063.3	
Application: UPS 250 V	3	92.238.3063.3	
	4	92.238.4063.3	
	5	92.238.5063.3	
	6	92.238.6063.3	
	7	92.238.7063.3	
	8	92.238.8063.3	
Cable color: ■ black		■ black	
Color of coding: ■ salmon pink	1	92.238.1063.5	
Marking of poles: L, N, PE	2	92.238.2063.5	
Application: Mains 250 V	3	92.238.3063.5	
	4	92.238.4063.5	
	5	92.238.5063.5	
	6	92.238.6063.5	
	7	92.238.7063.5	
	8	92.238.8063.5	
Cable color: ■ black		■ black	
Color of coding: ■ brown	1	92.238.1063.4	
Marking of poles: 1, 2, 3	2	92.238.2063.4	
Application: Switch function 250 V	3	92.238.3063.4	
	4	92.238.4063.4	
	5	92.238.5063.4	
	6	92.238.6063.4	
	7	92.238.7063.4	
	8	92.238.8063.4	
Cable color: ■ black		■ black	
Color of coding: ■ may green	1	92.298.1063.7	
Marking of poles: 1, PE, 2/N	2	92.298.2063.7	
Application: Acc. to customer requirements (with PE)	3	92.298.3063.7	
	4	92.298.4063.7	
	5	92.298.5063.7	
	6	92.298.6063.7	
	7	92.298.7063.7	
	8	92.298.8063.7	

Cable assemblies, 3-pole

2.5 mm², 20 A

Rated voltage: 250V
 Rated current: 20 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

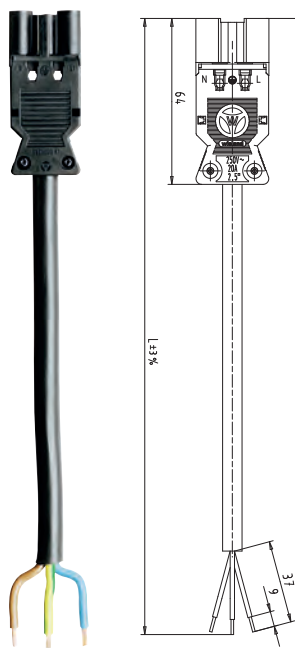

Connection cable, male - free end


		H05VV-F halogenated	H05V2V2-F halogenated	H07RN-F halogenated
	Length (m)	Part No.	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1004.1	92.238.1014.1	G3.432.0103.1
	2	92.238.2004.1	92.238.2014.1	G3.432.0203.1
	3	92.238.3004.1	92.238.3014.1	G3.432.0303.1
	4	92.238.4004.1	92.238.4014.1	G3.432.0403.1
	5	92.238.5004.1	92.238.5014.1	G3.432.0503.1
	6	92.238.6004.1	92.238.6014.1	G3.432.0603.1
	7	92.238.7004.1	92.238.7014.1	G3.432.0703.1
	8	92.238.8004.1	92.238.8014.1	G3.432.0803.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1004.2	92.238.1014.2	G3.432.0103.2
	2	92.238.2004.2	92.238.2014.2	
	3	92.238.3004.2	92.238.3014.2	G3.432.0303.2
	4	92.238.4004.2	92.238.4014.2	G3.432.0403.2
	5	92.238.5004.2	92.238.5014.2	G3.432.0503.2
	6	92.238.6004.2	92.238.6014.2	G3.432.0603.2
	7	92.238.7004.2	92.238.7014.2	G3.432.0703.2
	8	92.238.8004.2	92.238.8014.2	
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: UPS 250 V	1	92.238.1004.3	92.238.1014.3	
	2	92.238.2004.3	92.238.2014.3	
	3	92.238.3004.3	92.238.3014.3	
	4	92.238.4004.3	92.238.4014.3	
	5	92.238.5004.3	92.238.5014.3	
	6	92.238.6004.3	92.238.6014.3	
	7	92.238.7004.3	92.238.7014.3	
	8	92.238.8004.3	92.238.8014.3	
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1004.5	92.238.1014.5	
	2	92.238.2004.5	92.238.2014.5	
	3	92.238.3004.5	92.238.3014.5	
	4	92.238.4004.5	92.238.4014.5	
	5	92.238.5004.5	92.238.5014.5	
	6	92.238.6004.5	92.238.6014.5	
	7	92.238.7004.5	92.238.7014.5	
	8	92.238.8004.5	92.238.8014.5	
Cable color: ■ brown Color of coding: ■ brown Marking of poles: 1, 2, 3 Application: Switch function 250 V	1	92.238.1004.4		
	2	92.238.2004.4		
	3	92.238.3004.4		
	4	92.238.4004.4		
	5	92.238.5004.4		
	6	92.238.6004.4		
	7	92.238.7004.4		
	8	92.238.8004.4		

Cable assemblies, 3-pole

2.5 mm², 20 A

Rated voltage: 250V
 Rated current: 20 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

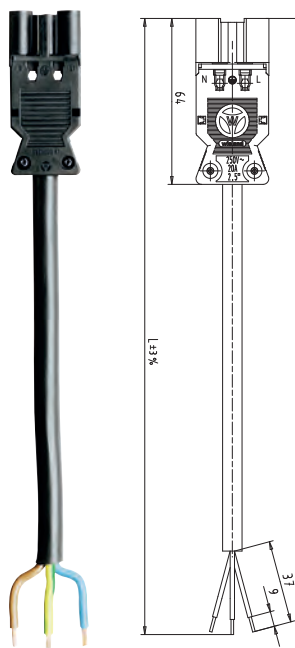

Connection cable, male - free end

		H05Z1Z1-F halogen free	RZ1 0.6/1kV halogen free
	Length (m)	Part No.	Part No.
Cable color: black Color of coding: black Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1064.1	G2.238.1064.1
	2	92.238.2064.1	G2.238.2064.1
	3	92.238.3064.1	G2.238.3064.1
	4	92.238.4064.1	G2.238.4064.1
	5	92.238.5064.1	G2.238.5064.1
	6	92.238.6064.1	G2.238.6064.1
	7	92.238.7064.1	G2.238.7064.1
	8	92.238.8064.1	G2.238.8064.1
Cable color: white Color of coding: white Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1064.2	G2.238.1064.2
	2	92.238.2064.2	G2.238.2064.2
	3	92.238.3064.2	G2.238.3064.2
	4	92.238.4064.2	
	5	92.238.5064.2	
	6	92.238.6064.2	G2.238.6064.2
	7	92.238.7064.2	G2.238.7064.2
	8	92.238.8064.2	
Cable color: pebble gray Color of coding: black Marking of poles: L, N, PE Application: UPS 250 V	1	92.238.1064.3	
	2	92.238.2064.3	
	3	92.238.3064.3	
	4	92.238.4064.3	
	5	92.238.5064.3	
	6	92.238.6064.3	
	7	92.238.7064.3	
	8	92.238.8064.3	
Cable color: salmon pink Color of coding: black Marking of poles: L, N, PE Application: Mains 250 V	1	92.238.1064.5	
	2	92.238.2064.5	
	3	92.238.3064.5	
	4	92.238.4064.5	
	5	92.238.5064.5	
	6	92.238.6064.5	
	7	92.238.7064.5	
	8	92.238.8064.5	
Cable color: brown Color of coding: black Marking of poles: 1, 2, 3 Application: Switch function 250 V	1	92.238.1064.4	
	2	92.238.2064.4	
	3	92.238.3064.4	
	4	92.238.4064.4	
	5	92.238.5064.4	
	6	92.238.6064.4	
	7	92.238.7064.4	
	8	92.238.8064.4	
Cable color: may green Color of coding: black Marking of poles: 1, PE, 2/N Application: Acc. to customer requirements (with PE)	1	92.298.1064.7	
	2	92.298.2064.7	
	3	92.298.3064.7	
	4	92.298.4064.7	
	5	92.298.5064.7	
	6	92.298.6064.7	
	7	92.298.7064.7	
	8	92.298.8064.7	

Connector, 4-pole


Screw connection

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1
Lockable:	Yes

Cross section fine-stranded:	0,75 - 2,5mm ²
Cross section solid:	0,75 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
for insulation and sheath strip lengths please see technical data	

female

male

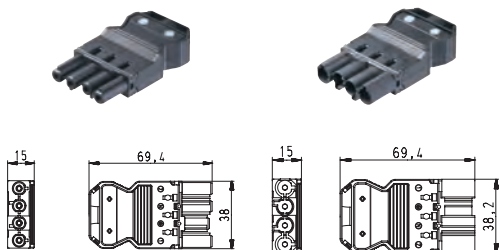

For cables Ø 6.5 - 12 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	2, N, PE, 1	92.943.3053.1	92.944.3053.1
□ white	Mains 250/400 V	2, N, PE, 1	92.943.3053.0	92.944.3053.0
■ pebble gray	UPS 250/400 V	2, N, PE, 1	92.943.3553.0	92.944.3553.0
■ tomato red	UPS 250/400 V	2, N, PE, 1	92.943.3553.5	92.944.3553.5
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N, 3	92.943.3253.0	92.944.3253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2/N, 3, 4	92.943.3353.0	92.944.3353.0


Spring force

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	2
Lockable:	Yes

Cross section fine-stranded:	0,75 - 1,5mm ²
Cross section solid:	0,75 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
for insulation and sheath strip lengths please see technical data	

female

male

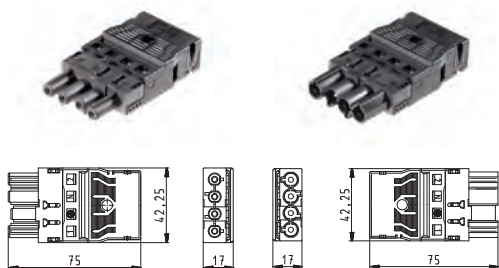

For cables Ø 9.5 - 11.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	2, N, PE, 1	92.943.0053.1	92.944.0053.1
□ white	Mains 250/400 V	2, N, PE, 1	92.943.0053.0	92.944.0053.0
■ pebble gray	UPS 250/400 V	2, N, PE, 1	92.943.0153.0	92.944.0153.0
■ tomato red	UPS 250/400 V	2, N, PE, 1	92.943.0153.5	92.944.0153.5
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N, 3	92.943.0353.0	92.944.0353.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2/N, 3, 4	92.943.0453.0	92.944.0453.0

Device connectors, 4-pole


Built-in component, Screw connection

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1

Lockable:	Yes
Cross section fine-stranded:	0,75 - 4mm ²
Cross section solid:	0,75 - 4mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

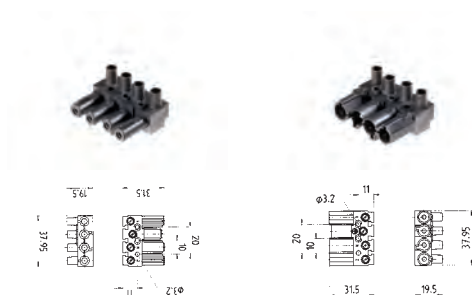

Single screw connection

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	2, N, PE, 1	92.041.3253.1	92.042.3353.1
□ white	Mains 250/400 V	2, N, PE, 1	92.041.3253.0	92.042.3353.0
■ pebble gray	UPS 250/400 V	2, 1, PE, N	92.041.3453.0	92.042.3453.0
■ tomato red	UPS 250/400 V	2, 1, PE, N	92.041.3453.5	92.042.3453.5
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N, 3	92.041.3553.0	92.042.3553.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2/N, 3, 4	92.041.3953.0	92.042.3953.0


Snap-in, Spring force

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	2

Lockable:	Yes
Cross section fine-stranded:	0,5 - 1,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

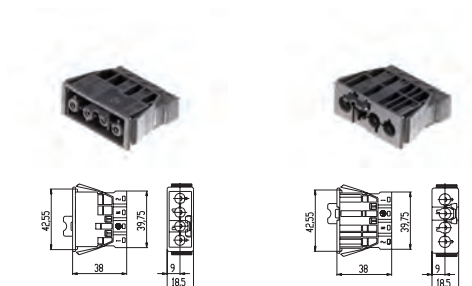

Housing material thickness 0.5-1.5 mm


Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	2, N, PE, 1	92.041.9658.1	92.042.9658.1
□ white	Mains 250/400 V	2, N, PE, 1	92.041.9658.0	92.042.9658.0
■ pebble gray	UPS 250/400 V	2, N, PE, 1	92.041.9758.0	92.042.9758.0
■ tomato red	UPS 250/400 V	2, N, PE, 1	92.041.9758.5	92.042.9758.5
■ may green	Acc. to customer requirements (with PE)	1, PE, 2/N, 3	92.041.8058.0	92.042.8058.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2/N, 3, 4	92.041.8258.0	92.042.8258.0

Device connectors, 4-pole


Solder connector, Soldering connection

Rated voltage:	250V/ 400V	Terminations per pole:	1
Rated current:	20 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2	Housing material:	Polyamide

female




male




horizontal, without fastening flange

horizontal, without fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	2, N, PE, 1	92.043.0058.1	92.044.0058.1
□ white	Mains 250/400 V	2, N, PE, 1	92.043.0058.0	92.044.0058.0
■ pebble	UPS 250/400 V	2, N, PE, 1	92.043.0158.0	92.044.0158.0
gray				
■ tomato red	UPS 250/400 V	2, N, PE, 1	92.043.0158.5	92.044.0158.5

female



male



vertical, without fastening flange

vertical, without fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	2, N, PE, 1	92.041.0058.1	92.042.0058.1
□ white	Mains 250/400 V	2, N, PE, 1	92.041.0058.0	92.042.0058.0
■ pebble gray	UPS 250/400 V	2, N, PE, 1	92.041.0158.0	92.042.0158.0

Distributors

Rated voltage:	250 / 400 V	Degree of protection (IP):	IP20, inserted IP40
Rated current:	20 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Interlock for vertical output has to be ordered separately	


H distributor

4-pole with option of mounting to 07.413.6853.1

Color of coding	Application	Outputs	Part No.
□ white	Mains 250/400 V	3	92.040.6953.0
■ black	Mains 250/400 V	3	92.040.6953.1
■ pebble gray	UPS 250/400 V	3	92.040.7053.0
■ tomato red	UPS 250/400 V	3	92.040.7053.5
■ turquoise	Acc. to customer requirements (without PE)	3	92.040.7153.0
■ may green	Acc. to customer requirements (with PE)	3	92.040.7253.0

Expected to be available from Q4 2017

T distributor

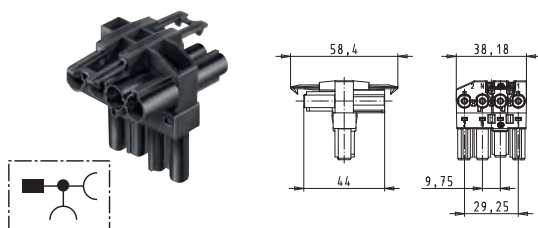

4-pole with interlock on both sides on feed-through level


Color of coding	Application	Outputs	Part No.
□ white	Mains 250/400 V	2	92.040.1053.0
■ black	Mains 250/400 V	2	92.040.1053.1
■ pebble gray	UPS 250/400 V	2	92.040.1153.0
■ tomato red	UPS 250/400 V	2	92.040.1153.5

Intermediate couplings

Rated voltage:	250 / 400 V	Degree of protection (IP):	IP20, inserted IP40
Rated current:	20 A	Interlock:	See Accessories
Rated impulse voltage:	4 kV		

4-pole with locking option

Color	Inputs	Outputs	Part No.
■ black	1, male	1, female	99.453.9910.0

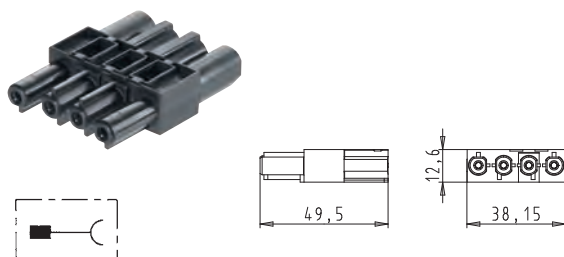


Cable assemblies, 4-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

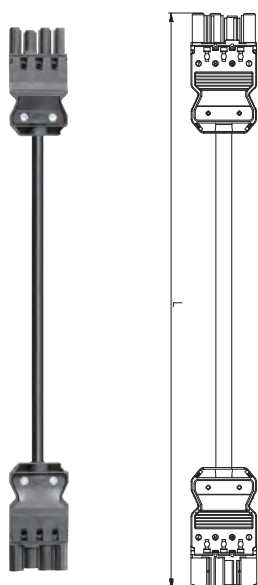

Connecting cable, female - male


			H05VV-F halogenated	H05V2V2-F halogenated	H05Z1Z1-F halogen free
		Length (m)	Part No.	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.207.1000.1	■ black	■ black	■ black
	2	92.207.2000.1	■ black	92.207.2010.1	92.207.1060.1
	3	92.207.3000.1	■ black	92.207.3010.1	92.207.2060.1
	4	92.207.4000.1	■ black	92.207.4010.1	92.207.3060.1
	5	92.207.5000.1	■ black	92.207.5010.1	92.207.4060.1
	6	92.207.6000.1	■ black		92.207.5060.1
	7	92.207.7000.1	■ black		92.207.6060.1
	8	92.207.8000.1	■ black		92.207.7060.1
Cable color: □ white Color of coding: □ white Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.207.1000.2	□ white	□ white	□ white
	2	92.207.2000.2	□ white		92.207.1060.2
	3	92.207.3000.2	□ white		92.207.2060.2
	4	92.207.4000.2	□ white		92.207.3060.2
	5	92.207.5000.2	□ white		92.207.4060.2
	6	92.207.6000.2	□ white		92.207.5060.2
	7	92.207.7000.2	□ white		92.207.6060.2
	8	92.207.8000.2	□ white		92.207.7060.2
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.207.1000.3	■ black	■ black	■ black
	2	92.207.2000.3	■ black		92.207.1060.3
	3	92.207.3000.3	■ black		92.207.2060.3
	4	92.207.4000.3	■ black		92.207.3060.3
	5	92.207.5000.3	■ black		92.207.4060.3
	6	92.207.6000.3	■ black		92.207.5060.3
	7	92.207.7000.3	■ black		92.207.6060.3
	8	92.207.8000.3	■ black		92.207.7060.3
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.207.1000.0	■ black	■ black	■ black
	2	92.207.2000.0	■ black		92.207.1060.0
	3	92.207.3000.0	■ black		92.207.2060.0
	4	92.207.4000.0	■ black		92.207.3060.0
	5	92.207.5000.0	■ black		92.207.4060.0
	6	92.207.6000.0	■ black		92.207.5060.0
	7	92.207.7000.0	■ black		92.207.6060.0
	8	92.207.8000.0	■ black		92.207.7060.0
Cable color: ■ black Color of coding: ■ black Marking of poles: 1, PE, 2/N, 3 Application: Acc. to customer requirements (with PE)	1	92.207.1000.7	■ black	■ black	■ black
	2	92.207.2000.7	■ black		92.207.1060.7
	3	92.207.3000.7	■ black		92.207.2060.7
	4	92.207.4000.7	■ black		92.207.3060.7
	5	92.207.5000.7	■ black		92.207.4060.7
	6	92.207.6000.7	■ black		92.207.5060.7
	7	92.207.7000.7	■ black		92.207.6060.7
	8	92.207.8000.7	■ black		92.207.7060.7
Cable color: ■ black Color of coding: ■ black Marking of poles: 1, 2/N, 3, 4 Application: Acc. to customer requirements (without PE)	1	92.207.1060.8	■ black	■ black	■ black
	2	92.207.2060.8	■ black		92.207.1060.8
	3	92.207.3060.8	■ black		92.207.2060.8
	4	92.207.4060.8	■ black		92.207.3060.8
	5	92.207.5060.8	■ black		92.207.4060.8
	6	92.207.6060.8	■ black		92.207.5060.8
	7	92.207.7060.8	■ black		92.207.6060.8
	8	92.207.8060.8	■ black		92.207.7060.8

Cable assemblies, 4-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

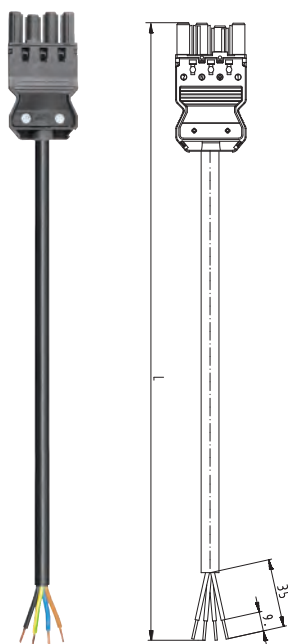

Connection cable, female - free end


		H05VV-F halogenated	H05V2V2-F halogenated	H05Z1Z1-F halogen free
	Length (m)	Part No.	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.207.1003.1	■ black	92.207.1063.1
	2	92.207.2003.1	92.207.2013.1	92.207.2063.1
	3	92.207.3003.1		92.207.3063.1
	4	92.207.4003.1		92.207.4063.1
	5	92.207.5003.1		92.207.5063.1
	6	92.207.6003.1		92.207.6063.1
	7	92.207.7003.1		92.207.7063.1
	8	92.207.8003.1		92.207.8063.1
Cable color: □ white Color of coding: □ white Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.207.1003.2	□ white	92.207.1063.2
	2	92.207.2003.2		92.207.2063.2
	3	92.207.3003.2		92.207.3063.2
	4	92.207.4003.2		92.207.4063.2
	5	92.207.5003.2		92.207.5063.2
	6	92.207.6003.2		92.207.6063.2
	7	92.207.7003.2		92.207.7063.2
	8	92.207.8003.2		92.207.8063.2
Cable color: ■ pebble gray Color of coding: ■ pebble gray Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.207.1003.3	■ black	92.207.1063.3
	2	92.207.2003.3		92.207.2063.3
	3	92.207.3003.3		92.207.3063.3
	4	92.207.4003.3		92.207.4063.3
	5	92.207.5003.3		92.207.5063.3
	6	92.207.6003.3		92.207.6063.3
	7	92.207.7003.3		92.207.7063.3
	8	92.207.8003.3		92.207.8063.3
Cable color: ■ tomato red Color of coding: ■ tomato red Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.207.1003.0	■ black	92.207.1063.0
	2	92.207.2003.0		92.207.2063.0
	3	92.207.3003.0		92.207.3063.0
	4	92.207.4003.0		92.207.4063.0
	5	92.207.5003.0		92.207.5063.0
	6	92.207.6003.0		92.207.6063.0
	7	92.207.7003.0		92.207.7063.0
	8	92.207.8003.0		92.207.8063.0
Cable color: ■ may green Color of coding: ■ may green Marking of poles: 1, PE, 2/N, 3 Application: Acc. to customer requirements (with PE)	1	92.207.1003.7	■ black	92.207.1063.7
	2	92.207.2003.7		92.207.2063.7
	3	92.207.3003.7		92.207.3063.7
	4	92.207.4003.7		92.207.4063.7
	5	92.207.5003.7		92.207.5063.7
	6	92.207.6003.7		92.207.6063.7
	7	92.207.7003.7		92.207.7063.7
	8	92.207.8003.7		92.207.8063.7
Cable color: ■ turquoise Color of coding: ■ turquoise Marking of poles: 1, 2/N, 3, 4 Application: Acc. to customer requirements (without PE)	1		■ black	92.207.1063.8
	2			92.207.2063.8
	3			92.207.3063.8
	4			92.207.4063.8
	5			92.207.5063.8
	6			92.207.6063.8
	7			92.207.7063.8
	8			92.207.8063.8

Cable assemblies, 4-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

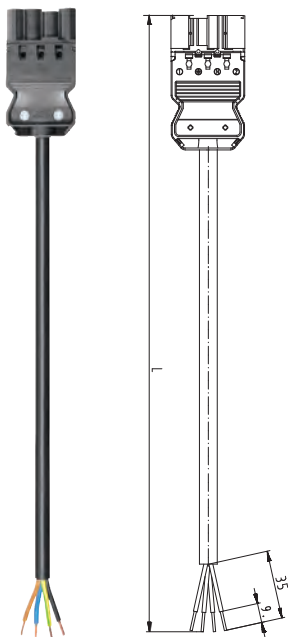

Connection cable, male - free end


		H05VV-F halogenated	H05V2V2-F halogenated	H05Z1Z1-F halogen free
	Length (m)	Part No.	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.207.1004.1	92.207.1014.1	92.207.1064.1
	2	92.207.2004.1	92.207.2014.1	92.207.2064.1
	3	92.207.3004.1	92.207.3014.1	92.207.3064.1
	4	92.207.4004.1	92.207.4014.1	92.207.4064.1
	5	92.207.5004.1	92.207.5014.1	92.207.5064.1
	6	92.207.6004.1		92.207.6064.1
	7	92.207.7004.1		92.207.7064.1
	8	92.207.8004.1		92.207.8064.1
Cable color: □ white Color of coding: □ white Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.207.1004.2		92.207.1064.2
	2	92.207.2004.2		92.207.2064.2
	3	92.207.3004.2		92.207.3064.2
	4	92.207.4004.2		92.207.4064.2
	5	92.207.5004.2		92.207.5064.2
	6	92.207.6004.2		92.207.6064.2
	7	92.207.7004.2		92.207.7064.2
	8	92.207.8004.2		92.207.8064.2
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.207.1004.3		92.207.1064.3
	2	92.207.2004.3		92.207.2064.3
	3	92.207.3004.3		92.207.3064.3
	4	92.207.4004.3		92.207.4064.3
	5	92.207.5004.3		92.207.5064.3
	6	92.207.6004.3		92.207.6064.3
	7	92.207.7004.3		92.207.7064.3
	8	92.207.8004.3		92.207.8064.3
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.207.1004.0		92.207.1064.0
	2	92.207.2004.0		92.207.2064.0
	3	92.207.3004.0		92.207.3064.0
	4	92.207.4004.0		92.207.4064.0
	5	92.207.5004.0		92.207.5064.0
	6	92.207.6004.0		92.207.6064.0
	7	92.207.7004.0		92.207.7064.0
	8	92.207.8004.0		92.207.8064.0
Cable color: ■ black Color of coding: ■ black Marking of poles: 1, PE, 2/N, 3 Application: Acc. to customer requirements (with PE)	1	92.207.1004.7		92.207.1064.7
	2	92.207.2004.7		92.207.2064.7
	3	92.207.3004.7		92.207.3064.7
	4	92.207.4004.7		92.207.4064.7
	5	92.207.5004.7		92.207.5064.7
	6	92.207.6004.7		92.207.6064.7
	7	92.207.7004.7		92.207.7064.7
	8	92.207.8004.7		92.207.8064.7
Cable color: ■ black Color of coding: ■ black Marking of poles: 1, 2/N, 3, 4 Application: Acc. to customer requirements (without PE)	1			92.207.1064.8
	2			92.207.2064.8
	3			92.207.3064.8
	4			92.207.4064.8
	5			92.207.5064.8
	6			92.207.6064.8
	7			92.207.7064.8
	8			92.207.8064.8

Cable assemblies, 4-pole

2.5 mm², 20 A

Rated voltage: 250V/ 400V
 Rated current: 20 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

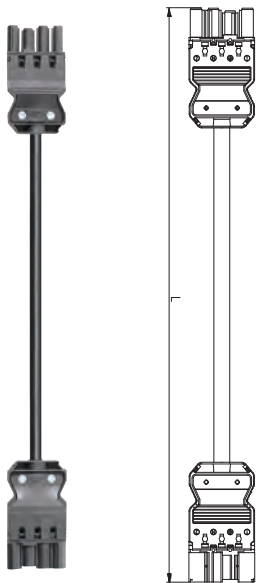

Connecting cable, female - male


		H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color: ■ black		■ black	■ black
Color of coding: ■ black			
Marking of poles: 2, N, PE, 1			
Application: Mains 250/400 V			
Length (m)	1	92.208.1000.1	92.208.1060.1
	2	92.208.2000.1	92.208.2060.1
	3	92.208.3000.1	92.208.3060.1
	4	92.208.4000.1	92.208.4060.1
	5	92.208.5000.1	92.208.5060.1
	6	92.208.6000.1	92.208.6060.1
	7	92.208.7000.1	92.208.7060.1
	8	92.208.8000.1	92.208.8060.1
Cable color: □ white		□ white	□ white
Color of coding: □ white			
Marking of poles: 2, N, PE, 1			
Application: Mains 250/400 V			
Length (m)	1	92.208.1000.2	92.208.1060.2
	2	92.208.2000.2	
	4	92.208.4000.2	92.208.4060.2
	5	92.208.5000.2	92.208.5060.2
	6	92.208.6000.2	92.208.6060.2
	7	92.208.7000.2	92.208.7060.2
	8	92.208.8000.2	92.208.8060.2
Cable color: ■ black		■ black	■ black
Color of coding: ■ pebble gray			
Marking of poles: 2, N, PE, 1			
Application: UPS 250/400 V			
Length (m)	1	92.208.1000.3	92.208.1060.3
	2	92.208.2000.3	92.208.2060.3
	3	92.208.3000.3	92.208.3060.3
	4	92.208.4000.3	92.208.4060.3
	5	92.208.5000.3	92.208.5060.3
	6	92.208.6000.3	92.208.6060.3
	7	92.208.7000.3	92.208.7060.3
	8	92.208.8000.3	92.208.8060.3

Cable assemblies, 4-pole

2.5 mm², 20 A


Rated voltage: 250V/ 400V
 Rated current: 20 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

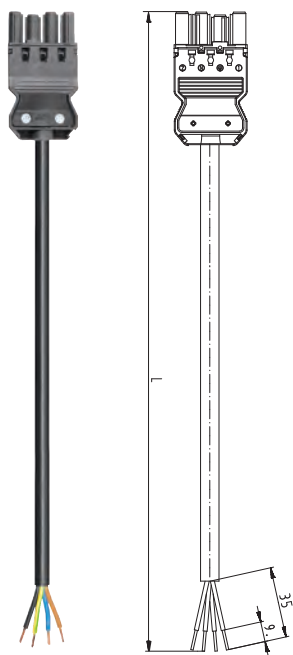

Connection cable, female - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
	Length (m)	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.208.1003.1	92.208.1063.1
	2	92.208.2003.1	92.208.2063.1
	3	92.208.3003.1	92.208.3063.1
	4	92.208.4003.1	92.208.4063.1
	5	92.208.5003.1	92.208.5063.1
	6	92.208.6003.1	92.208.6063.1
	7	92.208.7003.1	92.208.7063.1
	8	92.208.8003.1	92.208.8063.1
Cable color: □ white Color of coding: □ white Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.208.1003.2	92.208.1063.2
	2	92.208.2003.2	
	3	92.208.3003.2	
	4	92.208.4003.2	92.208.4063.2
	5	92.208.5003.2	92.208.5063.2
	6	92.208.6003.2	92.208.6063.2
	7	92.208.7003.2	92.208.7063.2
	8	92.208.8003.2	92.208.8063.2
Cable color: ■ pebble gray Color of coding: ■ pebble gray Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.208.1003.3	92.208.1063.3
	2	92.208.2003.3	92.208.2063.3
	3	92.208.3003.3	92.208.3063.3
	4	92.208.4003.3	92.208.4063.3
	5	92.208.5003.3	92.208.5063.3
	6	92.208.6003.3	92.208.6063.3
	7	92.208.7003.3	92.208.7063.3
	8	92.208.8003.3	92.208.8063.3

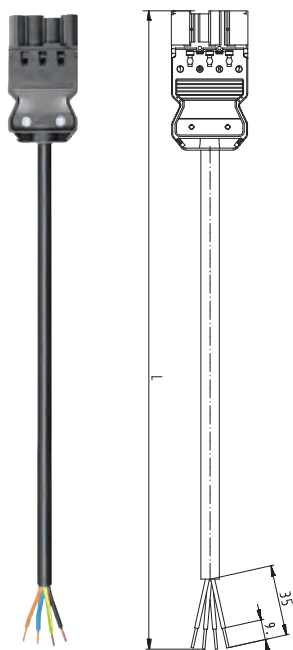

Connection cable, male - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
	Length (m)	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.208.1004.1	92.208.1064.1
	2	92.208.2004.1	92.208.2064.1
	3	92.208.3004.1	92.208.3064.1
	4	92.208.4004.1	92.208.4064.1
	5	92.208.5004.1	92.208.5064.1
	6	92.208.6004.1	92.208.6064.1
	7		92.208.7064.1
	8	92.208.8004.1	92.208.8064.1
Cable color: □ white Color of coding: □ white Marking of poles: 2, N, PE, 1 Application: Mains 250/400 V	1	92.208.1004.2	92.208.1064.2
	2	92.208.2004.2	
	3	92.208.3004.2	
	4	92.208.4004.2	92.208.4064.2
	5	92.208.5004.2	92.208.5064.2
	6	92.208.6004.2	92.208.6064.2
	7	92.208.7004.2	92.208.7064.2
	8	92.208.8004.2	92.208.8064.2
Cable color: ■ pebble gray Color of coding: ■ pebble gray Marking of poles: 2, N, PE, 1 Application: UPS 250/400 V	1	92.208.1004.3	92.208.1064.3
	2	92.208.2004.3	92.208.2064.3
	3	92.208.3004.3	92.208.3064.3
	4	92.208.4004.3	92.208.4064.3
	5	92.208.5004.3	92.208.5064.3
	6	92.208.6004.3	92.208.6064.3
	7	92.208.7004.3	92.208.7064.3
	8	92.208.8004.3	92.208.8064.3

Connector, 5-pole



Screw connection

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1
Lockable:	Yes

Cross section fine-stranded:	0,75 - 2,5mm ²
Cross section solid:	0,75 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
For insulation and sheath strip lengths please see technical data	

female

male



For cables Ø 8.5 - 12.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, N, PE, 2, 1	92.953.4053.1	92.954.4053.1
□ white	Mains 250/400 V	3, N, PE, 2, 1	92.953.4053.0	92.954.4053.0
■ pebble gray	UPS 250/400 V	3, N, PE, 2, 1	92.953.4553.0	92.954.4553.0
■ tomato red	UPS 250/400 V	3, N, PE, 2, 1	92.953.4553.5	92.954.4553.5
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	92.953.4453.0	92.954.4453.0
■ light blue	SELV	1, 2, 3, 4, 5	92.953.4153.0	92.954.4153.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3/N, 4	92.953.4253.0	92.954.4253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4/N, 5	92.953.4353.0	92.954.4353.0



Screw connection

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1
Lockable:	Yes

Cross section fine-stranded:	0,75 - 4mm ²
Cross section solid:	0,75 - 4mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
For insulation and sheath strip lengths please see technical data	

female

male



For cables Ø 11.5 - 15.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, N, PE, 2, 1	92.953.5053.1	92.954.5053.1
□ white	Mains 250/400 V	3, N, PE, 2, 1	92.953.5053.0	92.954.5053.0
■ pebble gray	UPS 250/400 V	3, N, PE, 2, 1	92.953.5553.0	92.954.5553.0
■ tomato red	UPS 250/400 V	3, N, PE, 2, 1	92.953.5553.5	92.954.5553.5
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	92.953.5453.0	92.954.5453.0
■ light blue	SELV	1, 2, 3, 4, 5	92.953.5153.0	92.954.5153.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3/N, 4	92.953.5253.0	92.954.5253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4/N, 5	92.953.5353.0	92.954.5353.0

Device connectors, 5-pole


Built-in component, Screw connection

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1

Lockable:	Yes
Cross section fine-stranded:	0,75 - 4mm ²
Cross section solid:	0,75 - 4mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

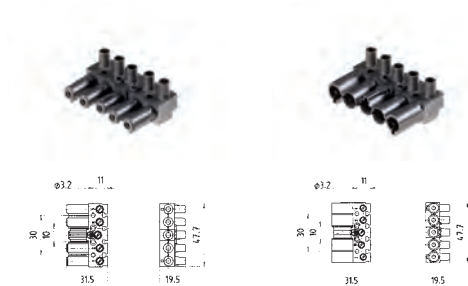

Single screw connection

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, N, PE, 2, 1	92.051.3253.1	92.052.3353.1
□ white	Mains 250/400 V	3, N, PE, 2, 1	92.051.3253.0	92.052.3353.0
■ pebble gray	UPS 250/400 V	1, 2, 3, N, PE	92.051.3453.0	92.052.3453.0
■ tomato red	UPS 250/400 V	1, 2, 3, N, PE	92.051.3453.5	92.052.3453.5
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	92.051.3753.0	92.052.3753.0
■ light blue	SELV	1, 2, 3, 4, 5	92.051.3153.0	92.052.3153.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3/N, 4	92.051.3553.0	92.052.3553.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4/N, 5	92.051.3953.0	92.052.3953.0


Snap-in, Spring force

Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	2

Lockable:	Yes
Cross section fine-stranded:	0,5 - 1,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

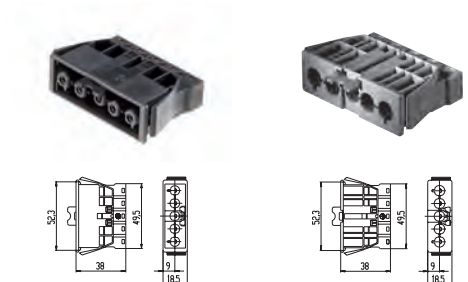

Housing material thickness 0.5-1.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, N, PE, 2, 1	92.051.9658.1	92.052.9658.1
□ white	Mains 250/400 V	3, N, PE, 2, 1	92.051.9658.0	92.052.9658.0
■ pebble gray	UPS 250/400 V	1, 2, 3, N, PE	92.051.9758.0	92.052.9758.0
■ tomato red	UPS 250/400 V	1, 2, 3, N, PE	92.051.9758.5	92.052.9758.5
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	92.051.8658.0	92.052.8658.0
■ light blue	SELV	1, 2, 3, 4, 5	92.051.8358.0	92.052.8358.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3/N, 4	92.051.8058.0	92.052.8058.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4/N, 5	92.051.8258.0	92.052.8258.0


Device connectors, 5-pole

Solder connector, Soldering connection


Rated voltage:	250V/ 400V
Rated current:	20 A
Degree of protection (IP):	IP20
Pollution degree:	2

Terminations per pole:	1
Lockable:	Yes
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female




male




horizontal, without fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, N, PE, 2, 1	92.053.0058.1	92.054.0058.1
□ white	Mains 250/400 V	3, N, PE, 2, 1	92.053.0058.0	92.054.0058.0
■ pastel blue	Mains 250 V + not SELV	D1, D2, L, PE, N	92.053.0458.0	92.054.0458.0
■ light blue	SELV	1, 2, 3, 4, 5	92.053.0258.0	

female



male



vertical, without fastening flange


Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, N, PE, 2, 1	92.051.0058.1	92.052.0058.1
□ white	Mains 250/400 V	3, N, PE, 2, 1	92.051.0058.0	92.052.0058.0
■ pastel blue	Mains 250 V + not SELV	D1, D2, L, PE, N	92.051.0458.0	92.052.0458.0
■ light blue	SELV	1, 2, 3, 4, 5	92.051.0258.0	

Distributors

Rated voltage: 250 / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV

Degree of protection (IP): IP20, inserted IP40
 Lockable: yes


H distributor

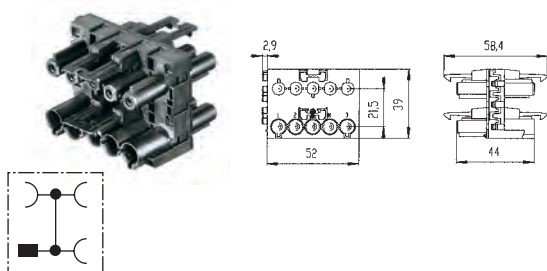

5-pole with option of mounting to 07.413.5453.0/1

Color of coding	Application	Outputs	Part No.
□ white	Mains 250/400 V	3	92.050.0353.0
■ black	Mains 250/400 V	3	92.050.0353.1
■ pastel blue	Mains 250 V + not SELV	3	92.050.1853.0

H distributor




5-pole with option of mounting to 07.413.6853.1

Color of coding	Application	Outputs	Part No.
□ white	Mains 250/400 V	3	92.050.6953.0
■ black	Mains 250/400 V	3	92.050.6953.1
■ light blue	Low voltage	3	92.050.7353.0
■ pastel blue	Mains 250 V + not SELV	3	92.050.7453.0
■ pebble gray	UPS 250/400 V	3	92.050.7053.0
■ tomato red	UPS 250/400 V	3	92.050.7053.5
■ turquoise	Acc. to customer requirements (without PE)	3	92.050.7153.0
■ may green	Acc. to customer requirements (with PE)	3	92.050.7253.0

Expected to be available from Q4 2017

Phase selection distributor

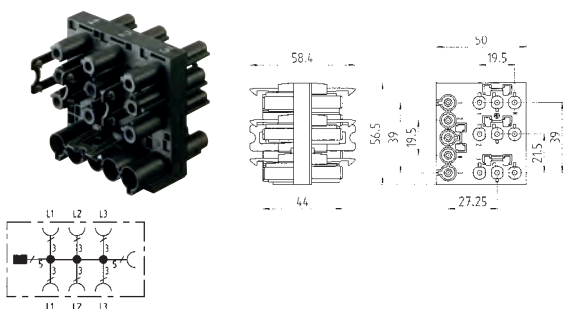

5-pole with phase selection with option of mounting to 07.413.6853.1


Color of coding	Application	Outputs	Part No.
□ white	Mains 250/400 V	7	92.050.0153.0
■ black	Mains 250/400 V	7	92.050.0153.1
■ pebble gray	UPS 250/400 V	7	92.050.2153.0
■ tomato red	UPS 250/400 V	7	92.050.2153.5

T distributor

Rated voltage: 250 / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV

Degree of protection (IP): IP20, inserted IP40
 Lockable: Yes
 Interlock for vertical output has to be ordered separately


T distributor

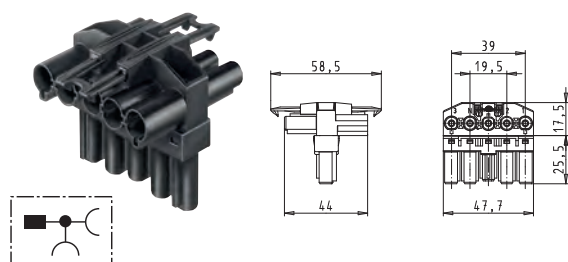

5-pole with interlock on both sides on feed-through level

Color of coding	Application	Outputs	Part No.
□ white	Mains 250/400 V	2	92.050.1053.0
■ black	Mains 250/400 V	2	92.050.1053.1
■ pastel blue	Mains 250 V + not SELV	2	92.050.1453.0


T distributor

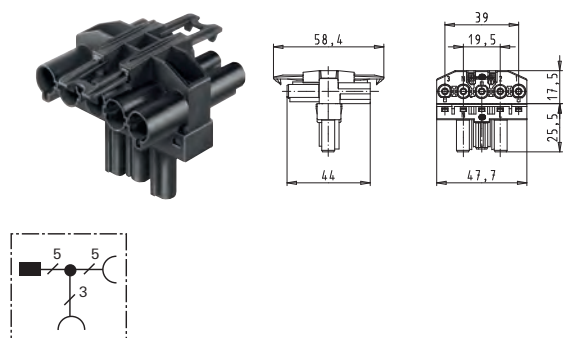

5-pole with phase selection with interlock on both sides on feed-through level

Color of coding	Application	Pole marking	Outputs	Part No.
□ white	Mains 250/400 V	L1	2	92.050.4153.0
■ black	Mains 250/400 V	L1	2	92.050.4153.1
□ white	Mains 250/400 V	L2	2	92.050.4253.0
■ black	Mains 250/400 V	L2	2	92.050.4253.1
□ white	Mains 250/400 V	L3	2	92.050.4353.0
■ black	Mains 250/400 V	L3	2	92.050.4353.1


T distributor

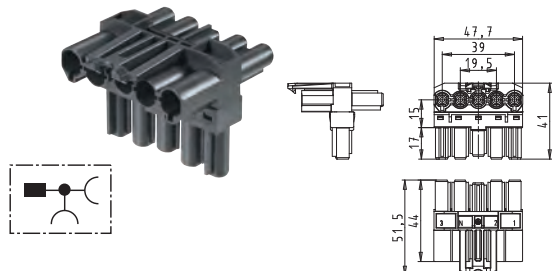

5-pole with interlock on one side on feed-through level, direct serial connection option

Color of coding	Application	Outputs	Part No.
■ black	Mains 250/400 V	2	99.470.5772.2

T distributor

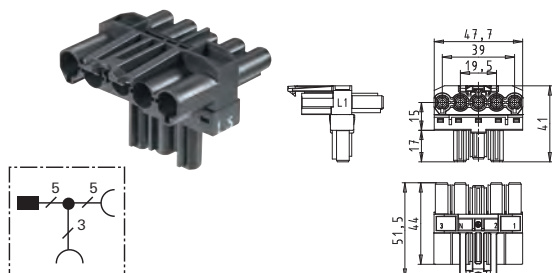


5-pole with phase selection with interlock on one side on feed-through level, direct serial connection option

Color of coding	Application	Pole marking	Outputs	Part No.
■ black	Mains 250/400 V	L1	2	99.420.5772.2
■ black	Mains 250/400 V	L2	2	99.421.5772.2
■ black	Mains 250/400 V	L3	2	99.422.5772.2

T distributor

Rated voltage:	250 / 400 V	Degree of protection (IP):	IP20, inserted IP40
Rated current:	20 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Interlock for vertical output has to be ordered separately	


T distributor

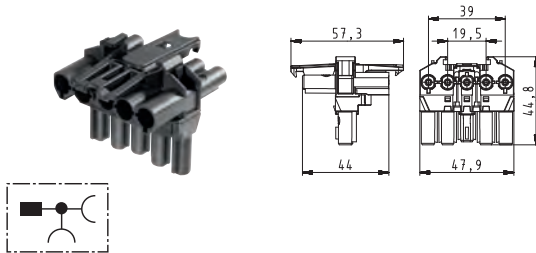

5-pole with option of mounting to 07.413.6853.1, cascable

Color of coding	Application	Outputs	Part No.
□ white	Mains 250/400 V	2	92.050.3053.0
■ black	Mains 250/400 V	2	92.050.3053.1
■ pebble gray	UPS 250/400 V	2	92.050.3553.0
■ tomato red	UPS 250/400 V	2	92.050.3553.5
■ pastel blue	Mains 250 V + not SELV	2	92.050.3453.0

T distributor

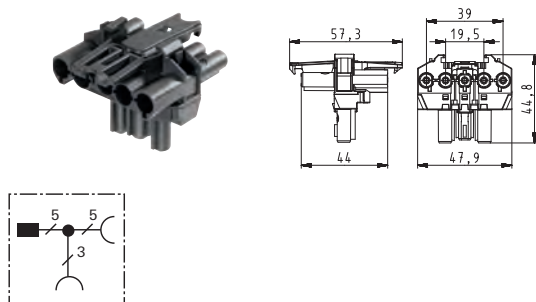

5-pole for phase selection with option of mounting to 07.413.6853.1, cascable

Color of coding	Application	Pole marking	Outputs	Part No.
□ white	Mains 250/400 V	L1	2	92.050.3153.0
■ black	Mains 250/400 V	L1	2	92.050.3153.1
■ pebble gray	UPS 250/400 V	L1	2	92.050.3653.0
■ tomato red	UPS 250/400 V	L1	2	92.050.3653.5
□ white	Mains 250/400 V	L2	2	92.050.3253.0
■ black	Mains 250/400 V	L2	2	92.050.3253.1
■ pebble gray	UPS 250/400 V	L2	2	92.050.3753.0
■ tomato red	UPS 250/400 V	L2	2	92.050.3753.5
□ white	Mains 250/400 V	L3	2	92.050.3353.0
■ black	Mains 250/400 V	L3	2	92.050.3353.1
■ pebble gray	UPS 250/400 V	L3	2	92.050.3853.0
■ tomato red	UPS 250/400 V	L3	2	92.050.3853.5

Cable assemblies, 5-pole

0.75 mm², 6 A			
Rated voltage:	250V/ 400V	Lockable:	Yes
Rated current:	6 A	Preparation of conductor ends:	Ultrasonically compressed wire ends
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

Connection cable, male - free end


H05Z1Z1-F

halogen free

Length (m)

Part No.

Cable color:	☐ white	1	92.255.1064.2
Color of coding:	☐ white	2	92.255.2064.2
Marking of poles:	1, 2, 3, N, PE	3	92.255.3064.2
Application:	Mains 250/400 V	4	92.255.4064.2
		5	92.255.5064.2
		6	92.255.6064.2
		7	92.255.7064.2
		8	92.255.8064.2

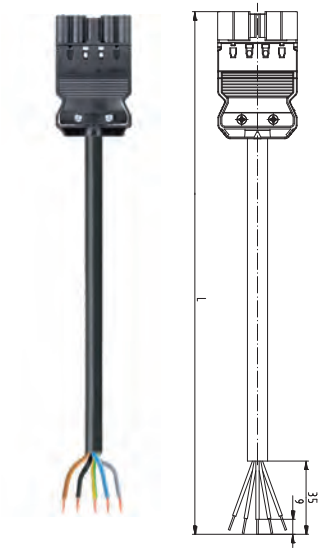

Cable assemblies, 5-pole

1 mm², 10 A			
Rated voltage:	250V/ 400V	Lockable:	Yes
Rated current:	10 A	Preparation of conductor ends:	Ultrasonically compressed wire ends
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

Connection cable, male - free end


H05Z1Z1-F

halogen free

Length (m)

Part No.

Cable color:	☐ white	1	92.256.1064.2
Color of coding:	☐ white	2	92.256.2064.2
Marking of poles:	1, 2, 3, N, PE	3	92.256.3064.2
Application:	Mains 250/400 V	4	92.256.4064.2
		5	92.256.5064.2
		6	92.256.6064.2
		7	92.256.7064.2
		8	92.256.8064.2

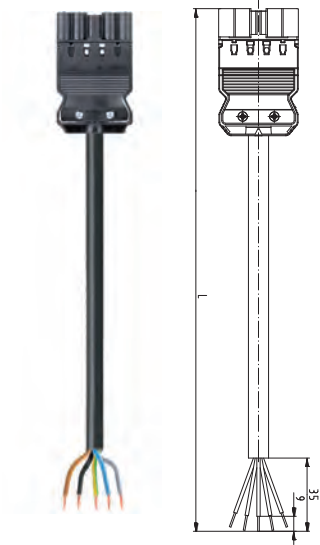

Cable assemblies, 5-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

Connecting cable, female - male

H05VV-F

halogenated
 Part No.

H05V2V2-F

halogenated
 Part No.

H05Z1Z1-F

halogen free
 Part No.

Length (m)

Cable color:	■ black	1	■ black	■ black	■ black
Color of coding:	■ black	2	92.257.1000.1	92.257.2010.1	92.257.1060.1
Marking of poles:	3, N, PE, 2, 1	3	92.257.2000.1	92.257.3010.1	92.257.2060.1
Application:	Mains 250/400 V	4	92.257.3000.1	92.257.4010.1	92.257.3060.1
		5	92.257.4000.1	92.257.5010.1	92.257.4060.1
		6	92.257.5000.1		92.257.5060.1
		7	92.257.6000.1		92.257.6060.1
		8	92.257.7000.1		92.257.7060.1
			92.257.8000.1		92.257.8060.1

Cable color:	□ white	1	□ white	□ white	□ white
Color of coding:	□ white	2	92.257.1000.2	92.257.2000.2	92.257.1060.2
Marking of poles:	3, N, PE, 2, 1	3	92.257.2000.2		92.257.2060.2
Application:	Mains 250/400 V	4	92.257.3000.2		92.257.3060.2
		5	92.257.4000.2		92.257.4060.2
		6	92.257.5000.2		92.257.5060.2
		7	92.257.6000.2		92.257.6060.2
		8	92.257.7000.2		92.257.7060.2
			92.257.8000.2		92.257.8060.2

Cable color:	■ black	1	■ black	■ black	■ black
Color of coding:	■ black	2	92.257.1000.0	92.257.2000.0	92.257.1060.0
Marking of poles:	3, N, PE, 2, 1	3	92.257.2000.0		92.257.2060.0
Application:	UPS 250/400 V	4	92.257.3000.0		92.257.3060.0
		5	92.257.4000.0		92.257.4060.0
		6	92.257.5000.0		92.257.5060.0
		7	92.257.6000.0		92.257.6060.0
		8	92.257.7000.0		92.257.7060.0
			92.257.8000.0		92.257.8060.0

Cable color:	■ black	1	■ black	■ black	■ black
Color of coding:	■ black	2	92.257.1000.9	92.257.2000.9	92.257.1060.9
Marking of poles:	■ pastel blue	3	92.257.2000.9		92.257.2060.9
Application:	L, N, PE, D2, D1	4	92.257.3000.9		92.257.3060.9
	Mains 250 V + not SELV	5	92.257.4000.9		92.257.4060.9
		6	92.257.5000.9		92.257.5060.9
		7	92.257.6000.9		92.257.6060.9
		8	92.257.7000.9		92.257.7060.9
			92.257.8000.9		92.257.8060.9

Cable color:	■ black	1	■ black		
Color of coding:	■ black	2	92.257.1000.7		
Marking of poles:	■ may green	3	92.257.2000.7		
Application:	1, 2, PE, 3/N, 4	4	92.257.3000.7		
	Acc. to customer requirements (with PE)	5	92.257.4000.7		
		6	92.257.5000.7		
		7	92.257.6000.7		
		8	92.257.7000.7		
			92.257.8000.7		

Cable color:	■ black	1		■ black	
Color of coding:	■ black	2		92.257.1060.8	
Marking of poles:	■ turquoise	3		92.257.2060.8	
Application:	1, 2, 3, 4/N, 5	4		92.257.3060.8	
	Acc. to customer requirements (without PE)	5		92.257.4060.8	
		6		92.257.5060.8	
		7		92.257.6060.8	
		8		92.257.7060.8	
				92.257.8060.8	

Cable assemblies, 5-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

Connection cable, female - free end

H05VV-F

halogenated

H05Z1Z1-F

halogen free

Length (m)

Part No.

Part No.

Cable color: ■ black Color of coding: ■ black Marking of poles: 3, N, PE, 2, 1 Application: Mains 250/400 V	1	92.257.1003.1	92.257.1063.1
	2	92.257.2003.1	92.257.2063.1
	3	92.257.3003.1	92.257.3063.1
	4	92.257.4003.1	92.257.4063.1
	5	92.257.5003.1	92.257.5063.1
	6	92.257.6003.1	92.257.6063.1
	7	92.257.7003.1	92.257.7063.1
	8	92.257.8003.1	92.257.8063.1
Cable color: □ white Color of coding: □ white Marking of poles: 3, N, PE, 2, 1 Application: Mains 250/400 V	1	92.257.1003.2	92.257.1063.2
	2	92.257.2003.2	92.257.2063.2
	3	92.257.3003.2	92.257.3063.2
	4	92.257.4003.2	92.257.4063.2
	5	92.257.5003.2	92.257.5063.2
	6	92.257.6003.2	92.257.6063.2
	7	92.257.7003.2	92.257.7063.2
	8	92.257.8003.2	92.257.8063.2
Cable color: ■ black Color of coding: ■ black Marking of poles: 3, N, PE, 2, 1 Application: UPS 250/400 V	1	92.257.1003.0	92.257.1063.0
	2	92.257.2003.0	92.257.2063.0
	3	92.257.3003.0	92.257.3063.0
	4	92.257.4003.0	92.257.4063.0
	5	92.257.5003.0	92.257.5063.0
	6	92.257.6003.0	92.257.6063.0
	7	92.257.7003.0	92.257.7063.0
	8	92.257.8003.0	92.257.8063.0
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE, D2, D1 Application: Mains 250 V + not SELV	1	92.257.1003.9	92.257.1063.9
	2	92.257.2003.9	92.257.2063.9
	3	92.257.3003.9	92.257.3063.9
	4	92.257.4003.9	92.257.4063.9
	5	92.257.5003.9	92.257.5063.9
	6	92.257.6003.9	92.257.6063.9
	7	92.257.7003.9	92.257.7063.9
	8	92.257.8003.9	92.257.8063.9
Cable color: ■ black Color of coding: ■ black Marking of poles: 1, 2, PE, 3/N, 4 Application: Acc. to customer requirements (with PE)	1	92.257.1003.7	92.257.1063.7
	2	92.257.2003.7	92.257.2063.7
	3	92.257.3003.7	92.257.3063.7
	4	92.257.4003.7	92.257.4063.7
	5	92.257.5003.7	92.257.5063.7
	6	92.257.6003.7	92.257.6063.7
	7	92.257.7003.7	92.257.7063.7
	8	92.257.8003.7	92.257.8063.7
Cable color: ■ black Color of coding: ■ black Marking of poles: 1, 2, 3, 4/N, 5 Application: Acc. to customer requirements (without PE)	1	92.257.1063.8	92.257.1063.8
	2	92.257.2063.8	92.257.2063.8
	3	92.257.3063.8	92.257.3063.8
	4	92.257.4063.8	92.257.4063.8
	5	92.257.5063.8	92.257.5063.8
	6	92.257.6063.8	92.257.6063.8
	7	92.257.7063.8	92.257.7063.8
	8	92.257.8063.8	92.257.8063.8

Cable assemblies, 5-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

Connection cable, male - free end

	H05VV-F halogenated	H05V2V2-F halogenated	H05Z1Z1-F halogen free
Length (m)	Part No.	Part No.	Part No.

Cable color:	■ black	■ black	■ black
Color of coding:	■ black		
Marking of poles:	3, N, PE, 2, 1		
Application:	Mains 250/400 V		
	1	92.257.1004.1	92.257.1064.1
	2	92.257.2004.1	92.257.2064.1
	3	92.257.3004.1	92.257.3064.1
	4	92.257.4004.1	92.257.4064.1
	5	92.257.5004.1	92.257.5064.1
	6	92.257.6004.1	92.257.6064.1
	7	92.257.7004.1	92.257.7064.1
	8	92.257.8004.1	92.257.8064.1

Cable color:	□ white	□ white	□ white
Color of coding:	□ white		
Marking of poles:	3, N, PE, 2, 1		
Application:	Mains 250/400 V		
	1	92.257.1004.2	92.257.1064.2
	2	92.257.2004.2	92.257.2064.2
	3	92.257.3004.2	92.257.3064.2
	4	92.257.4004.2	92.257.4064.2
	5	92.257.5004.2	92.257.5064.2
	6	92.257.6004.2	92.257.6064.2
	7	92.257.7004.2	92.257.7064.2
	8	92.257.8004.2	92.257.8064.2

Cable color:	■ black	■ black	■ black
Color of coding:	■ black		
Marking of poles:	3, N, PE, 2, 1		
Application:	UPS 250/400 V		
	1	92.257.1004.0	92.257.1064.0
	2	92.257.2004.0	92.257.2064.0
	3	92.257.3004.0	92.257.3064.0
	4	92.257.4004.0	92.257.4064.0
	5	92.257.5004.0	92.257.5064.0
	6	92.257.6004.0	92.257.6064.0
	7	92.257.7004.0	92.257.7064.0
	8	92.257.8004.0	92.257.8064.0

Cable color:	■ black	■ black	■ black
Color of coding:	■ black		
Marking of poles:	L, N, PE, D2, D1		
Application:	Mains 250 V + not SELV		
	1	92.257.1004.9	92.257.1064.9
	2	92.257.2004.9	92.257.2064.9
	3	92.257.3004.9	92.257.3064.9
	4	92.257.4004.9	92.257.4064.9
	5	92.257.5004.9	92.257.5064.9
	6	92.257.6004.9	92.257.6064.9
	7	92.257.7004.9	92.257.7064.9
	8	92.257.8004.9	92.257.8064.9

Cable color:	■ black	■ black	■ black
Color of coding:	■ black		
Marking of poles:	1, 2, PE, 3/N, 4		
Application:	Acc. to customer requirements (with PE)		
	1	92.257.1004.7	92.257.1064.7
	2	92.257.2004.7	92.257.2064.7
	3	92.257.3004.7	92.257.3064.7
	4	92.257.4004.7	92.257.4064.7
	5	92.257.5004.7	92.257.5064.7
	6	92.257.6004.7	92.257.6064.7
	7	92.257.7004.7	92.257.7064.7
	8	92.257.8004.7	92.257.8064.7

Cable color:	■ black	■ black	■ black
Color of coding:	■ black		
Marking of poles:	1, 2, 3, 4/N, 5		
Application:	Acc. to customer requirements (without PE)		
	1		92.257.1064.8
	2		92.257.2064.8
	3		92.257.3064.8
	4		92.257.4064.8
	5		92.257.5064.8
	6		92.257.6064.8
	7		92.257.7064.8
	8		92.257.8064.8

Cable assemblies, 5-pole

2.5 mm², 20 A

Rated voltage: 250V/ 400V
 Rated current: 20 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

Connecting cable, female - male

H05VV-F

halogenated
 Part No.

H05Z1Z1-F

halogen free
 Part No.


Length (m)

Cable color:	■ black	1	■ black	■ black
Color of coding:	■ black	2	92.258.1000.1	92.258.1060.1
Marking of poles:	3, N, PE, 2, 1	3	92.258.2000.1	92.258.2060.1
Application:	Mains 250/400 V	4	92.258.3000.1	92.258.3060.1
		5	92.258.4000.1	92.258.4060.1
		6	92.258.5000.1	92.258.5060.1
		7	92.258.6000.1	92.258.6060.1
		8	92.258.7000.1	92.258.7060.1
			92.258.8000.1	92.258.8060.1

Cable color:	□ white	1	□ white	□ white
Color of coding:	□ white	2	92.258.1000.2	92.258.1060.2
Marking of poles:	3, N, PE, 2, 1	3	92.258.2000.2	92.258.2060.2
Application:	Mains 250/400 V	4	92.258.3000.2	92.258.3060.2
		5	92.258.4000.2	92.258.4060.2
		6	92.258.5000.2	92.258.5060.2
		7	92.258.6000.2	92.258.6060.2
		8	92.258.7000.2	92.258.7060.2
			92.258.8000.2	92.258.8060.2

Cable color:	■ black	2	■ black	■ black
Color of coding:	■ black	3	92.258.1000.3	92.258.1060.3
Marking of poles:	3, N, PE, 2, 1	4	92.258.2000.3	92.258.2060.3
Application:	UPS 250/400 V	6	92.258.4000.3	92.258.4060.3
		8	92.258.6000.3	92.258.6060.3
			92.258.8000.3	92.258.8060.3

Cable color:	■ black	1	■ black	■ black
Color of coding:	■ black	2	92.258.1000.9	92.258.1060.9
Marking of poles:	■ black	3	92.258.2000.9	92.258.2060.9
Application:	■ black	4	92.258.3000.9	92.258.3060.9
	■ black	5	92.258.4000.9	92.258.4060.9
	■ black	6	92.258.5000.9	92.258.5060.9
	■ black	7	92.258.6000.9	92.258.6060.9
	■ black	8	92.258.7000.9	92.258.7060.9
	■ black		92.258.8000.9	92.258.8060.9

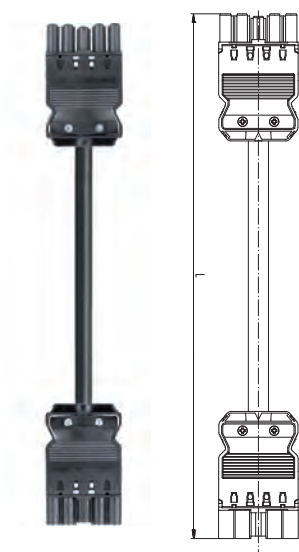

Cable assemblies, 5-pole

2.5 mm², 20 A

Rated voltage: 250V/ 400V
 Rated current: 20 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

Connection cable, female - free end

H05VV-F

halogenated

H05Z1Z1-F

halogen free

Length (m)

Part No.

Part No.

Cable color:	■ black	1	92.258.1003.1	92.258.1063.1
Color of coding:	■ black	2	92.258.2003.1	92.258.2063.1
Marking of poles:	3, N, PE, 2, 1	3	92.258.3003.1	92.258.3063.1
Application:	Mains 250/400 V	4	92.258.4003.1	92.258.4063.1
		5	92.258.5003.1	92.258.5063.1
		6	92.258.6003.1	92.258.6063.1
		7	92.258.7003.1	92.258.7063.1
		8	92.258.8003.1	92.258.8063.1

Cable color:	□ white	1	92.258.1003.2	92.258.1063.2
Color of coding:	□ white	2	92.258.2003.2	92.258.2063.2
Marking of poles:	3, N, PE, 2, 1	3	92.258.3003.2	92.258.3063.2
Application:	Mains 250/400 V	4	92.258.4003.2	92.258.4063.2
		5	92.258.5003.2	92.258.5063.2
		6	92.258.6003.2	92.258.6063.2
		7	92.258.7003.2	92.258.7063.2
		8	92.258.8003.2	92.258.8063.2

Cable color:	■ black	1	92.258.1003.9	92.258.1063.9
Color of coding:	■ black	2	92.258.2003.9	92.258.2063.9
Marking of poles:	■ black	3	92.258.3003.9	92.258.3063.9
Application:	■ black	4	92.258.4003.9	92.258.4063.9
		5	92.258.5003.9	92.258.5063.9
		6	92.258.6003.9	92.258.6063.9
		7	92.258.7003.9	92.258.7063.9
		8	92.258.8003.9	92.258.8063.9

Connection cable, male - free end

H05VV-F

halogenated

H05Z1Z1-F

halogen free

Length (m)

Part No.

Part No.

Cable color:	■ black	1	92.258.1004.1	92.258.1064.1
Color of coding:	■ black	2	92.258.2004.1	92.258.2064.1
Marking of poles:	3, N, PE, 2, 1	3	92.258.3004.1	92.258.3064.1
Application:	Mains 250/400 V	4	92.258.4004.1	92.258.4064.1
		5	92.258.5004.1	92.258.5064.1
		6	92.258.6004.1	92.258.6064.1
		7	92.258.7004.1	92.258.7064.1
		8	92.258.8004.1	92.258.8064.1

Cable color:	□ white	1	92.258.1004.2	92.258.1064.2
Color of coding:	□ white	2	92.258.2004.2	92.258.2064.2
Marking of poles:	3, N, PE, 2, 1	3	92.258.3004.2	92.258.3064.2
Application:	Mains 250/400 V	4	92.258.4004.2	92.258.4064.2
		5	92.258.5004.2	92.258.5064.2
		6	92.258.6004.2	92.258.6064.2
		7	92.258.7004.2	92.258.7064.2
		8	92.258.8004.2	92.258.8064.2

Cable color:	■ black	1	92.258.1004.9	92.258.1064.9
Color of coding:	■ black	2	92.258.2004.9	92.258.2064.9
Marking of poles:	■ black	3	92.258.3004.9	92.258.3064.9
Application:	■ black	4	92.258.4004.9	92.258.4064.9
		5	92.258.5004.9	92.258.5064.9
		6	92.258.6004.9	92.258.6064.9
		7	92.258.7004.9	92.258.7064.9
		8	92.258.8004.9	92.258.8064.9


Connector, 6-pole

Screw connection

Rated voltage:	250V	Cross section fine-stranded:	0,75 - 4mm ²
Rated current:	20 A	Cross section solid:	0,75 - 4mm ²
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2	Housing material:	Polyamide
Terminations per pole:	1	for insulation and sheath strip lengths please see technical data	
Lockable:	Yes		

female

male

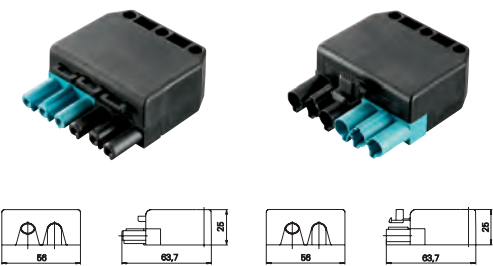


For cables Ø 10 - 12 mm

			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ pastel blue/ black	Mains 250 V + dimming + emergency	3, 2, 1, N, PE, L	92.969.0158.1	92.968.0158.1

female

male

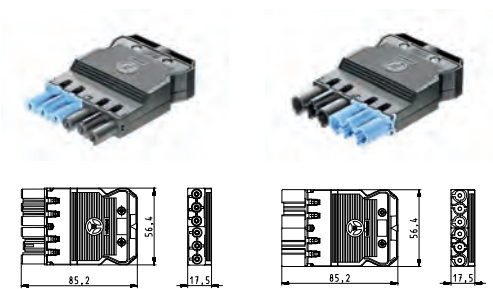

For cables Ø 11 - 15.5 mm


			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ pastel blue/ black	Mains 250 V + dimming + emergency	3, 2, 1, N, PE, L	92.969.0358.1	92.968.0358.1

Device connectors, 6-pole

Snap-in, Spring force			
Rated voltage:	250V	Lockable:	Yes
Rated current:	20 A	Cross section fine-stranded:	0,5 - 1,5mm²
Degree of protection (IP):	IP20	Cross section solid:	0,5 - 2,5mm²
Pollution degree:	2	Rated impulse voltage:	4 kV
Terminations per pole:	2	Housing material:	Polyamide

female

male

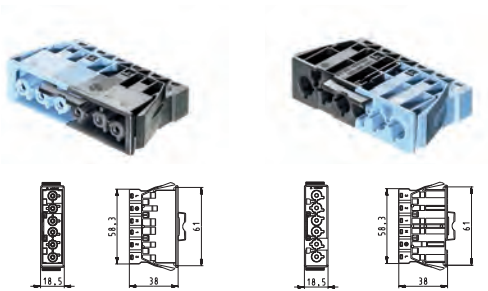


Housing material thickness 0.5-2.5 mm			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ pastel blue/ black	Mains 250 V + dimming + emergency	3, 2, 1, N, PE, L	92.061.8658.1	92.062.8658.1

T distributor

Rated voltage:	250 V / 400 V	Degree of protection (IP):	IP20
Rated current:	20 A		

T distributor

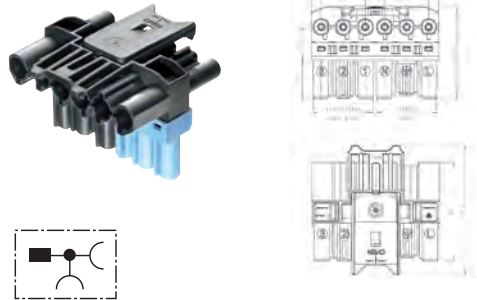

6 pole, cascadable

Color of coding	Application	Outputs	Part No.
■ pastel blue/ black	Mains 250 V + dimming + emergency	2	92.060.3053.1

Cable assemblies, 6-pole


1.5 mm², 16 A

Rated voltage:	250V	Pollution degree:	2
Rated current:	16 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV

Connecting cable, female - male

S05HH-F
halogen free

Length (m)	Part No.
------------	----------

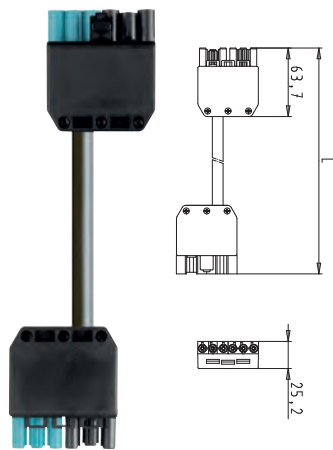

Cable colour:	■ pastel blue/black	■ black
Color of coding:	3, 2, 1, N, PE, L	
Marking of poles:		
Application:	Mains 250 V + dimming + emergency	
	1	99.411.0028.0
	2	99.412.0028.0
	3	99.413.0028.0
	4	99.414.0028.0
	5	99.415.0028.0
	6	99.416.0028.0
	7	99.417.0028.0
	8	99.418.0028.0

Cable assemblies, 6-pole

1.5 mm², 16 A


Rated voltage:	250V	Lockable:	Yes
Rated current:	16 A	Preparation of conductor ends:	Cable end sleeve
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

Connection cable, female - free end

S05HH-F
halogen free

Length (m) Part No.

Cable colour:	■ pastel blue/black	1	99.431.0028.0
Color of coding:	■ pastel blue/black	2	99.432.0028.0
Marking of poles:	3, 2, 1, N, PE, L	3	99.433.0028.0
Application:	Mains 250 V + dimming + emergency	4	99.434.0028.0
		5	99.435.0028.0
		6	99.436.0028.0
		7	99.437.0028.0
		8	99.438.0028.0

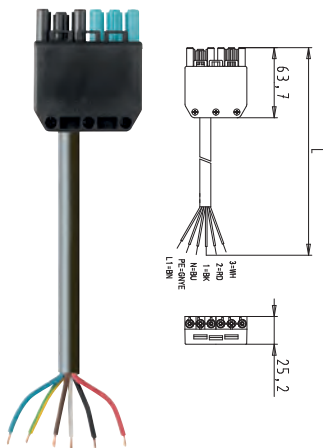


Connection cable, male - free end


S05HH-F
Halogen free

Length (m) Part No.

Cable colour:	■ pastel blue/black	1	99.451.0028.0
Color of coding:	■ pastel blue/black	2	99.452.0028.0
Marking of poles:	3, 2, 1, N, PE, L	3	99.453.0028.0
Application:	Mains 250 V + dimming + emergency	4	99.454.0028.0
		5	99.455.0028.0
		6	99.456.0028.0
		7	99.457.0028.0
		8	99.458.0028.0

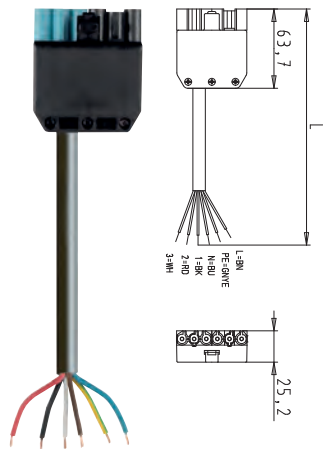


Mounting material




Supporting plate for 5-pole, 5/3-pole distribution block, for screw attachment

Color	Application	Part No.
□ white		07.413.5453.0
■ black		07.413.5453.1



Supporting plate for distribution blocks, for snap-in into mounting sheet



Color	Application	Part No.
□ white		07.413.5553.0
■ black		07.413.5553.1



Mounting sheet for distribution blocks


Color	Application	Part No.
metal		05.562.3612.0

Mounting plate



GST18 distributor mounting plate for switching distributors

Color	Application	Part No.
■ black		07.413.6853.1



Carrier for cable assembly GST18i3



Color	Application	Part No.
■ black	flying connection	Z5.566.5750.0

Accessories

for female connectors

for male connectors

Cover, 3-pole for covering open contacts



Color	Application
□ white	
■ black	


for female connectors	for male connectors
Part No.	Part No.
05.561.3653.0	05.594.4250.0
05.561.3653.1	05.594.4253.0

for female connectors

Cover, 4-pole for covering open contacts

for female connectors
Part No.
05.566.9153.0

Color	Application
■ black	





for female connectors

for male connectors

Cover, 5-pole for covering open contacts

for female connectors	for male connectors
Part No.	Part No.
05.566.9253.0	05.583.1853.0

Color	Application
■ black	




for female connectors


Cover, 3/4/5/6-pole for covering open contacts, 12 units

for female connectors
Part No.
05.564.5353.2
05.564.5353.0

Color	Application
□ white	
■ black	



Accessories

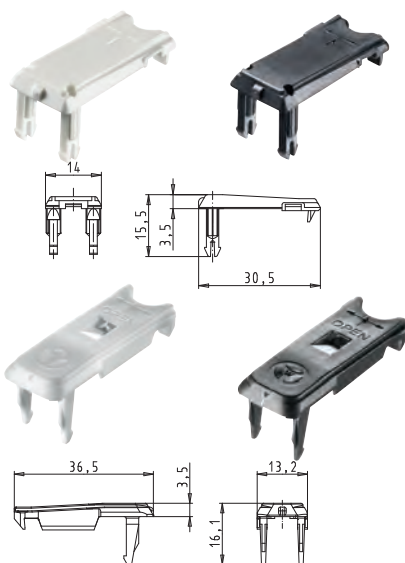


Locking devices for solder parts

Color	Application	Part No.
□ white		05.590.4556.0
■ black		05.590.4556.1

Locking device for flying leads

Color	Application	Part No.
□ white		05.587.3156.0
■ black		05.587.3156.1

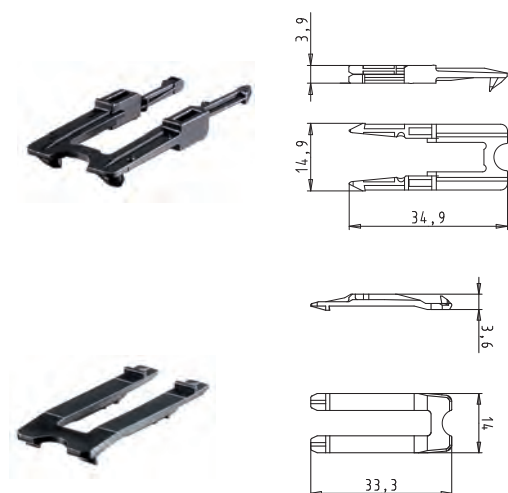


Slide lock, 3/4/5-pole as spare part for distribution units

Color	Application	Part No.
□ white		05.588.5753.0
■ black		05.588.5753.1


Slide lock, 3/4/5-pole as spare part for snap-in

Color	Application	Part No.
□ white		05.595.1453.2
■ black		05.595.1453.0

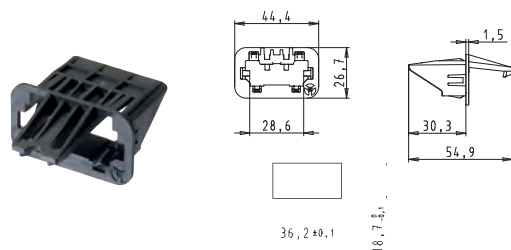

Snap-in frame for GST18i3 connectors and cables

Color	Application	Part No.
■ black		06.561.7853.0

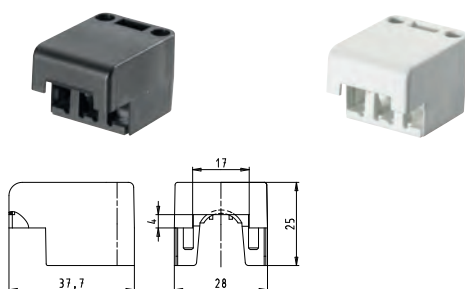


Strain relief, 3-pole, for device connectors with screw connection

Color of coding	Housing	Part No.
□ white	white	99.004.8210.0
■ black	black	99.005.8210.0

Accessories


Rated voltage:	250 V
Rated current:	16 A
Degree of protection (IP):	IP20, IP40 when plugged
Lockable:	yes

Routing:	GST18i3 Buchse
Incoming supply:	GST18i3 Stecker
Observe installation instructions, observe technical notes, see instructions and technical Data in the catalog!	



Pluggable outlet strips, 3-pole, 2 sockets

Color	Application	Pole marking	Part No.
□ white		L, PE, N	99.612.0028.0
■ black		L, PE, N	99.600.0028.0



Pluggable outlet strips, 3-pole, 3 sockets, without contact protection

Color	Application	Pole marking	Part No.
□ white		L, PE, N	99.602.0028.0
■ black		L, PE, N	99.601.0028.0

Pluggable outlet strips, 3-pole, 3 sockets with contact protection

Color	Application	Pole marking	Part No.
□ white		L, PE, N	99.653.0028.0
■ black		L, PE, N	99.652.0028.0



Overvoltage protection plug, 3-pole

Color	Application	Fault display	Part No.
■ gray		Optical	84.990.1242.0


Color	Application	Fault display	Part No.
■ gray		Acoustical	84.990.1243.0



Distribution boxes, covers


Rated voltage:	230 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged

Internal wiring: 2.5 mm² halogen-free



Distribution box, 3-pole, 1I/30 with locking device, white



Color of coding	Application	Pole marking	Part No.
■ pebble gray		L, PE, N	99.500.0028.0
■ salmon pink		L, PE, N	99.501.0028.0
Other codings and wirings on request			



4-pole, 1I/30 with locking device, white


Color of coding	Application	Pole marking	Part No.
■ black		2, N, PE, 1	99.502.0028.0
Other codings and wirings on request			

Distribution unit GST18, left empty for device connections, max. 7 poles per side



Color	Part No.
white	99.508.0028.0
Distribution box is available pre-assembled as per customer specifications	


Covers for covering open housing cutouts GST18



Color		Part No.
white	GST18i3	07.425.8753.0
white	GST18i4	07.425.8853.0
white	GST18i5	07.425.8953.0


Distribution boxes

Rated voltage:	250 V or 250 / 400 V	internal wiring:	2.5 mm ² halogen-free
Rated current:	20 A		
Rated impulse voltage:	4 kV	Examples for customized fitting and wiring:	
Degree of protection (IP):	IP20, IP40 when plugged		




Blackbox, 3-pole, input GST18i3 black, output 5x GST18i3 black

Color of coding	Application	Pole marking	Part No.
■ black			99.234.0028.0




Blackbox, 3-pole, input GST18i3 black, output 7x GST18i3 black

Color of coding	Application	Pole marking	Part No.
■ black			99.238.0028.0



Blackbox, 3-pole, input GST18i3 black, output 6x GST18i3 black

Color of coding	Application	Pole marking	Part No.
■ black			99.293.0028.0




Blackbox, 3-pole, input GST18i3 black, output 4x GST18i3 black

Color of coding	Application	Pole marking	Part No.
■ black			99.297.0028.0


Distribution boxes

Rated voltage:	250 V or 250 / 400 V	internal wiring:	2.5 mm ² halogen-free
Rated current:	20 A		
Rated impulse voltage:	4 kV	Examples for customized fitting and wiring:	
Degree of protection (IP):	IP20, IP40 when plugged		

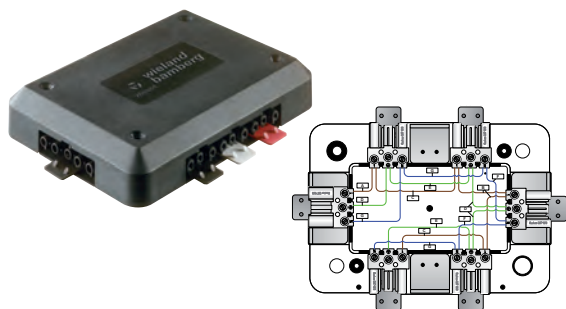


**Blackbox, 3-pole,
input GST18i3 white, output 5x GST18i3 white**

Color of coding	Application	Pole marking	Part No.
■ black			99.188.0028.0

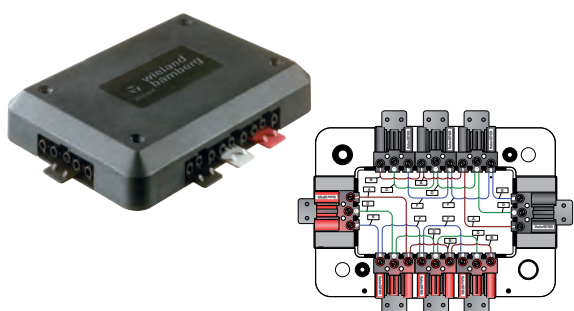


**Blackbox, 3-pole,
input GST18i3 red/black, output 3x GST18i3 black/red**

Color of coding	Application	Pole marking	Part No.
■ black / salmon pink			99.202.0028.0

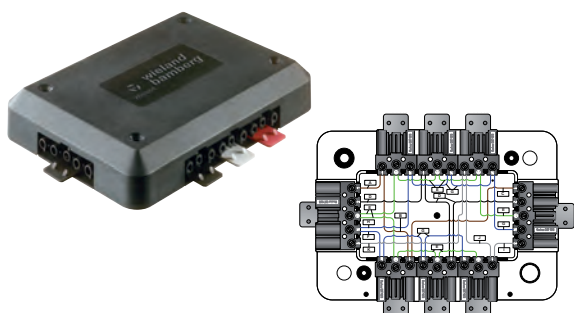

**Blackbox, 5-/3-pole,
input GST18i5 black, output 6x GST18i3 black, 1x GST18i5 black**

Color of coding	Application	Pole marking	Part No.
■ black			99.237.0028.0

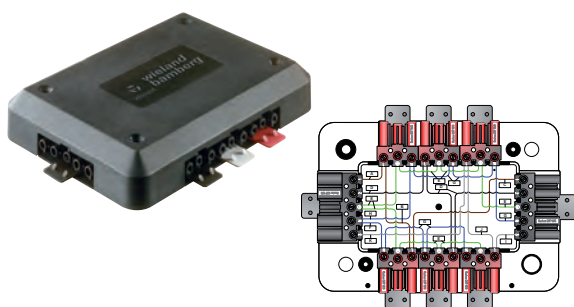


**Blackbox, 5-/3-pole,
input GST18i5 black, output 6x GST18i3 red, 1x GST18i5 black**

Color of coding	Application	Pole marking	Part No.
■ black / salmon pink			99.281.0028.0


Distribution boxes

Rated voltage:	250 V or 250 / 400 V	internal wiring:	2.5 mm ² halogen-free
Rated current:	20 A		
Rated impulse voltage:	4 kV	Examples for customized fitting and wiring:	
Degree of protection (IP):	IP20, IP40 when plugged		

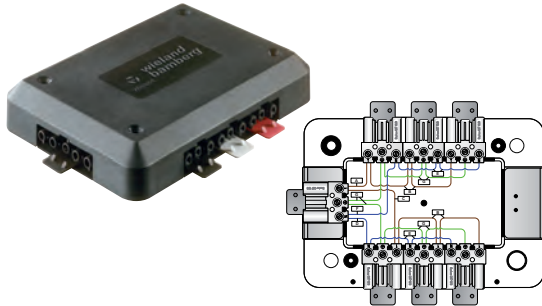

Blackbox, 3-pole, input GST18i3 white, output 6x GST18i3 white

Color of coding	Application	Pole marking	Part No.
■ black			99.294.0028.0

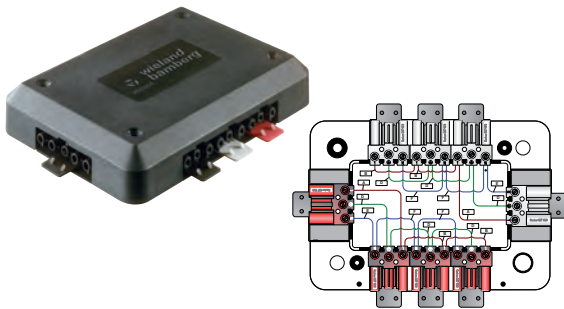


Blackbox, 3-pole, input GST18i3 red/white, output 3x GST18i3 red/white

Color of coding	Application	Pole marking	Part No.
■ ■ black / salmon pink			99.308.0028.0

gesis® TOP Luminaire connection adapter

Rated voltage:	250 V	Degree of protection (IP):	IP20, IP40 when plugged
Rated current:	20 A, 2.5 A, output current to the luminaire	Approval:	
Rated impulse voltage:	4 kV	Distribution type:	direct connection to luminaire
		Mounting option:	yes


Adapter for power supply



3-pole, adapter, lamp terminal separate

Color of coding	Application	Part No.
☐ white	L, PE, N	92.030.2153.0
☐ white, company BJB	L, PE, N	46.413.1302.50

Adapter for power supply



3-pole, TT-adapter, lamp terminal built-in

Color of coding	Application	Part No.
☐ white	L,N,PE,D1,D2	92.020.2053.0

Sample kit



gesis TOP Sample kit


Kit	Part No.
gesis TOP sample kit	99.600.0000.0

gesis® LINECT Luminaire connection adapter

Rated voltage:	250 V
Rated current:	20 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged

Distribution unit:	1 output for connecting terminal to luminaire with a LINECT interface
Approval:	
Distribution type:	direct connection to luminaire
Mounting option:	yes



LINECT distributor



3-pole, adapter for power supply

Color of coding	Application	Outputs	Part No.
☐ white	Main 250 V	2	92.030.2253.0

LINECT distributor



5-pole, adapter for power supply and dimming

Color of coding	Application	Outputs	Part No.
☐ white, pastel blue	Main 250 V + not SELV	2	92.050.2453.0

Connectors, no flame

Screw connection

Glow wire resistant „No-Flame“ material

Wire cross-section
solid/fine-stranded: 0.75 – 2.5 mm²

Rated voltage: 250 V

Rated current: 20 A

Rated impulse voltage: 4 kV


Degree of protection (IP): IP20, IP40 when plugged

Connections per pole: 1, without ferrules

Especially for applications requiring fire hazard tests
as per the standard EN 60335-1, observe Technical data.

female

male

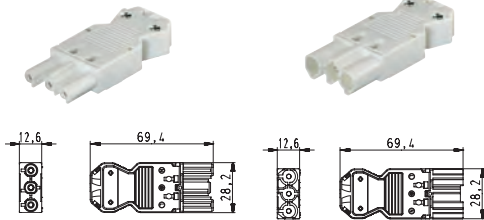


3-pole, for cable Ø 6.5 – 10.5 mm, unassembled

Color of coding	Application	Pole marking	female	male
			Part No.	Part No.
□ white		N, PE, L	92.931.3057.0	92.932.3057.0

female

male

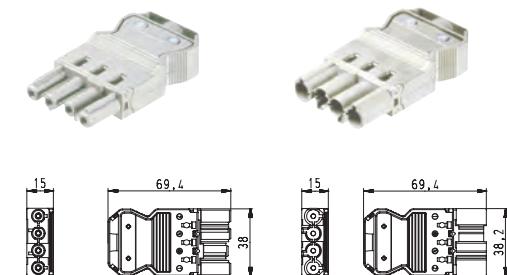


4-pole, for cable Ø 7.1 – 12.0 mm, unassembled

Color of coding	Application	Pole marking	female	male
			Part No.	Part No.
□ white		2, N, PE, 1	92.943.3057.0	92.944.3057.0

female

male

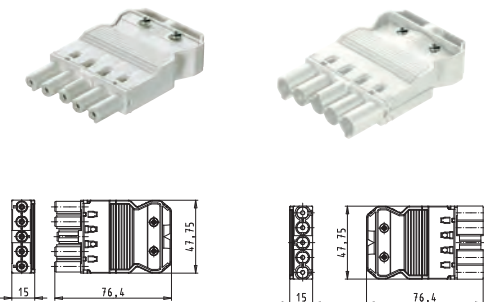

5-pole, for cable Ø 8.5 – 12.5 mm, unassembled

Color of coding	Application	Pole marking	female	male
			Part No.	Part No.
□ white		3, N, PE, 2, 1	92.953.4057.0	92.954.4057.0

Device connector No Flame

Snap-in / solder part

Glow wire resistant „No-Flame“ material

Wire cross-section
solid/fine-stranded: 0.75 – 2.5 mm²

Rated voltage: 250 V

Rated current: 20 A



Rated impulse voltage: 4 kV

Degree of protection (IP): IP20, IP40 when plugged

Connections per pole: 1 at solder part, 2 at snap-in


Especially for applications requiring fire hazard tests
as per the standard EN 60335-1, observe Technical data.

female



Housing cutout


male




3-pole, snap-in GST18i3

Color of coding	Application	Pole marking	female	male
			Part No.	Part No.
■ black		N, PE, L	92.031.7657.1	92.032.7657.1
□ white		N, PE, L	92.031.7657.0	92.032.7657.0

female



male




3-pole, solder part GST18i3, solder pin length = 3.3 mm

Color of coding	Application	Pole marking	female	male
			Part No.	Part No.
□ white		N, PE, L	92.033.0057.0	92.034.0057.0


Testing plug

Rated voltage:	250 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged




Testing plug, 3-pole, 1 socket, output 230 V

Color of coding	Application	Pole marking	Part No.
□ black		L, PE, N	92.002.5153.1




Testing plug, 4-pole, 2 sockets, input 230 V

Color of coding	Application	Pole marking	Part No.
■ black		1, PE, N, 2	92.002.5053.0



Testing plug, 4-pole, 2 sockets, output 230 V

Color of coding	Application	Pole marking	Part No.
■ black		1, PE, N, 2	92.002.5253.1



Testing plug, 5 pole, 1 socket, S/D output 230 V

Color of coding	Application	Pole marking	Part No.
■ black		D1, D2, PE, N, L	92.002.5353.0

Mini always fits – smaller is in vogue!

gesis[®]MINI adds an important facet to the **gesis**[®] range. While previously wiring with terminal blocks was tedious painstaking work, the complete power distribution can now be installed with pluggable components throughout – even in the barely accessible corners of a shelf or in narrow channels. Even the most confined spaces are no longer a problem. And the best part: It is possible to implement installations with 250 V and 16 A.

In store design as in exhibition stand construction, the focus these days is on the perfect product experience. The lighting in the shelf itself is becoming ever more important, and this is reflected in more effective illumination, better presentation, and ultimately more sales. The electrical installation must also follow this trend.

Only an installation with compact components can come into play here, as a rule, because both luminaires and ballasts are becoming smaller and smaller. At the same time as this trend toward miniaturization is happening another development is intensifying: Nothing is built to last an eternity anymore – the cycles for modifying presentation systems are shortening all the time. The electrical installation must face up to this as well:

gesis[®]MINI meets both demands and combines minimum size with maximum flexibility. All according to one principle: pluggability.

The use of **gesis**[®]MINI is not confined to eye-catching lighting scenarios involving displays, cabinets, or shelves. The 2, 3, 4, or 5 pole versions actually enable versatile use – in the form of DALI applications, too.

e-
Shop

More information

<http://eshop.wieland-electric.com>





Coding of GST15 connectors


GST15i2

Code 1 L, N white, black	Code 2 D1, D2 pastel blue	Code 3 1, 2 light blue	Code 5 L, N pebble gray
			
Application Mains voltage Protection class II	Application not SELV (e.g. DALI)	Application Low voltage / SELV (50 V)	Application Mains voltage (UPS)

GST15i3

Code 1 L, PE, N white, black	Code 4 1, 2, 3 brown	Code 1 N, PE, 1, 2 white, black
		
Application Mains voltage	Application Switching application	Application Mains voltage

GST15i5

Code 1 3, 2, 1, PE, N white, black	Code 2 D1, D2, L, PE, N pastel blue	Code 3 1, 2, 3, 4, 5 light blue
		
Application Mains voltage	Application not SELV (e.g. DALI)	Application Low voltage / SELV (50 V)

Connector, 2-pole



Screw connection

Rated voltage:	250V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1
Lockable:	Yes

Cross section fine-stranded:	0,5 - 2,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
for insulation and sheath strip lengths please see technical data	

female

male





For cables Ø 3.4 - 5.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Protection class II 250 V	L, N	91.921.2053.1	91.922.2053.1
□ white	Protection class II 250 V	L, N	91.921.2053.0	91.922.2053.0
■ pastel blue	not SELV	D1, D2	91.921.2453.0	91.922.2453.0
■ light blue	SELV	1, 2	91.921.2353.0	91.922.2353.0

female

male



For cables Ø 6 - 7.7 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Protection class II 250 V	L, N	91.921.3053.1	91.922.3053.1
□ white	Protection class II 250 V	L, N	91.921.3053.0	91.922.3053.0
■ pebble gray	Protection class II 250 V	L, N	91.921.3553.0	91.922.3553.0
■ pastel blue	not SELV	D1, D2	91.921.3453.0	91.922.3453.0
■ light blue	SELV	1, 2	91.921.3353.0	91.922.3353.0


Device connectors, 2-pole

Snap-in, Screw connection

Rated voltage:	250V	Lockable:	Yes
Rated current:	16 A	Cross section fine-stranded:	0,5 - 2,5mm ²
Degree of protection (IP):	IP20	Cross section solid:	0,5 - 2,5mm ²
Pollution degree:	2	Rated impulse voltage:	4 kV
Terminations per pole:	1	Housing material:	Polyamide

female

male

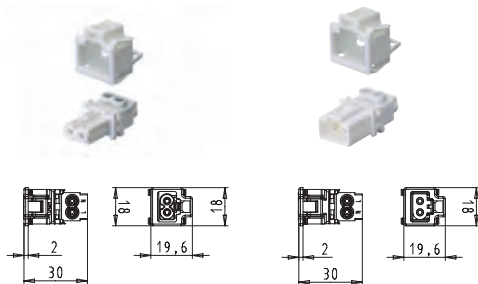

Housing material thickness 0.5-1.5 mm


Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Protection class II 250 V	L, N	91.921.9053.1	91.922.9053.1
□ white	Protection class II 250 V	L, N	91.921.9053.0	91.922.9053.0
■ pebble	Protection class II 250 V	1, 2	91.921.9553.0	91.922.9553.0
gray				
■ pastel blue	not SELV	D1, D2	91.921.9453.0	91.922.9453.0
■ light blue	SELV	1, 2	91.921.9353.0	91.922.9353.0

Solder connector, Soldering connection

Rated voltage:	250V	Terminations per pole:	1
Rated current:	16 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2	Housing material:	Polyamide

female

male

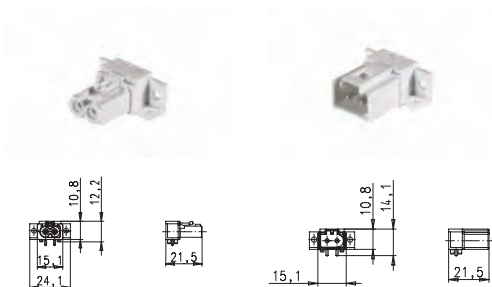


horizontal, with fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Protection class II 250 V	L, N	91.023.0153.1	91.024.0153.1
□ white	Protection class II 250 V	L, N	91.023.0153.0	91.024.0153.0
■ pebble	Protection class II 250 V	L, N	91.023.1153.0	91.024.1153.0
gray				
■ pastel blue	not SELV	D1, D2	91.023.0353.0	91.024.0353.0
■ light blue	SELV	1, 2	91.023.0553.0	91.024.0553.0

female

male

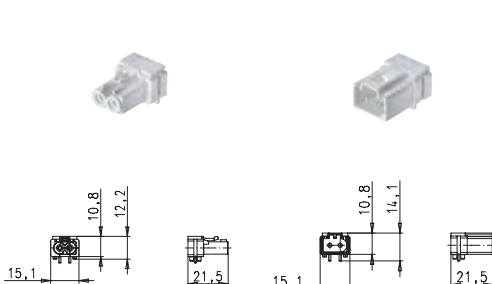

horizontal, without fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Protection class II 250 V	L, N	91.023.0053.1	91.024.0053.1
□ white	Protection class II 250 V	L, N	91.023.0053.0	91.024.0053.0
■ pebble	Protection class II 250 V	L, N	91.023.1053.0	91.024.1053.0
gray				
■ pastel blue	not SELV	D1, D2	91.023.0253.0	91.024.0253.0
■ light blue	SELV	1, 2	91.023.0453.0	91.024.0453.0

Device connectors, 2-pole

Solder connector, Soldering connection

Rated voltage:250V

Rated current:16 A

Degree of protection (IP):IP20

Pollution degree:2

Terminations per pole:1


Lockable:Yes

Rated impulse voltage:4 kV

Housing material:Polyamide

female


male

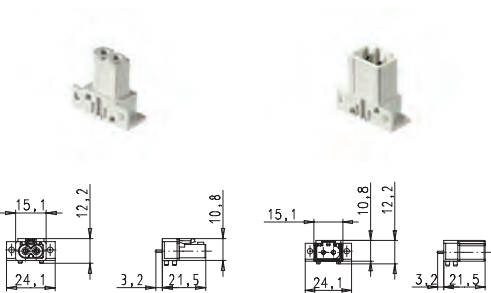

vertical, with fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Protection class II 250 V	L, N	91.021.0153.1	91.022.0153.1
□ white	Protection class II 250 V	L, N	91.021.0153.0	91.022.0153.0
■ pebble gray	Protection class II 250 V	L, N	91.021.1153.0	91.022.1153.0
■ pastel blue	not SELV	D1, D2	91.021.0353.0	91.022.0353.0
■ light blue	SELV	1, 2	91.021.0553.0	91.022.0553.0

female

male

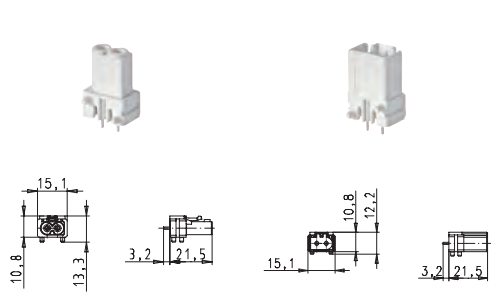


vertical, without fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Protection class II 250 V	L, N	91.021.0053.1	91.022.0053.1
□ white	Protection class II 250 V	L, N	91.021.0053.0	91.022.0053.0
■ pebble gray	Protection class II 250 V	L, N	91.021.1053.0	91.022.1053.0
■ pastel blue	not SELV	D1, D2	91.021.0253.0	91.022.0253.0
■ light blue	SELV	1, 2	91.021.0453.0	91.022.0453.0

Distribution units, intermediate couplings

Rated voltage:	250 V or 250 / 400 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged

Approvals:	
Lockable:	Yes
Mounting plates:	see Accessories


T distributor



2-pole

Color of coding	Application	Outputs	Part No.
□ white	Protection class II 250 V	2	91.020.1053.0
■ black	Protection class II 250 V	2	91.020.1053.1
■ pastel blue	not SELV (6 A)	2	91.020.1253.0
■ light blue	Low voltage / SELV (50 V)	2	91.020.1453.0
■ pebble	Protection class II 250 V	2	91.020.1853.0
gray			


h distributor



2-pole, with mounting option

Color of coding	Application	Outputs	Part No.
□ white	Protection class II 250 V	2	91.020.7053.0
■ black	Protection class II 250 V	2	91.020.7053.1
■ pastel blue	not SELV (6 A)	2	91.020.7153.0
■ light blue	Low voltage / SELV (50 V)	2	91.020.7253.0
■ pebble	Protection class II 250 V	2	91.020.7453.0
gray			


H distributor



2-pole, with mounting option

Color of coding	Application	Outputs	Part No.
□ white	Protection class II 250 V	2	91.020.4953.0
■ black	Protection class II 250 V	2	91.020.4953.1
■ pastel blue	not SELV (6 A)	2	91.020.5053.0
■ light blue	Low voltage / SELV (50 V)	2	91.020.5153.0
■ pebble	Protection class II 250 V	2	91.020.5353.0
gray			

Intermediate coupling



2-pole, locking device for one side


Color of coding	Application	Outputs	Part No.
□ white	Protection class II 250 V	1	91.020.5953.0
■ black	Protection class II 250 V	1	91.020.5953.1
■ pastel blue	not SELV (6 A)	1	91.020.6053.0
■ light blue	Low voltage / SELV (50 V)	1	91.020.6153.0
■ pebble	Protection class II 250 V	1	91.020.6353.0
gray			

Cable assemblies, 2-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

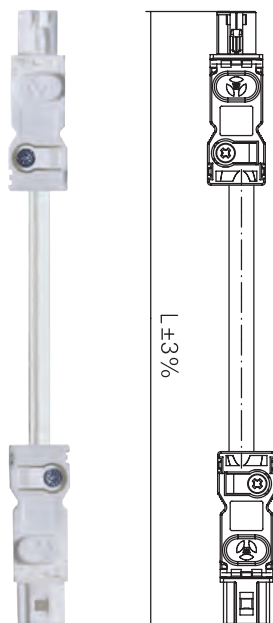

Connecting cable, female - male


		H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
		Length (m)	
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N Application: Protection class II 250 V	1	91.222.1000.1	91.222.1060.1
	2	91.222.2000.1	91.222.2060.1
	3	91.222.3000.1	91.222.3060.1
	4	91.222.4000.1	91.222.4060.1
	5	91.222.5000.1	91.222.5060.1
	6	91.222.6000.1	91.222.6060.1
	7	91.222.7000.1	91.222.7060.1
	8	91.222.8000.1	91.222.8060.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N Application: Protection class II 250 V	1	91.222.1000.2	91.222.1060.2
	2	91.222.2000.2	91.222.2060.2
	3	91.222.3000.2	91.222.3060.2
	4	91.222.4000.2	91.222.4060.2
	5	91.222.5000.2	91.222.5060.2
	6	91.222.6000.2	91.222.6060.2
	7	91.222.7000.2	91.222.7060.2
	8	91.222.8000.2	91.222.8060.2
Cable color: ■ pastel blue Color of coding: ■ pastel blue Marking of poles: D1, D2 Application: not SELV	1	91.222.1000.9	91.222.1060.9
	2	91.222.2000.9	91.222.2060.9
	3	91.222.3000.9	91.222.3060.9
	4	91.222.4000.9	91.222.4060.9
	5	91.222.5000.9	91.222.5060.9
	6	91.222.6000.9	91.222.6060.9
	7	91.222.7000.9	91.222.7060.9
	8	91.222.8000.9	91.222.8060.9
Cable color: □ white Color of coding: ■ light blue Marking of poles: 1, 2 Application: SELV	1	91.222.1000.6	
	2	91.222.2000.6	
	3	91.222.3000.6	
	4	91.222.4000.6	
	5	91.222.5000.6	
	6	91.222.6000.6	
	7	91.222.7000.6	
	8	91.222.8000.6	

Cable assemblies, 2-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

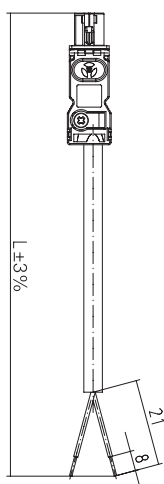

Connection cable, female - free end


		H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color: ■ black		1 91.222.1003.1	91.222.1063.1
Color of coding: ■ black		2 91.222.2003.1	91.222.2063.1
Marking of poles: L, N		3 91.222.3003.1	91.222.3063.1
Application: Protection class II		4 91.222.4003.1	91.222.4063.1
250 V		5 91.222.5003.1	91.222.5063.1
		6 91.222.6003.1	91.222.6063.1
		7 91.222.7003.1	91.222.7063.1
		8 91.222.8003.1	91.222.8063.1
Cable color: □ white		1 91.222.1003.2	91.222.1063.2
Color of coding: □ white		2 91.222.2003.2	91.222.2063.2
Marking of poles: L, N		3 91.222.3003.2	91.222.3063.2
Application: Protection class II		4 91.222.4003.2	91.222.4063.2
250 V		5 91.222.5003.2	91.222.5063.2
		6 91.222.6003.2	91.222.6063.2
		7 91.222.7003.2	91.222.7063.2
		8 91.222.8003.2	91.222.8063.2
Cable color: ■ pastel blue		1 91.222.1003.9	91.222.1063.9
Color of coding: ■ pastel blue		2 91.222.2003.9	91.222.2063.9
Marking of poles: D1, D2		3 91.222.3003.9	91.222.3063.9
Application: not SELV		4 91.222.4003.9	91.222.4063.9
		5 91.222.5003.9	91.222.5063.9
		6 91.222.6003.9	91.222.6063.9
		7 91.222.7003.9	91.222.7063.9
		8 91.222.8003.9	91.222.8063.9
Cable color: □ white		1 91.222.1003.6	
Color of coding: ■ light blue		2 91.222.2003.6	
Marking of poles: 1, 2		3 91.222.3003.6	
Application: SELV		4 91.222.4003.6	
		5 91.222.5003.6	
		6 91.222.6003.6	
		7 91.222.7003.6	
		8 91.222.8003.6	

Cable assemblies, 2-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

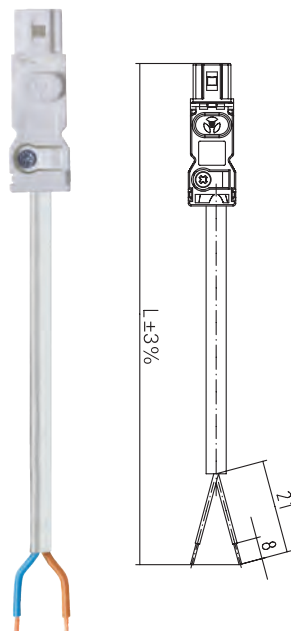

Connection cable, male - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color: ■ black		1 91.222.1004.1	91.222.1064.1
Color of coding: ■ black		2 91.222.2004.1	91.222.2064.1
Marking of poles: L, N		3 91.222.3004.1	91.222.3064.1
Application: Protection class II		4 91.222.4004.1	91.222.4064.1
250 V		5 91.222.5004.1	91.222.5064.1
		6 91.222.6004.1	91.222.6064.1
		7 91.222.7004.1	91.222.7064.1
		8 91.222.8004.1	91.222.8064.1
Cable color: □ white		1 91.222.1004.2	91.222.1064.2
Color of coding: □ white		2 91.222.2004.2	91.222.2064.2
Marking of poles: L, N		3 91.222.3004.2	91.222.3064.2
Application: Protection class II		4 91.222.4004.2	91.222.4064.2
250 V		5 91.222.5004.2	91.222.5064.2
		6 91.222.6004.2	91.222.6064.2
		7 91.222.7004.2	91.222.7064.2
		8 91.222.8004.2	91.222.8064.2
Cable color: ■ pastel blue		1 91.222.1004.9	91.222.1064.9
Color of coding: ■ pastel blue		2 91.222.2004.9	91.222.2064.9
Marking of poles: D1, D2		3 91.222.3004.9	91.222.3064.9
Application: not SELV		4 91.222.4004.9	91.222.4064.9
		5 91.222.5004.9	91.222.5064.9
		6 91.222.6004.9	91.222.6064.9
		7 91.222.7004.9	91.222.7064.9
		8 91.222.8004.9	91.222.8064.9
Cable color: □ white		1 91.222.1004.6	
Color of coding: ■ light blue		2 91.222.2004.6	
Marking of poles: 1, 2		3 91.222.3004.6	
Application: SELV		4 91.222.4004.6	
		5 91.222.5004.6	
		6 91.222.6004.6	
		7 91.222.7004.6	
		8 91.222.8004.6	

Connector, 3-pole

Screw connection

Rated voltage:

250V

Rated current:

16 A

Degree of protection (IP):

IP20

Pollution degree:

2

Terminations per pole:

1

Lockable:

Yes

Cross section fine-stranded:

0,5 - 2,5mm²

Cross section solid:

0,5 - 2,5mm²

Rated impulse voltage:


4 kV

Housing material:


Polyamide

for insulation and sheath strip lengths please see technical data

female




male




For cables Ø 5.5 - 9 mm			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	91.931.3053.1	91.932.3053.1
□ white	Mains 250 V	L, N, PE	91.931.3053.0	91.932.3053.0
■ brown	Switch function 250 V	1, 2, 3	91.931.3853.0	91.932.3853.0

female



male



For cables Ø 5.6 - 11 mm			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	91.931.4053.1	91.932.4053.1
□ white	Mains 250 V	L, N, PE	91.931.4053.0	91.932.4053.0

Device connectors, 3-pole



Snap-in, Screw connection

Rated voltage:	250V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1

Lockable:	Yes
Cross section fine-stranded:	0,5 - 2,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male





Housing material thickness 0.5-1.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	91.931.9053.1	91.932.9053.1
□ white	Mains 250 V	L, N, PE	91.931.9053.0	91.932.9053.0
■ brown	Switch function 250 V	1, 2, 3	91.931.9853.0	91.932.9853.0

female

male



Housing material thickness 0.5-1.5 mm, protruding, not pluggable with flush-mounted snap-ins

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	91.931.9153.1	91.932.9153.1
□ white	Mains 250 V	L, N, PE	91.931.9153.0	91.932.9153.0




Solder connector, Soldering connection

Rated voltage:	250V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2

Terminations per pole:	1
Lockable:	Yes
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male



horizontal, with fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250 V	L, N, PE	91.033.0153.1	91.034.0153.1
□ white	Mains 250 V	L, N, PE	91.033.0153.0	91.034.0153.0
■ brown	Switch function 250 V	1, 2, 3	91.033.0753.0	91.034.0753.0

Device connectors, 3-pole



Solder connector, Soldering connection

Rated voltage:	250V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2

Terminations per pole:	1
Lockable:	Yes
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male



horizontal, without fastening flange



female

male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	91.033.0053.1	91.034.0053.1
□ white	Mains 250 V	L, N, PE	91.033.0053.0	91.034.0053.0
■ brown	Switch function 250 V	1, 2, 3	91.033.0653.0	91.034.0653.0

female

male



vertical, with fastening flange



female

male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	91.031.0153.1	91.032.0153.1
□ white	Mains 250 V	L, N, PE	91.031.0153.0	91.032.0153.0
■ brown	Switch function 250 V	1, 2, 3	91.031.0753.0	91.032.0753.0

female

male



vertical, without fastening flange

female

male


Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250 V	L, N, PE	91.031.0053.1	91.032.0053.1
□ white	Mains 250 V	L, N, PE	91.031.0053.0	91.032.0053.0
■ brown	Switch function 250 V	1, 2, 3	91.031.0653.0	91.032.0653.0

Distribution units, intermediate couplings

Rated voltage:	250 V or 250 / 400 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged

Approvals:	
Lockable:	Yes
Mounting plates:	see Accessories


h distributor

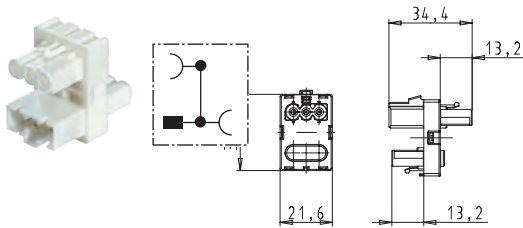

3-pole, with mounting option

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	2	91.030.6053.0
■ black	Mains 250 V	2	91.030.6053.1


H distributor

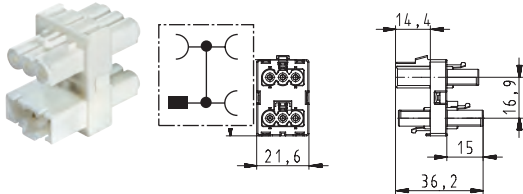

3-pole, with mounting option

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	3	91.030.4953.0
■ black	Mains 250 V	3	91.030.4953.1


HH distributor

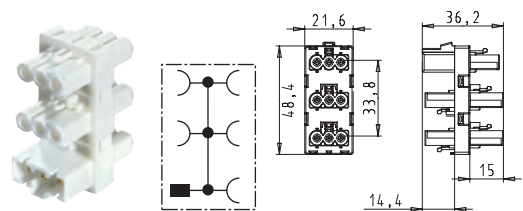

3-pole, with mounting option

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	5	91.030.5253.0
■ black	Mains 250 V	5	91.030.5253.1


Intermediate coupling

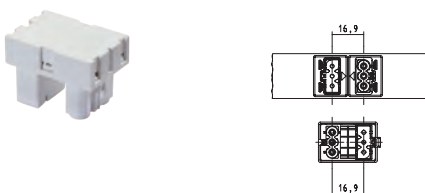

3-pole, U-piece

Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	1	91.030.5853.0
■ black	Mains 250 V	1	91.030.5853.1

Intermediate coupling

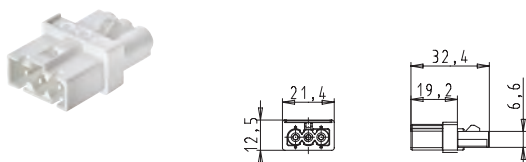

3-pole, locking device for one side


Color of coding	Application	Outputs	Part No.
□ white	Mains 250 V	1	91.030.5953.0
■ black	Mains 250 V	1	91.030.5953.1

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

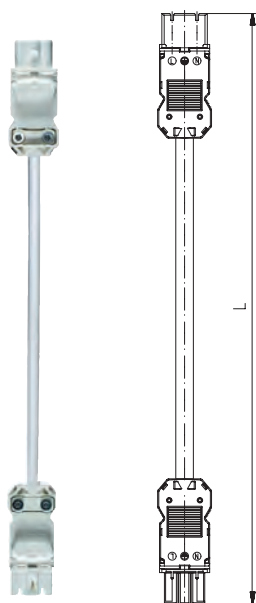

Connecting cable, female - male


		S05Z1Z1-F halogen free		H05VV-F halogenated	
		Length (m)	Part No.	Part No.	
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1		91.232.1060.1	91.232.1000.1	
	2		91.232.2060.1	91.232.2000.1	
	3		91.232.3060.1	91.232.3000.1	
	4		91.232.4060.1	91.232.4000.1	
	5		91.232.5060.1	91.232.5000.1	
	6		91.232.6060.1	91.232.6000.1	
	7		91.232.7060.1	91.232.7000.1	
	8		91.232.8060.1	91.232.8000.1	
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V	1		91.232.1060.2	91.232.1000.2	
	2		91.232.2060.2	91.232.2000.2	
	3		91.232.3060.2	91.232.3000.2	
	4		91.232.4060.2	91.232.4000.2	
	5		91.232.5060.2	91.232.5000.2	
	6		91.232.6060.2	91.232.6000.2	
	7		91.232.7060.2	91.232.7000.2	
	8		91.232.8060.2	91.232.8000.2	
Cable color: ■ brown Color of coding: ■ brown Marking of poles: 1, 2, 3 Application: Switch function 250 V	1			91.232.1000.4	
	2			91.232.2000.4	
	3			91.232.3000.4	
	4			91.232.4000.4	
	5			91.232.5000.4	
	6			91.232.6000.4	
	7			91.232.7000.4	
	8			91.232.8000.4	

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage: 250V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

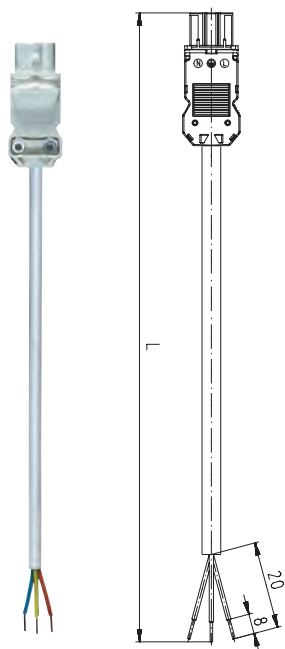

Connection cable, female - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
	Length (m)	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1	91.232.1003.1	91.232.1063.1
	2	91.232.2003.1	91.232.2063.1
	3	91.232.3003.1	91.232.3063.1
	4	91.232.4003.1	91.232.4063.1
	5	91.232.5003.1	91.232.5063.1
	6	91.232.6003.1	91.232.6063.1
	7	91.232.7003.1	91.232.7063.1
	8	91.232.8003.1	91.232.8063.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V	1	91.232.1003.2	91.232.1063.2
	2	91.232.2003.2	91.232.2063.2
	3	91.232.3003.2	91.232.3063.2
	4	91.232.4003.2	91.232.4063.2
	5	91.232.5003.2	91.232.5063.2
	6	91.232.6003.2	91.232.6063.2
	7	91.232.7003.2	91.232.7063.2
	8	91.232.8003.2	91.232.8063.2
Cable color: ■ brown Color of coding: ■ black Marking of poles: 1, 2, 3 Application: Switch function 250 V	1	91.232.1003.4	
	2	91.232.2003.4	
	3	91.232.3003.4	
	4	91.232.4003.4	
	5	91.232.5003.4	
	6	91.232.6003.4	
	7	91.232.7003.4	
	8	91.232.8003.4	


Connection cable, male - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
	Length (m)	Part No.	Part No.
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1	91.232.1004.1	91.232.1064.1
	2	91.232.2004.1	91.232.2064.1
	3	91.232.3004.1	91.232.3064.1
	4	91.232.4004.1	91.232.4064.1
	5	91.232.5004.1	91.232.5064.1
	6	91.232.6004.1	91.232.6064.1
	7	91.232.7004.1	91.232.7064.1
	8	91.232.8004.1	91.232.8064.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V	1	91.232.1004.2	91.232.1064.2
	2	91.232.2004.2	91.232.2064.2
	3	91.232.3004.2	91.232.3064.2
	4	91.232.4004.2	91.232.4064.2
	5	91.232.5004.2	91.232.5064.2
	6	91.232.6004.2	91.232.6064.2
	7	91.232.7004.2	91.232.7064.2
	8	91.232.8004.2	91.232.8064.2
Cable color: ■ brown Color of coding: ■ black Marking of poles: 1, 2, 3 Application: Switch function 250 V	1	91.232.1004.4	
	2	91.232.2004.4	
	3	91.232.3004.4	
	4	91.232.4004.4	
	5	91.232.5004.4	
	6	91.232.6004.4	
	7	91.232.7004.4	
	8	91.232.8004.4	

Cable assemblies, 3-pole

1.5 mm², 16 A

Rated voltage:	250V	Pollution degree:	2
Rated current:	16 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV

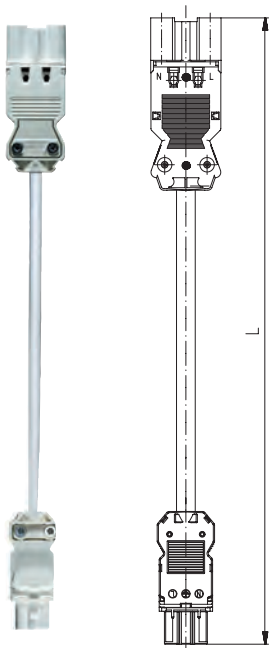

Adapter cable, GST18i3 male – GST15i3 female		H05VV-F halogenated Part No.	H05Z1Z1-F halogen free Part No.
Length (m)			
Cable color: ■ black Color of coding: ■ black Marking of poles: L, N, PE Application: Mains 250 V	1	91.232.1009.1	91.232.1069.1
	2	91.232.2009.1	91.232.2069.1
	3	91.232.3009.1	91.232.3069.1
	4	91.232.4009.1	91.232.4069.1
	5	91.232.5009.1	91.232.5069.1
	6	91.232.6009.1	91.232.6069.1
	7	91.232.7009.1	91.232.7069.1
	8	91.232.8009.1	91.232.8069.1
Cable color: □ white Color of coding: □ white Marking of poles: L, N, PE Application: Mains 250 V	1	91.232.1009.2	91.232.1069.2
	2	91.232.2009.2	91.232.2069.2
	3	91.232.3009.2	91.232.3069.2
	4	91.232.4009.2	91.232.4069.2
	5	91.232.5009.2	91.232.5069.2
	6	91.232.6009.2	91.232.6069.2
	7	91.232.7009.2	91.232.7069.2
	8	91.232.8009.2	91.232.8069.2


Connector, 4-pole

Screw connection

Rated voltage:	250V/ 400V	Cross section fine-stranded:	0,5 - 2,5mm²
Rated current:	16 A	Cross section solid:	0,5 - 2,5mm²
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2	Housing material:	Polyamide
Terminations per pole:	1	for insulation and sheath strip lengths please see technical data	
Lockable:	Yes		

female

male

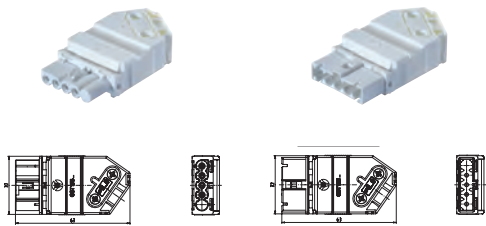

For cables Ø 6 - 11.5 mm


female

male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	2, 1, PE, N	91.941.3053.1	91.942.3053.1
□ white	Mains 250/400 V	2, 1, PE, N	91.941.3053.0	91.942.3053.0

female

male

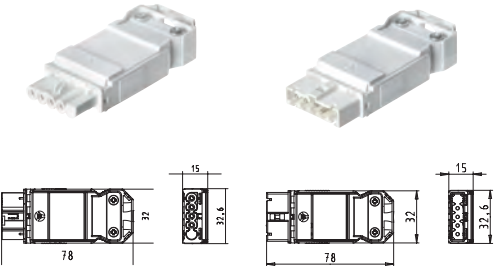

For cables Ø 8.5 - 12.5 mm

female

male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	2, 1, PE, N	91.941.4053.1	91.942.4053.1
□ white	Mains 250/400 V	2, 1, PE, N	91.941.4053.0	91.942.4053.0

Device connectors, 4-pole


Snap-in, Screw connection

Rated voltage:	250V/ 400V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1

Lockable:	Yes
Cross section fine-stranded:	0,5 - 2,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

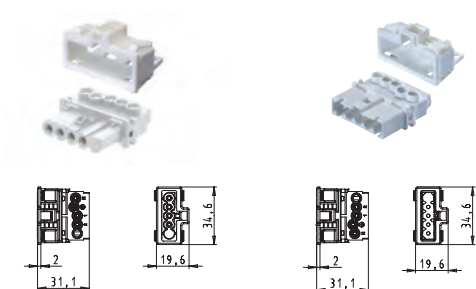

Housing material thickness 0.5-1.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	2, 1, PE, N	91.941.9053.1	91.942.9053.1
□ white	Mains 250/400 V	2, 1, PE, N	91.941.9053.0	91.942.9053.0


Solder connector, Soldering connection

Rated voltage:	250V/ 400V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2

Terminations per pole:	1
Lockable:	Yes
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

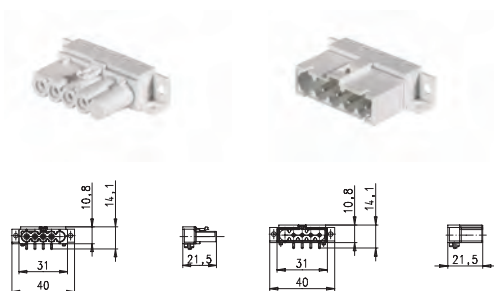


horizontal, with fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	2, 1, PE, N	91.043.0153.1	91.044.0153.1
□ white	Mains 250/400 V	2, 1, PE, N	91.043.0153.0	91.044.0153.0

female

male

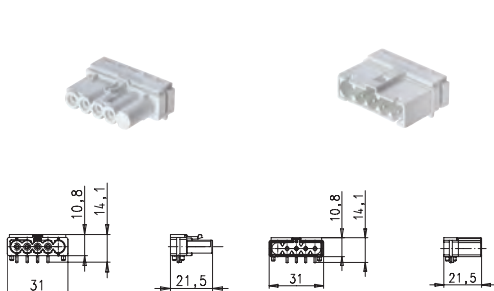

horizontal, without fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	2, 1, PE, N	91.043.0053.1	91.044.0053.1
□ white	Mains 250/400 V	2, 1, PE, N	91.043.0053.0	91.044.0053.0

Device connectors, 4-pole

Solder connector, Soldering connection

Rated voltage:250V/ 400V

Rated current:16 A

Degree of protection (IP):IP20

Pollution degree:2

Terminations per pole:1


Lockable:Yes

Rated impulse voltage:4 kV

Housing material:Polyamide

female


male

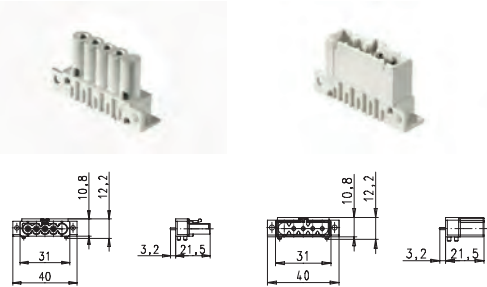

vertical, with fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	2, 1, PE, N	91.041.0153.1	91.042.0153.1
□ white	Mains 250/400 V	2, 1, PE, N	91.041.0153.0	91.042.0153.0

female

male

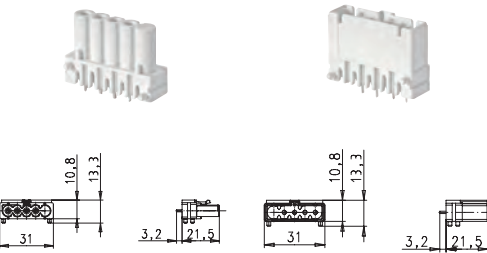

vertical, without fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	2, 1, PE, N	91.041.0053.1	91.042.0053.1
□ white	Mains 250/400 V	2, 1, PE, N	91.041.0053.0	91.042.0053.0

Cable assemblies, 4-pole


1.5 mm², 16 A

Rated voltage:	250V/ 400V	Pollution degree:	2
Rated current:	16 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV

Connecting cable, female - male

	H05VV-F halogenated	H05Z1Z1-F halogen free
Length (m)	Part No.	Part No.


Cable color:	☐ white	☐ white
Color of coding:	☐ white	
Marking of poles:	2, 1, PE, N	
Application:	Mains 250/400 V	
	1	91.207.1000.2
	2	91.207.2000.2
	3	91.207.3000.2
	4	91.207.4000.2
	5	91.207.5000.2
	6	91.207.6000.2
	7	91.207.7000.2
	8	91.207.8000.2

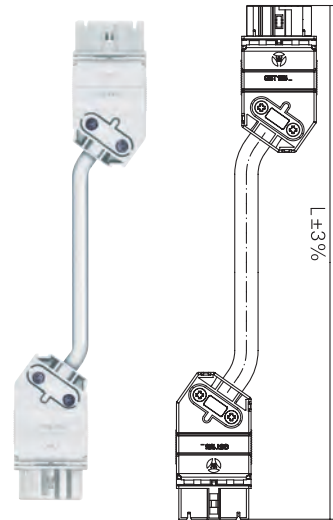

Cable assemblies, 4-pole


1.5 mm², 16 A

Rated voltage:	250V/ 400V	Lockable:	Yes
Rated current:	16 A	Preparation of conductor ends:	Ultrasonically compressed wire ends
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		

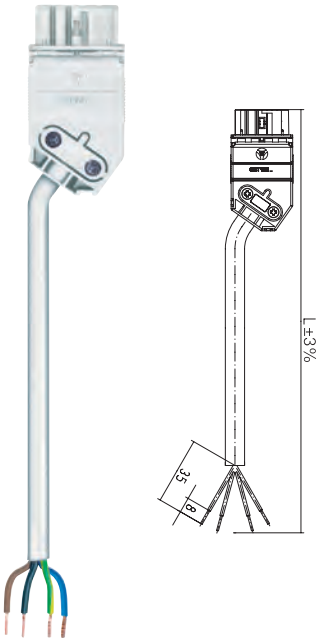

Connection cable, female - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color:	☐ white	☐ white	☐ white
Color of coding:	☐ white	1 91.207.1003.2	91.207.1063.2
Marking of poles:	2, 1, PE, N	2 91.207.2003.2	91.207.2063.2
Application:	Mains 250/400 V	3 91.207.3003.2	91.207.3063.2
		4 91.207.4003.2	91.207.4063.2
		5 91.207.5003.2	91.207.5063.2
		6 91.207.6003.2	91.207.6063.2
		7 91.207.7003.2	91.207.7063.2
		8 91.207.8003.2	91.207.8063.2

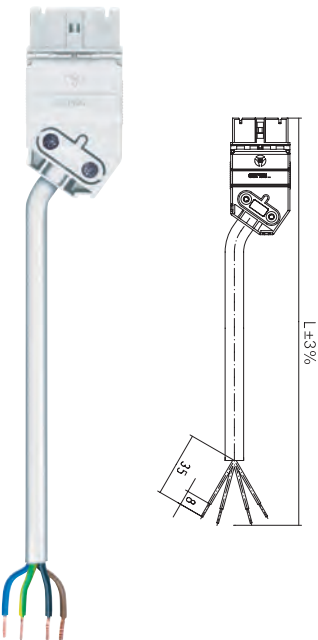

Connection cable, male - free end

		H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color:	☐ white	☐ white	☐ white
Color of coding:	☐ white	1 91.207.1004.2	91.207.1064.2
Marking of poles:	2, 1, PE, N	2 91.207.2004.2	91.207.2064.2
Application:	Mains 250/400 V	3 91.207.3004.2	91.207.3064.2
		4 91.207.4004.2	91.207.4064.2
		5 91.207.5004.2	91.207.5064.2
		6 91.207.6004.2	91.207.6064.2
		7 91.207.7004.2	91.207.7064.2
		8 91.207.8004.2	91.207.8064.2

Connector, 5-pole



Screw connection

Rated voltage:	250V/ 400V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1
Lockable:	Yes

Cross section fine-stranded:	0,5 - 2,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide
for insulation and sheath strip lengths please see technical data	

female

male





For cables Ø 6 - 11.5 mm

Color of coding	Application	Marking of poles	female	male
			Part No.	Part No.
■ black	Mains 250/400 V	3, 2, 1, PE, N	91.951.3053.1	91.952.3053.1
□ white	Mains 250/400 V	3, 2, 1, PE, N	91.951.3053.0	91.952.3053.0
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	91.951.3453.0	91.952.3453.0
■ light blue	SELV	1, 2, 3, 4, 5	91.951.3353.0	91.952.3353.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3, 4/N	91.951.3253.0	91.952.3253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4, 5/N	91.951.3653.0	91.952.3653.0

female

male



For cables Ø 8.5 - 12.5 mm

Color of coding	Application	Marking of poles	female	male
			Part No.	Part No.
■ black	Mains 250/400 V	3, N, PE, 2, 1	91.951.4053.1	91.952.4053.1
□ white	Mains 250/400 V	3, N, PE, 2, 1	91.951.4053.0	91.952.4053.0
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	91.951.4453.0	91.952.4453.0
■ light blue	SELV	1, 2, 3, 4, 5	91.951.4353.0	91.952.4353.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3, 4/N	91.951.4253.0	91.952.4253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4, 5/N	91.951.4653.0	91.952.4653.0

Device connectors, 5-pole


Snap-in, Screw connection

Rated voltage:	250V/ 400V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2
Terminations per pole:	1

Lockable:	Yes
Cross section fine-stranded:	0,5 - 2,5mm ²
Cross section solid:	0,5 - 2,5mm ²
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

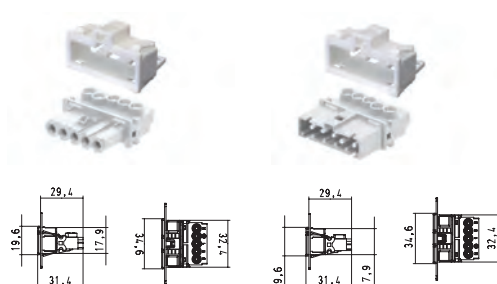

Housing material thickness 0.5-1.5 mm

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, 2, 1, PE, N	91.951.9053.1	91.952.9053.1
□ white	Mains 250/400 V	3, 2, 1, PE, N	91.951.9053.0	91.952.9053.0
■ pastel blue	Mains 250 V + not SELV	D1, D2, L, PE, N	91.951.9453.0	91.952.9453.0
■ light blue	SELV	1, 2, 3, 4, 5	91.951.9353.0	91.952.9353.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3, 4/N	91.951.9253.0	91.952.9253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4, 5/N	91.951.9653.0	91.952.9653.0


Solder connector, Soldering connection

Rated voltage:	250V/ 400V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2

Terminations per pole:	1
Lockable:	Yes
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male

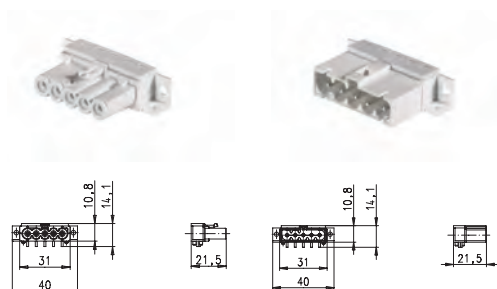


horizontal, with fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, 2, 1, PE, N	91.053.0153.1	91.054.0153.1
□ white	Mains 250/400 V	3, 2, 1, PE, N	91.053.0153.0	91.054.0153.0
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	91.053.0353.0	91.054.0353.0
■ light blue	SELV	1, 2, 3, 4, 5	91.053.0553.0	91.054.0553.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3, 4/N	91.053.1353.0	91.054.1353.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4, 5/N	91.053.1553.0	91.054.1553.0

female

male

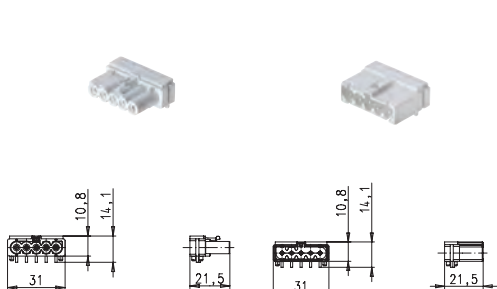

horizontal, without fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Mains 250/400 V	3, 2, 1, PE, N	91.053.0053.1	91.054.0053.1
□ white	Mains 250/400 V	3, 2, 1, PE, N	91.053.0053.0	91.054.0053.0
■ Pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	91.053.0253.0	91.054.0253.0
■ Light blue	SELV	1, 2, 3, 4, 5	91.053.0453.0	91.054.0453.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3, 4/N	91.053.1253.0	91.054.1253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4, 5/N	91.053.1453.0	91.054.1453.0

Device connectors, 5-pole



Solder connector, Soldering connection

Rated voltage:	250V/ 400V
Rated current:	16 A
Degree of protection (IP):	IP20
Pollution degree:	2

Terminations per pole:	1
Lockable:	Yes
Rated impulse voltage:	4 kV
Housing material:	Polyamide

female

male



vertical, with fastening flange


female

male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	3, 2, 1, PE, N	91.051.0153.1	91.052.0153.1
□ white	Mains 250/400 V	3, 2, 1, PE, N	91.051.0153.0	91.052.0153.0
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	91.051.0353.0	91.052.0353.0
■ light blue	SELV	1, 2, 3, 4, 5	91.051.0553.0	91.052.0553.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3, 4/N	91.051.1353.0	91.052.1353.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4, 5/N	91.051.1553.0	91.052.1553.0

female

male



vertical, without fastening flange

female


male

Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Mains 250/400 V	3, 2, 1, PE, N	91.051.0053.1	91.052.0053.1
□ white	Mains 250/400 V	3, 2, 1, PE, N	91.051.0053.0	91.052.0053.0
■ pastel blue	Mains 250 V + not SELV	L, N, PE, D2, D1	91.051.0253.0	91.052.0253.0
■ light blue	SELV	1, 2, 3, 4, 5	91.051.0453.0	91.052.0453.0
■ may green	Acc. to customer requirements (with PE)	1, 2, PE, 3, 4/N	91.051.1253.0	91.052.1253.0
■ turquoise	Acc. to customer requirements (without PE)	1, 2, 3, 4, 5/N	91.051.1453.0	91.052.1453.0

Distribution units, intermediate couplings

Rated voltage:	250 V or 250 / 400 V	Approvals:	
Rated current:	16 A	Lockable:	Yes
Rated impulse voltage:	4 kV		
Degree of protection (IP):	IP20, IP40 when plugged		


Distribution unit

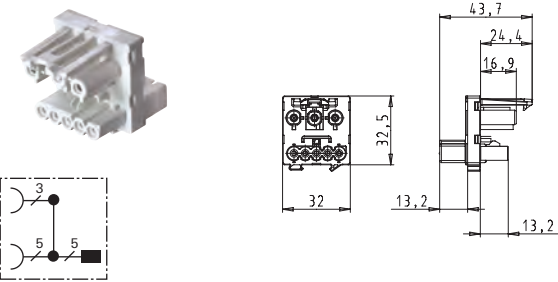

5-pole, without mounting option, transition from GST15i5 to GST18i3

Color of coding	Application	Tapping	Part No.
☐ white	Mains 250 V	L1	91.050.3151.0
☐ white	Mains 250 V	L2	91.050.3251.0
☐ white (6 A)	Mains 250 V	L3	91.050.3351.0

Intermediate coupling

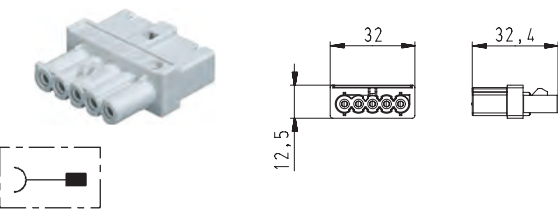

5-pole, locking device for one side


Color of coding	Application	Outputs	Part No.
☐ white	Mains 250/400 V	1	91.050.5953.0
☒ black	Mains 250/400 V	1	91.050.5953.1
☐ pastel blue	Mains 250 V + not SELV	1	91.050.6053.0

Cable assemblies, 5-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 4 kV

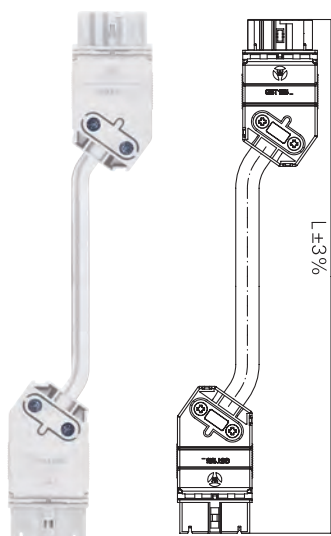

Connecting cable, female - male


Connecting cable, female - male		H05VV-F halogenated	H05Z1Z1-F halogen free
		Length (m)	Part No.
Cable color:	■ black	■ black	■ black
Color of coding:	■ black	91.257.1000.1	91.257.1060.1
Marking of poles:	3, 2, 1, PE, N	91.257.2000.1	91.257.2060.1
Application:	Mains 250/400 V	91.257.3000.1	91.257.3060.1
		91.257.4000.1	91.257.4060.1
		91.257.5000.1	91.257.5060.1
		91.257.6000.1	91.257.6060.1
		91.257.7000.1	91.257.7060.1
		91.257.8000.1	91.257.8060.1
Cable color:	□ white	□ white	□ white
Color of coding:	□ white	91.257.1000.2	91.257.1060.2
Marking of poles:	3, 2, 1, PE, N	91.257.2000.2	91.257.2060.2
Application:	Mains 250/400 V	91.257.3000.2	91.257.3060.2
		91.257.4000.2	91.257.4060.2
		91.257.5000.2	91.257.5060.2
		91.257.6000.2	91.257.6060.2
		91.257.7000.2	91.257.7060.2
		91.257.8000.2	91.257.8060.2
Cable color:	■ pastel blue	□ white	□ white
Color of coding:	■ pastel blue	91.257.1000.9	91.257.1060.9
Marking of poles:	D1, D2, L, PE, N	91.257.2000.9	91.257.2060.9
Application:	Mains 250 V + not SELV	91.257.3000.9	91.257.3060.9
		91.257.4000.9	91.257.4060.9
		91.257.5000.9	91.257.5060.9
		91.257.6000.9	91.257.6060.9
		91.257.7000.9	91.257.7060.9
		91.257.8000.9	91.257.8060.9

Cable assemblies, 5-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

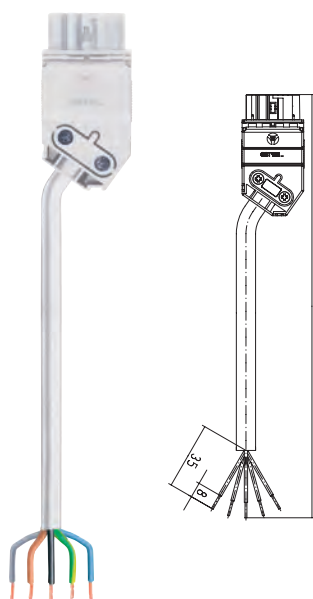

Connection cable, female - free end


	Length (m)	H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color: ■ black		■ black	■ black
Color of coding: ■ black	1	91.257.1003.1	91.257.1063.1
Marking of poles: 3, 2, 1, PE, N	2	91.257.2003.1	91.257.2063.1
Application: Mains 250/400 V	3	91.257.3003.1	91.257.3063.1
	4	91.257.4003.1	91.257.4063.1
	5	91.257.5003.1	91.257.5063.1
	6	91.257.6003.1	91.257.6063.1
	7	91.257.7003.1	91.257.7063.1
	8	91.257.8003.1	91.257.8063.1
Cable color: □ white		□ white	□ white
Color of coding: □ white	1	91.257.1003.2	91.257.1063.2
Marking of poles: 3, 2, 1, PE, N	2	91.257.2003.2	91.257.2063.2
Application: Mains 250/400 V	3	91.257.3003.2	91.257.3063.2
	4	91.257.4003.2	91.257.4063.2
	5	91.257.5003.2	91.257.5063.2
	6	91.257.6003.2	91.257.6063.2
	7	91.257.7003.2	91.257.7063.2
	8	91.257.8003.2	91.257.8063.2
Cable color: ■ pastel blue		□ white	□ white
Color of coding: ■ pastel blue	1	91.257.1003.9	91.257.1063.9
Marking of poles: D1, D2, L, PE, N	2	91.257.2003.9	91.257.2063.9
Application: Mains 250 V + not SELV	3	91.257.3003.9	91.257.3063.9
	4	91.257.4003.9	91.257.4063.9
	5	91.257.5003.9	91.257.5063.9
	6	91.257.6003.9	91.257.6063.9
	7	91.257.7003.9	91.257.7063.9
	8	91.257.8003.9	91.257.8063.9

Cable assemblies, 5-pole

1.5 mm², 16 A

Rated voltage: 250V/ 400V
 Rated current: 16 A
 Degree of protection (IP): IP20
 Pollution degree: 2

Lockable: Yes
 Preparation of conductor ends: Ultrasonically compressed wire ends
 Rated impulse voltage: 4 kV

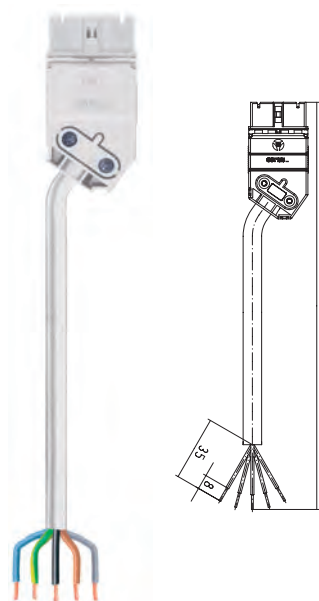

Connection cable, male - free end

	Length (m)	H05VV-F halogenated	H05Z1Z1-F halogen free
		Part No.	Part No.
Cable color: ■ black		■ black	■ black
Color of coding: ■ black	1	91.257.1004.1	91.257.1064.1
Marking of poles: 3, 2, 1, PE, N	2	91.257.2004.1	91.257.2064.1
Application: Mains 250/400 V	3	91.257.3004.1	91.257.3064.1
	4	91.257.4004.1	91.257.4064.1
	5	91.257.5004.1	91.257.5064.1
	6	91.257.6004.1	91.257.6064.1
	7	91.257.7004.1	91.257.7064.1
	8	91.257.8004.1	91.257.8064.1
Cable color: □ white		□ white	□ white
Color of coding: □ white	1	91.257.1004.2	91.257.1064.2
Marking of poles: 3, 2, 1, PE, N	2	91.257.2004.2	91.257.2064.2
Application: Mains 250/400 V	3	91.257.3004.2	91.257.3064.2
	4	91.257.4004.2	91.257.4064.2
	5	91.257.5004.2	91.257.5064.2
	6	91.257.6004.2	91.257.6064.2
	7	91.257.7004.2	91.257.7064.2
	8	91.257.8004.2	91.257.8064.2
Cable color: ■ pastel blue		□ white	□ white
Color of coding: ■ pastel blue	1	91.257.1004.9	91.257.1064.9
Marking of poles: D1, D2, L, PE, N	2	91.257.2004.9	91.257.2064.9
Application: Mains 250 V + not SELV	3	91.257.3004.9	91.257.3064.9
	4	91.257.4004.9	91.257.4064.9
	5	91.257.5004.9	91.257.5064.9
	6	91.257.6004.9	91.257.6064.9
	7	91.257.7004.9	91.257.7064.9
	8	91.257.8004.9	91.257.8064.9

Cable assemblies, 5-pole

2.5 mm², 16 A

Rated voltage:	250V/ 400V	Pollution degree:	2
Rated current:	16 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV

Connection cable, female - male

H05Z1Z1-F


halogen free

Length (m) Part No.

Cable color:	☐ white	1	☐ white	91.253.1060.2
Color of coding:	3, 2, 1, N, PE	2		91.253.2060.2
Marking of poles:		4		91.253.4060.2
Application:	Mains 250/400 V	6		91.253.6060.2
		8		91.253.8060.2

Mounting material, sample kits


Mounting plate

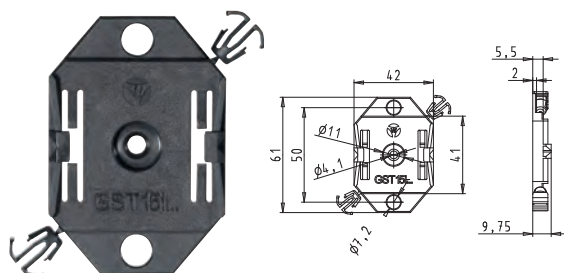

GST15 mounting plate for h/H distributors

Color	Part No.
■ black	07.418.9153.1

Mounting plate

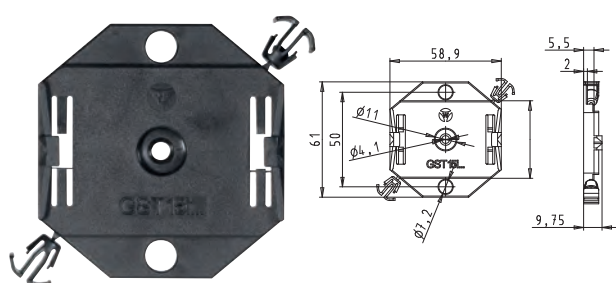

GST15 mounting plate for HH distributors

Color	Part No.
■ black	07.418.9253.1

GST15i3 sample kit



3 pole

Part No.
gesis MINI 3-pole
99.491.0000.0

GST15i2...i5 sample kit



2-pole to 5-pole

Part No.
gesis MINI SET
99.427.0000.0

Invisible installations for your presentation!

Our **gesis**[®]MICRO connector system connects your light in showcases and on shelves – in places where no one else can reach. And it does so in the simplest way imaginable.


Because **gesis**[®]MICRO is so small, all you need is a drilled hole to run the lines through. Because **gesis**[®]MICRO comes as a pre-assembled cable, you do not have to connect the plugs manually – it is all “plug-and-play”. And because **gesis**[®]MICRO is matched to the whole **gesis**[®] family, you receive a complete system – and you can extend your installation, even as far as the earth contact plug of the power cord.

This makes the electrical installation inside your furniture “invisible” from the outside, so that nothing distracts the eye from the things that matter.







More information

<http://eshop.wieland-electric.com>

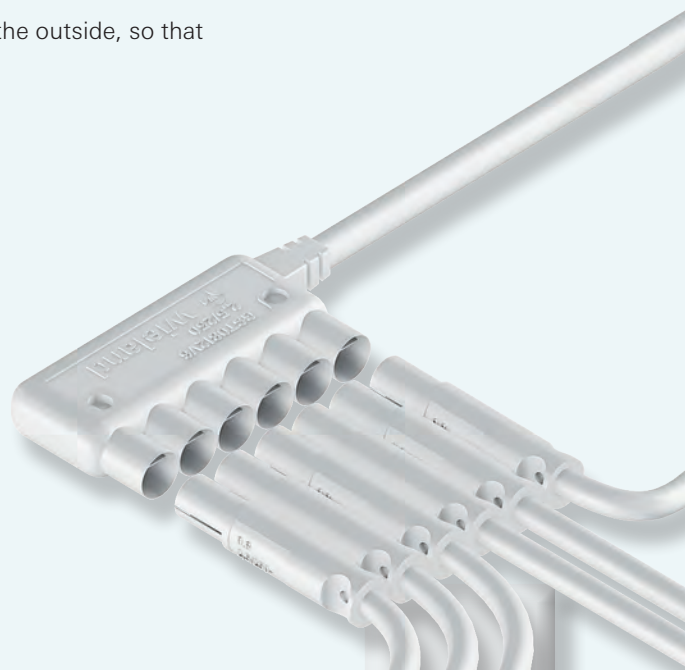


Coding of GST08i2 connectors

GST08i02

Code 1 L, N white	Code 2 +, - blue	Code 3 +, - green	Code 5 +, - yellow
			
Application Mains voltage (protection class II)	Application Low voltage (12 V)	Application Low voltage (24 V)	Application Low voltage (constant current)

GST08i3

Code 1 L, N, PE white

Application Mains voltage (protection class I)

Device connectors, 2-pole

Solder connector, Soldering connection

Degree of protection (IP):

IP20

Lockable:

No

Pollution degree:



2

Housing material:

Polyamide

female

male



horizontal, without fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
blue	Extra-low voltage parallel	+, -	90.001.0153.0	90.002.0153.0
green	Extra-low voltage parallel	+, -	90.011.0153.0	90.012.0153.0
yellow	Extra-low voltage series	+, -	90.021.0153.0	90.022.0153.0
white	Protection class II 250 V	L, N	90.031.0153.0	90.032.0153.0


Distribution block, 2-pole, 0.75 mm²

Degree of protection (IP):

IP20, IP40 when plugged


Lockable:

No



Distribution block, 2-pole

Color of coding	Application	Outputs	Part No.
☐ white	(250 V/2,5 A/AC)	2	90.030.0153.0
☒ blue	(12 V/6 A)	2	90.000.0153.0
☒ green	(24 V/6 A)	2	90.010.0153.0
☐ yellow	(50 V/6 A/DC)	2	90.020.0153.0

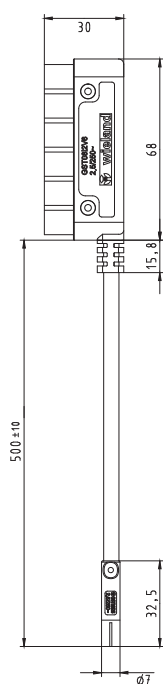

Distribution block, 2-pole, with extension cable

H03V2V2H2-F
halogenated
Part No.

Length (m)

Cable color: ☐ white
 Color of coding: ☐ white
 Pole marking: L, N
 Application: Mains voltage
 Outputs: 6

0.5

☐ white
 90.230.0526.2

Distribution block, 2-pole, 1x input, free end

H03V2V2H2-F
halogenated
Part No.

Length (m)

Cable color: ☒ blue
 Color of coding: ☒ blue
 Pole marking: +, -
 Application: Low voltage (12 V)
 Outputs: 6

0.15

☐ white
 99.413.0000.8

Distribution block, 2-pole, 1x input, free end

H03V2V2H2-F
halogenated
Part No.

Length (m)

Cable color: ☒ green
 Color of coding: ☒ green
 Pole marking: +, -
 Application: Low voltage (24 V)
 Outputs: 6

0.15

☐ white
 99.419.0000.8

Accessories




Sealing grommet IP44, 2-pole

Color	Part No.
☐ transparent	06.562.3200.0



Cover for distribution units and female connectors, 2-pole

Color	Part No.
☐ white	06.562.3100.0



Housing installation frame for GST08i2, 2-pole

Part No.
Installation frame incl. fixation screws
99.450.0000.8

Cable assemblies, 2-pole


0.5 mm², 6 A			
Rated voltage:	24V	Pollution degree:	2
Rated current:	6 A	Lockable:	No
Degree of protection (IP):	IP20		

Connecting cable, female - male

LiYZ
halogenated

Length (m)	Part No.
------------	----------


Cable color:		☐ white
Color of coding:	☒ green	0.5 90.215.0530.2
Marking of poles:	+, -	1 90.215.1030.2
Application:	Extra-low voltage parallel	1.5 90.215.1530.2

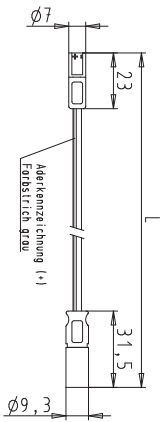

Cable assemblies, 2-pole

0.5 mm², 6 A			
Rated voltage:	24V	Lockable:	No
Rated current:	6 A	Preparation of conductor ends:	Cable end sleeve
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV
Pollution degree:	2		



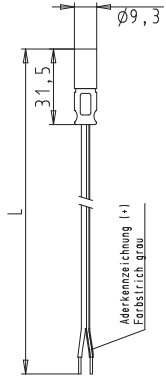


Connection cable, female - free end

	Length (m)	LiYZ halogenated Part No.
Cable color:		☐ white
Color of coding: ☒ green	0.5	90.215.0533.2
Marking of poles: +, -	1	90.215.1033.2
Application: Extra-low voltage parallel	1.5	90.215.1533.2

gesis® MICRO



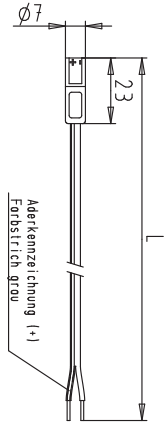

Connection cable, male - free end


	Length (m)	LiYZ halogenated Part No.
Cable color:		☐ white
Color of coding: ☒ green	0.5	90.215.0534.2
Marking of poles: +, -	1	90.215.1034.2
Application: Extra-low voltage parallel	1.5	90.215.1534.2

Cable assemblies, 2-pole

0.75 mm², 2.5 A

Rated voltage: 250V
 Rated current: 2.5 A
 Degree of protection (IP): IP20

Lockable: No
 Preparation of conductor ends: Cable end sleeve

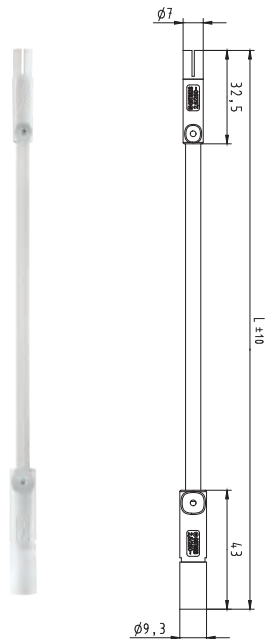


Connecting cable, female - male

		H03V2V2H2-F halogenated Part No.	H03Z1Z1H2-F halogen free Part No.
	Length (m)		
Cable color:		☐ white	☐ white
Color of coding:	1	90.230.1020.2	90.230.1040.2
Marking of poles:	3	90.230.3020.2	90.230.3040.2
Application:			
Cable color:		☐ white	☐ white
Color of coding:	1	90.210.1020.2	90.210.1040.2
Marking of poles:	2	90.210.2020.2	
Application:	2.5	90.210.2520.2	
	3	90.210.3020.2	90.210.3040.2
	5	90.210.5020.2	
Cable color:		☐ white	
Color of coding:	1	90.200.1020.2	
Marking of poles:	3	90.200.3020.2	
Application:			
Cable color:		☐ white	
Color of coding:	1	90.220.1020.2	
Marking of poles:	3	90.220.3020.2	
Application:			

Connection cable, female - free end


		H03V2V2H2-F halogenated Part No.	H03Z1Z1H2-F halogen free Part No.
	Length (m)		
Cable color:		☐ white	
Color of coding:	0.5	90.230.0523.2	
Marking of poles:			
Application:			
Cable color:		☐ white	☐ white
Color of coding:	0.15	99.415.0000.8	
Marking of poles:	0.5	90.210.0523.2	90.210.0543.2
Application:	1	90.210.1023.2	
	2	90.210.2023.2	
	5	90.210.5023.2	
Cable color:		☐ white	
Color of coding:	0.5	90.200.0523.2	
Marking of poles:	3	90.200.3023.2	
Application:			
Cable color:		☐ white	
Color of coding:	0.5	90.220.0523.2	
Marking of poles:			
Application:			

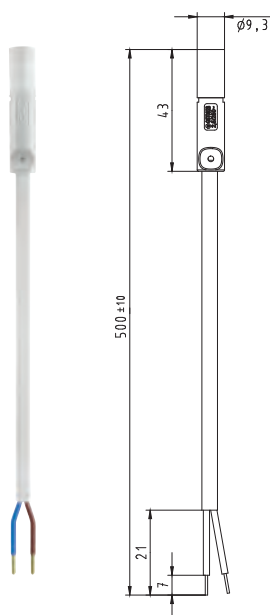

Cable assemblies, 2-pole

0.75 mm², 2.5 A

Rated voltage:	250V	Lockable:	No
Rated current:	2.5 A	Preparation of conductor ends:	Cable end sleeve
Degree of protection (IP):	IP20		

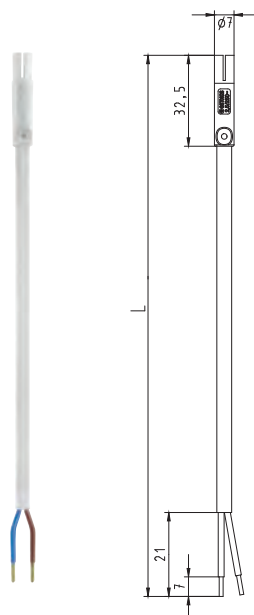


Connection cable, male - free end

		H03V2V2H2-F halogenated		H03Z1Z1H2-F halogen free	
		Part No.		Part No.	
		Length (m)			
Cable color:		☐ white		☐ white	
Color of coding:	☐ white	90.230.0524.2		90.230.0544.2	
Marking of poles:	L, N	0.5			
Application:	Protection class II 250 V	2	90.230.2024.2		
Cable color:		☐ white		☐ white	
Color of coding:	☒ green	0.15	99.428.0000.8		
Marking of poles:	+, -	0.5	90.210.0524.2	90.210.0544.2	
Application:	Extra-low voltage parallel	1	90.210.1024.2		
		2.5	90.210.2524.2		
		5	90.210.5024.2		
Cable color:		☐ white			
Color of coding:	☒ light blue	0.5	90.200.0524.2		
Marking of poles:	1, 2	1	90.200.1024.2		
Application:	Extra-low voltage parallel				
Cable color:		☐ white			
Color of coding:	☒ yellow	0.5	90.220.0524.2		
Marking of poles:	+, -				
Application:	Extra-low voltage series				

Distribution block,3-pole

0.75 mm², 6 A			
Rated voltage:	250 V	Cable diameter:	5.5 mm
Rated current:	6 A	Lockable:	No
Degree of protection:	IP20, IP40 when plugged		

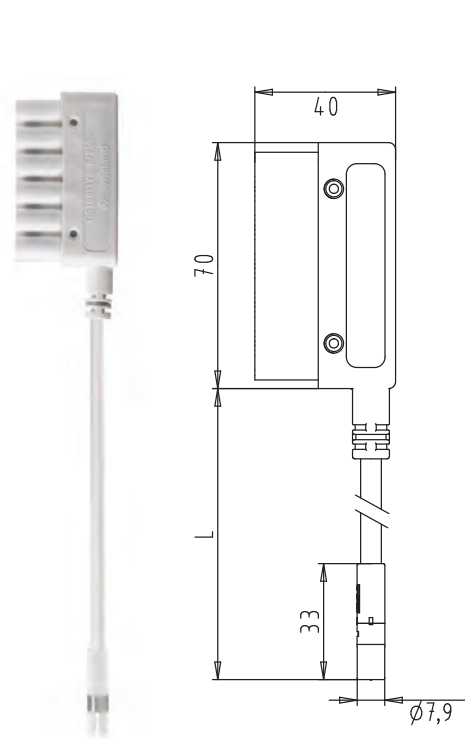

Distribution block with extension cable, 3-pole

H03VV-F
halogenated
Part No.


Length (m)

Cable color:			
Color of coding:	☐ white	0.5	☐ white
Pole marking:	L, N, PE		90.240.0506.2
Application:	250 V/6 A		
Outputs:	6		

Accessories

Housing installation frame for GST08i3, 3-pole

Part No.
99.451.0000.8

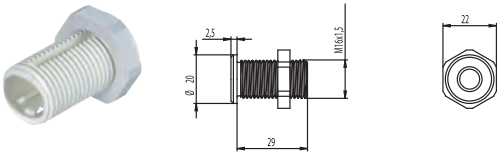

Installation frame incl. fixation screws

Cable assemblies, 3-pole

0.75 mm², 6 A

Rated voltage:

250V

Degree of protection (IP):

IP20

Rated current:

6 A

Lockable:


No

Connecting cable, female - male

H03VV-F
halogenated
Part No.

Length (m)

Cable color:	☐ white	1	☐ white
Color of coding:			90.240.1000.2
Marking of poles:	L, N, PE	3	90.240.3000.2
Application:	Mains 250 V		

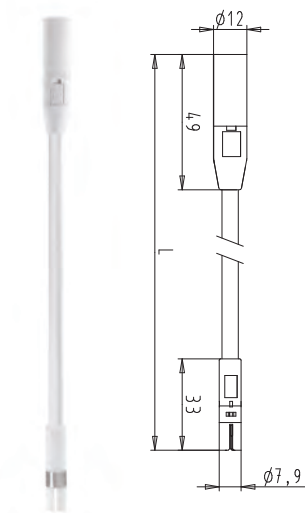

Cable assemblies, 3-pole

0.75 mm², 6 A

Rated voltage:

250V

Rated current:

6 A

Degree of protection (IP):

IP20

Lockable:

No

Preparation of conductor ends:

Cable end sleeve



Connection cable, female - free end

H03VV-F
halogenated

Length (m)

Part No.

Cable color:

Color of coding:

Marking of poles:

Application:


☐ white

L, N, PE

Mains 250 V

0.5

90.240.0503.2

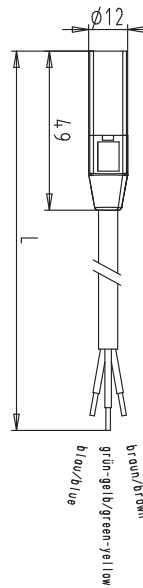



Connection cable, male - free end

H03VV-F
halogenated

Length (m)

Part No.

Cable color:

Color of coding:

Marking of poles:

Application:


☐ white

L, N, PE

Mains 250 V


0.5

90.240.0504.2

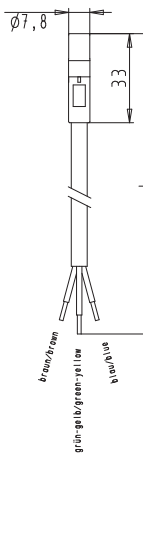

Cable assemblies, 3-pole

0.75 mm², 6 A			
Rated voltage:	250V	Pollution degree:	2
Rated current:	6 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	4 kV

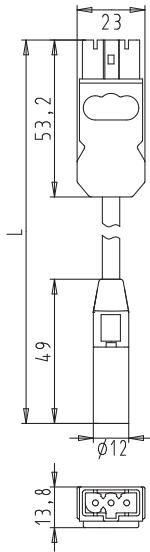

Adapter cable, GST15i3 male – GST08i3 female

		H03VV-F halogenated Part No.
		Length (m)
Cable color:	0.5	☐ white
Color of coding:		90.240.0505.2
Marking of poles:	☐ white	
Application:	L, N, PE	
	Mains 250 V	

Low-voltage technology draws attention!


The versatile **BST** system allows the pluggable installation even of signal applications. Mechanical coding and clear assignment with different colors facilitate the installation: green for KNX and SELV applications, black for general signal or LON applications, and blue for SELV applications.




Complex installations can be completed with just four basic components – from the distribution panel unit to any point of use. Connectors can be assembled on site and serve, for instance, for the supply of the **gesis**[®] system. The connectors come as male and female connectors complete with strain relief and can be used to connect any current type of cable.

e-
Shop

More information

<http://eshop.wieland-electric.com>

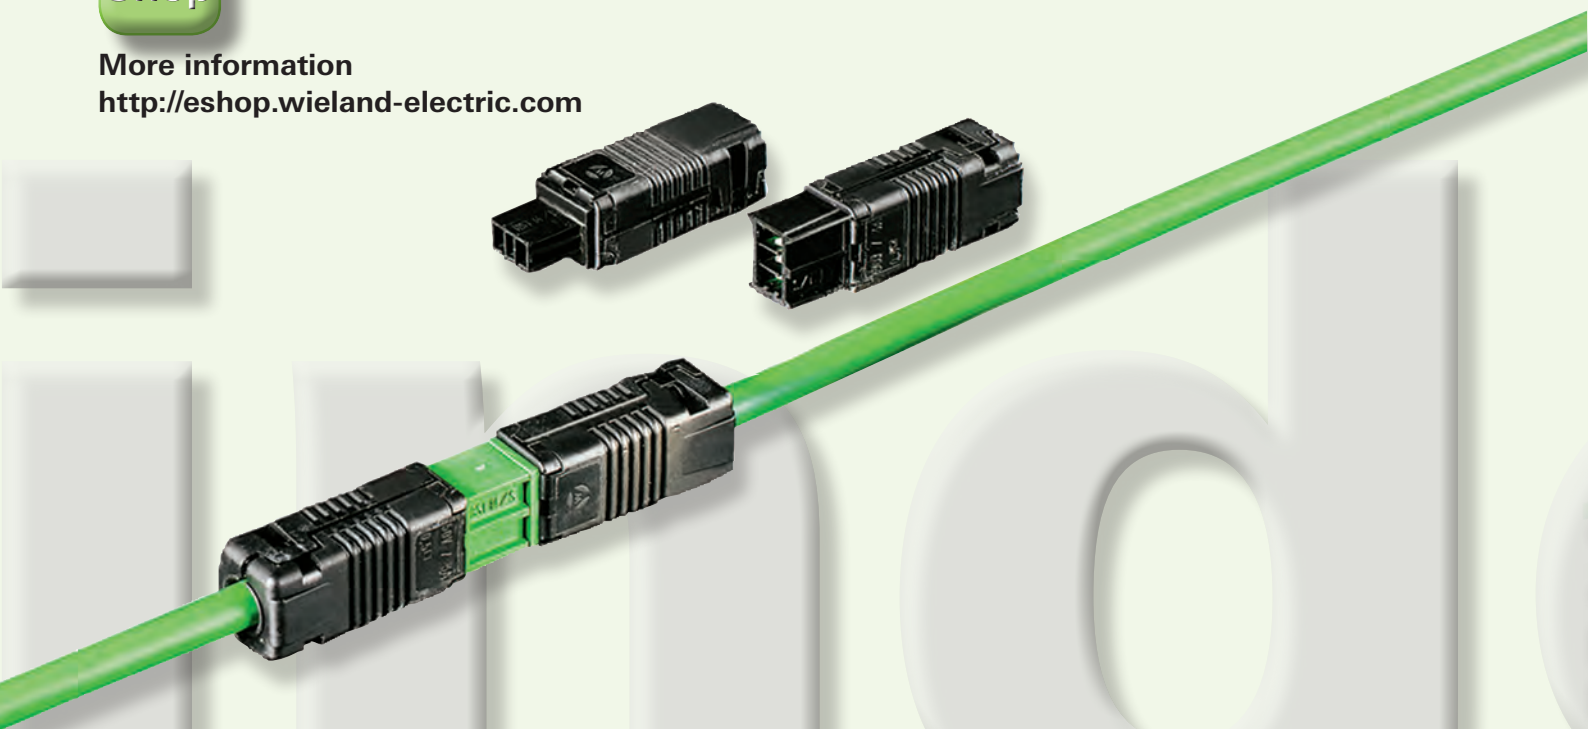

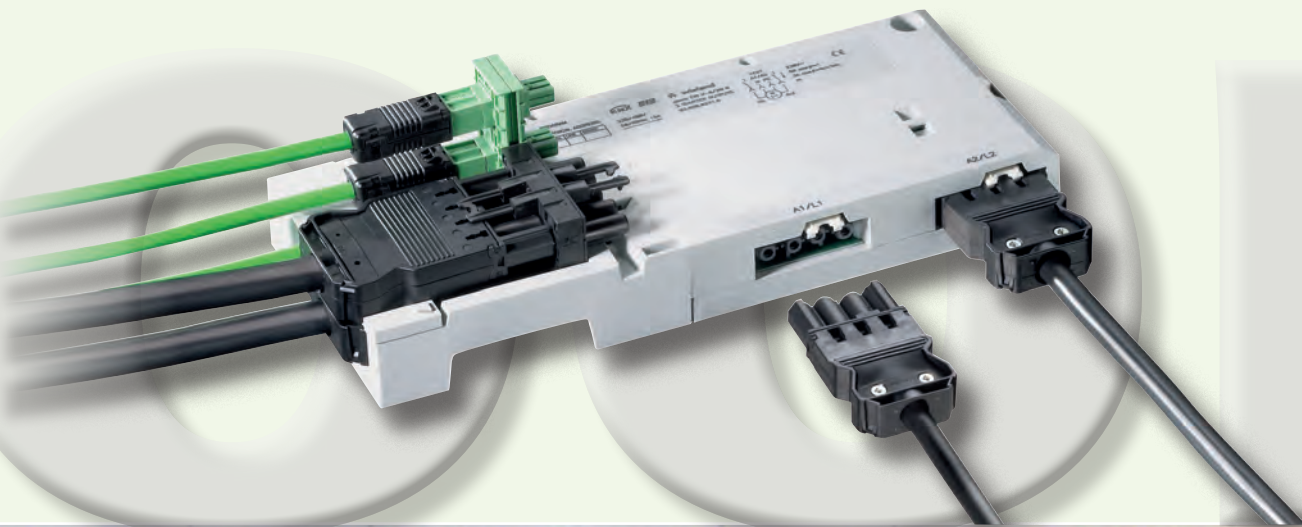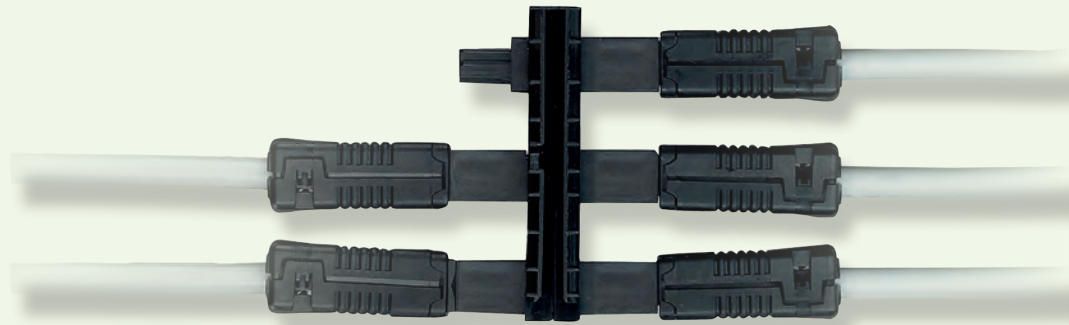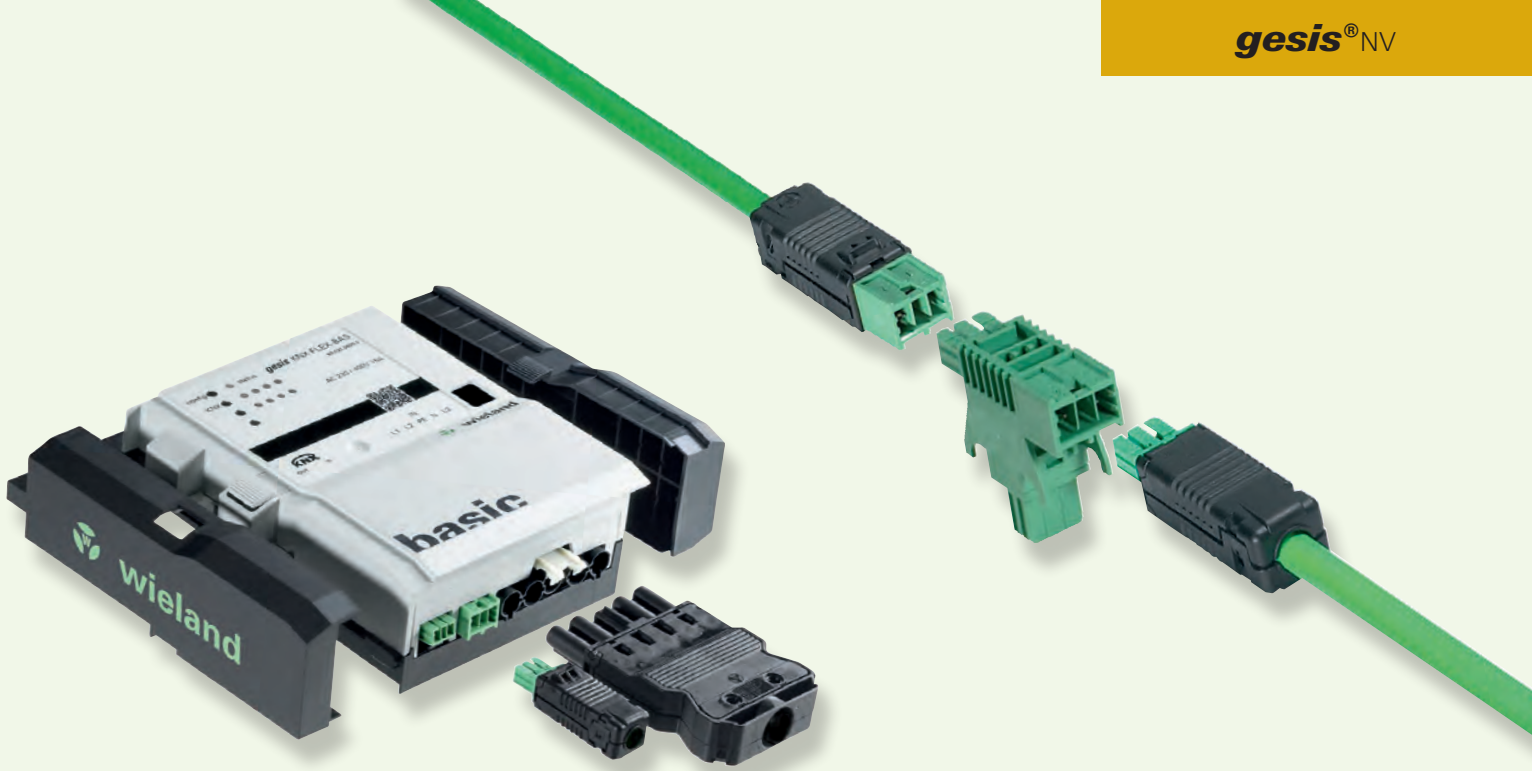


Connector, 2-pole

Spring force

Rated voltage:	50V	Lockable:	Yes
Rated current:	3 A	Cross section solid:	0,25 - 0,75mm ²
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV
Pollution degree:	2	Housing material:	Polyamide
Terminations per pole:	1	for insulation and sheath strip lengths please see technical data	

female

male



For cables Ø 5.5 - 6.5 mm


For cables Ø 5.5 - 6.5 mm			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ green	SELV (KNX)	1+, 2-	93.421.0553.1	93.422.0553.1
■ pastel blue	SELV	1+, 2-	93.421.4553.1	93.422.4553.1

Device connectors, 2-pole


Snap-in, Spring force

Rated voltage:	50V	Lockable:	Yes
Rated current:	3 A	Cross section solid:	0,25 - 0,75mm²
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV
Pollution degree:	2	Housing material:	Polyamide
Terminations per pole:	1		

female



male




Housing material thickness 0.5-1.5 mm

Housing material thickness 0.5-1.5 mm			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
green	SELV (KNX)	1+, 2-	93.421.0353.1	93.422.0353.1
 pastel blue	SELV	1+, 2-	93.421.4353.1	93.422.4353.1

Solder connector, Soldering connection

Rated voltage:	50V	Terminations per pole:	1
Rated current:	3 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV
Pollution degree:	2	Housing material:	Polyamide

female



male





horizontal, without fastening flange

horizontal, without fastening flange			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ green	SELV (KNX)	1+, 2-	93.421.0653.1	93.422.0653.1
■ pastel blue	SELV	1+, 2-	93.421.4653.1	93.422.4653.1

Distribution units


Rated voltage: 50 V
 Rated current: 3 A
 Rated impulse voltage: 0.8 kV

Degree of protection (IP): IP20
 Approvals: 
 Lockable: Yes






H distributor, 2-pole without mounting option

Color of coding	Application	Outputs	Part No.
■ green	SELV (KNX)	3	93.420.0453.0






HH distributor, 2-pole without mounting option

Color of coding	Application	Outputs	Part No.
■ green	SELV (KNX)	5	93.420.0053.0



T distributor, 2-pole with mounting option

Color of coding	Application	Outputs	Part No.
■ green	SELV (KNX)	2	93.420.0653.0
■ pastel blue	SELV	2	93.420.4653.0



TT distributor, 2-pole with integrated connection terminal

Color of coding	Application	Outputs	Part No.
■ pastel blue	SELV	1	93.420.4553.0

Cable assemblies, 2-pole

0.5 mm², 3 A

Rated voltage: 50V
 Rated current: 3 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 0.8 kV



Connecting cable, female - male

	Length (m)	FB-2Y(ST)Y 2x2x0,8 halogenated	FB-H(ST) 2x2x0,8 halogen free	L03VV-U halogenated
		Part No.	Part No.	Part No.
Cable color:		■ green	■ green	
Color of coding:		■ green		
Marking of poles:		1+, 2-		
Application:		KNX		
	1	94.425.1000.7	94.425.1060.7	
	2	94.425.2000.7	94.425.2060.7	
	3	94.425.3000.7	94.425.3060.7	
	4	94.425.4000.7	94.425.4060.7	
	5	94.425.5000.7	94.425.5060.7	
	6	94.425.6000.7	94.425.6060.7	
	7	94.425.7000.7	94.425.7060.7	
	8	94.425.8000.7	94.425.8060.7	
Cable color:		gray	■ green	■ black
Color of coding:				
Marking of poles:				
Application:				
	1	94.425.1000.9		94.425.1030.9
	2	94.425.2000.9		94.425.2030.9
	3	94.425.3000.9	94.425.3060.9	94.425.3030.9
	4	94.425.4000.9		94.425.4030.9
	5	94.425.5000.9	94.425.5060.9	94.425.5030.9
	6	94.425.6000.9		94.425.6030.9
	7	94.425.7000.9		94.425.7030.9
	8	94.425.8000.9		94.425.8030.9

gesis® NV

Connecting cable, female - male


	Length (m)	L03Z1Z1-U halogen free
		Part No.
Cable color:		■ black
Color of coding:		
Marking of poles:		
Application:		
	1	94.425.1090.9
	2	94.425.2090.9
	3	94.425.3090.9
	4	94.425.4090.9
	5	94.425.5090.9
	6	94.425.6090.9
	7	94.425.7090.9
	8	94.425.8090.9



Cable assemblies, 2-pole

0.5 mm², 3 A

Rated voltage:	50V	Pollution degree:	2
Rated current:	3 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV

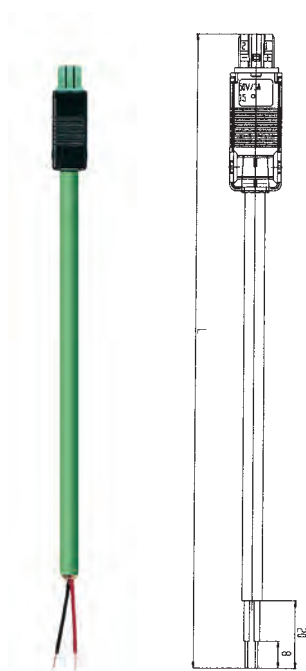


Connection cable, female - free end

	Length (m)	FB-2Y(ST)Y 2x2x0,8 halogenated	FB-H(ST) 2x2x0,8 halogen free	L03VV-U halogenated
		Part No.	Part No.	Part No.
Cable color:		■ green	■ green	
Color of coding:		■ green		
Marking of poles:		1+, 2-		
Application:		KNX		
	1	94.425.1003.7	94.425.1063.7	
	2	94.425.2003.7	94.425.2063.7	
	3	94.425.3003.7	94.425.3063.7	
	4	94.425.4003.7	94.425.4063.7	
	5	94.425.5003.7	94.425.5063.7	
	6	94.425.6003.7	94.425.6063.7	
	7	94.425.7003.7		
	8	94.425.8003.7	94.425.8063.7	
Cable color:		■ gray	■ green	■ black
Color of coding:		■ pastel blue		
Marking of poles:		+, -		
Application:		SELV		
	1	94.425.1003.9		94.425.1033.9
	2	94.425.2003.9		94.425.2033.9
	3	94.425.3003.9	94.425.3063.9	94.425.3033.9
	4	94.425.4003.9		94.425.4033.9
	5	94.425.5003.9		94.425.5033.9
	6	94.425.6003.9		94.425.6033.9
	7	94.425.7003.9		
	8	94.425.8003.9		94.425.8033.9

Cable assemblies, 2-pole

0.5 mm², 3 A			
Rated voltage:	50V	Pollution degree:	2
Rated current:	3 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV

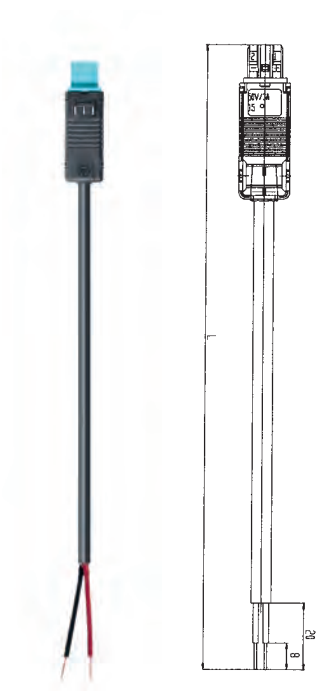


Connection cable, female - free end		L03Z1Z1-U	
		halogen free	
		Length (m)	Part No.
Cable color:	■ black	1	94.425.1093.9
Color of coding:	■ pastel blue	2	94.425.2093.9
Marking of poles:	1+, 2-	3	94.425.3093.9
Application:	SELV	5	94.425.5093.9
		6	94.425.6093.9
		7	94.425.7093.9
		8	94.425.8093.9

Cable assemblies, 2-pole

0.5 mm², 3 A

Rated voltage: 50V
 Rated current: 3 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 0.8 kV

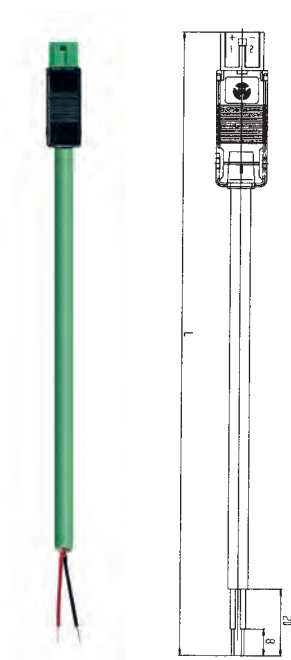

Connection cable, male - free end

		FB-2Y(ST)Y 2x2x0,8 halogenated	FB-H(ST) 2x2x0,8 halogen free	L03VV-U halogenated
		Length (m)	Part No.	Part No.
Cable color: ■ green Color of coding: 1+, 2- Marking of poles: KNX Application:	1	94.425.1004.7	94.425.1064.7	
	2	94.425.2004.7	94.425.2064.7	
	3	94.425.3004.7	94.425.3064.7	
	4	94.425.4004.7	94.425.4064.7	
	5	94.425.5004.7	94.425.5064.7	
	6	94.425.6004.7	94.425.6064.7	
	7	94.425.7004.7	94.425.7064.7	
	8	94.425.8004.7	94.425.8064.7	
Cable color: ■ pastel blue Color of coding: +, - Marking of poles: SELV Application:	1	94.425.1004.9		94.425.1034.9
	2	94.425.2004.9		94.425.2034.9
	3	94.425.3004.9		94.425.3034.9
	4	94.425.4004.9		94.425.4034.9
	5	94.425.5004.9		94.425.5034.9
	6			94.425.6034.9
	7			94.425.7034.9
	8			94.425.8034.9

Cable assemblies, 2-pole

0.5 mm², 3 A

Rated voltage:

Rated current:

Degree of protection (IP):


50V
3 A
IP20

Pollution degree:

Lockable:

Rated impulse voltage:

2
Yes
0.8 kV

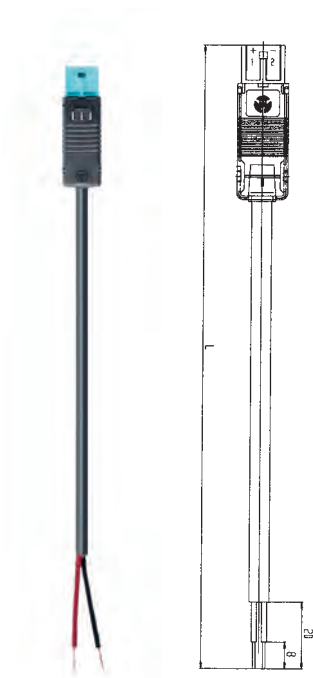

Connection cable, male - free end		L03Z1Z1-U	
		halogen free	
		Length (m)	Part No.
Cable color:			■ black
Color of coding:	■ pastel blue	1	94.425.1094.9
Marking of poles:	1+, 2-	2	94.425.2094.9
Application:	SELV	3	94.425.3094.9
		4	94.425.4094.9
		5	94.425.5094.9
		6	94.425.6094.9
		7	94.425.7094.9
		8	94.425.8094.9

Connector, 3-pole

Spring force			
Rated voltage:	50V	Lockable:	Yes
Rated current:	3 A	Cross section solid:	0,25 - 0,75mm²
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV
Pollution degree:	2	Housing material:	Polyamide
Terminations per pole:	1	for insulation and sheath strip lengths please see technical data	

female



male



For cables Ø 5.5 - 6.5 mm			female	male
Color of coding	Application	Marking of poles	Part No.	Part No.
■ black	Extra-low voltage parallel	1+, 2-	93.431.2553.1	93.432.2553.1
□ white	Extra-low voltage parallel	1+, 2-	93.431.2553.0	93.432.2553.0


Device connectors, 3-pole

Snap-in, Spring force

Rated voltage:	50V	Lockable:	Yes
Rated current:	3 A	Cross section solid:	0,25 - 0,75mm²
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV
Pollution degree:	2	Housing material:	Polyamide
Terminations per pole:	1		

female

male

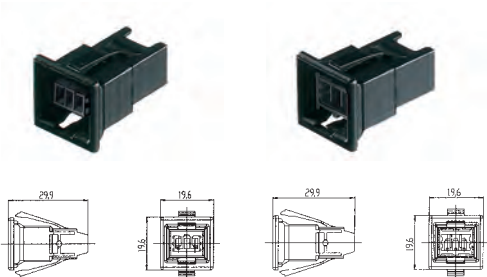

Housing material thickness 0.5-1.5 mm


Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Extra-low voltage parallel	1+, 2-	93.431.2353.1	93.432.2353.1
□ white	Extra-low voltage parallel	1+, 2-	93.431.2353.0	93.432.2353.0

Solder connector, Soldering connection

Rated voltage:	50V	Terminations per pole:	1
Rated current:	3 A	Lockable:	Yes
Degree of protection (IP):	IP20	Rated impulse voltage:	0.8 kV
Pollution degree:	2	Housing material:	Polyamide

female

male


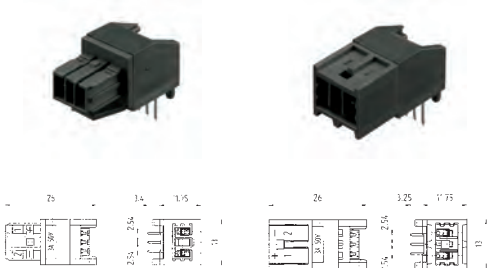


horizontal, without fastening flange

Color of coding	Application	Marking of poles	female Part No.	male Part No.
■ black	Extra-low voltage parallel	1+, 2-	93.431.2653.1	93.432.2653.1
□ white	Extra-low voltage parallel	1+, 2-	93.431.2653.0	93.432.2653.0




Distribution units

Rated voltage:	50 V	Degree of protection (IP):	IP20
Rated current:	3 A	Approvals:	
Rated impulse voltage:	0.8 kV	Lockable:	Yes






H distributor, 3-pole without mounting option

Color of coding	Application	Outputs	Part No.
☐ white	SELV/PELV	3	93.430.2453.0
☒ black	SELV/PELV	3	93.430.2453.1




HH distributor, 3-pole without mounting option

Color of coding	Application	Outputs	Part No.
☐ white	SELV/PELV	5	93.430.2053.0
☒ black	SELV/PELV	5	93.430.2053.1



T distributor, 3-pole with mounting option

Color of coding	Application	Outputs	Part No.
☐ white	SELV/PELV	2	93.430.2653.0
☒ black	SELV/PELV	2	93.430.2653.1



Cable assemblies, 3-pole

0.5 mm², 3 A

Rated voltage:

50V

Rated current:

3 A

Degree of protection (IP):

IP20

Pollution degree:


2

Lockable:

Yes

Rated impulse voltage:

0.8 kV

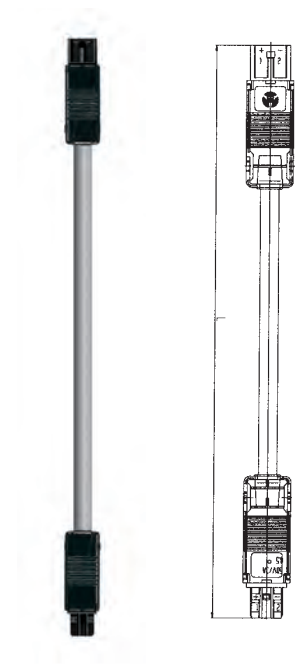

Connecting cable, female - male

		FB-2Y(ST)Y 2x2x0,8 halogenated	FB-H(ST) 2x2x0,8 halogen free
		Part No.	Part No.
Length (m)			
Cable color: Color of coding: Marking of poles: Application:	■ black 1+, 2- Extra-low voltage parallel	gray	green
		1 94.435.1000.1	94.435.1060.1
		2 94.435.2000.1	94.435.2060.1
		3 94.435.3000.1	94.435.3060.1
		4 94.435.4000.1	94.435.4060.1
		5 94.435.5000.1	94.435.5060.1
		6 94.435.6000.1	94.435.6060.1
		7 94.435.7000.1	94.435.7060.1
		8 94.435.8000.1	94.435.8060.1

Cable assemblies, 3-pole

0.5 mm², 3 A

Rated voltage: 50V
 Rated current: 3 A
 Degree of protection (IP): IP20

Pollution degree: 2
 Lockable: Yes
 Rated impulse voltage: 0.8 kV


Connection cable, female - free end

FB-2Y(ST)Y 2x2x0,8

halogenated

Length (m) Part No.

Cable color:	■ black	1	94.435.1003.1
Color of coding:	■ black	2	94.435.2003.1
Marking of poles:	1+, 2-	3	94.435.3003.1
Application:	Extra-low voltage parallel	4	94.435.4003.1
		5	94.435.5003.1
		6	94.435.6003.1

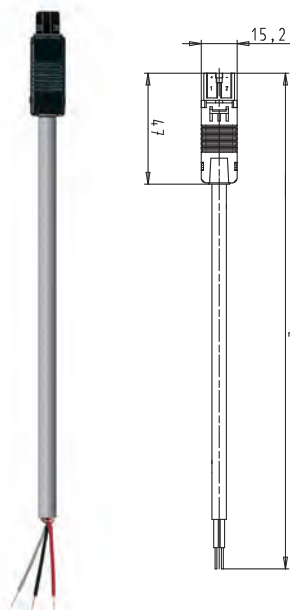

Connection cable, male - free end

FB-2Y(ST)Y 2x2x0,8


halogenated

FB-H(ST) 2x2x0,8

halogen free


Length (m) Part No.

Cable color:	■ black	1	94.435.1004.1	■ green	94.435.1064.1
Color of coding:	■ black	2	94.435.2004.1	■ green	94.435.2064.1
Marking of poles:	1+, 2-	3	94.435.3004.1	■ green	94.435.3064.1
Application:	Extra-low voltage parallel	4	94.435.4004.1	■ green	94.435.4064.1
		5	94.435.5004.1		
		6	94.435.6004.1	■ green	94.435.6064.1
		7	94.435.7004.1		
		8	94.435.8004.1	■ green	94.435.8064.1

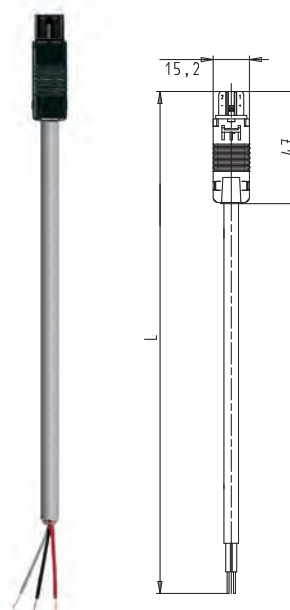


BST covers

for female connectors
BST



for male connectors
BST



2/3-pole for covering open contacts


Color
■ black

for female connectors	for male connectors
Part No.	Part No.
05.563.7753.0	05.563.7853.0

PC board connectors


Fine-stranded wire cross-section: 0.22 – 0.35 mm²
 Rated voltage: 32 V
 Rated current: 3.0 A

Dielectric strength: 1.4 kV
 Approvals: 
 Distribution unit, configuration: on PC board

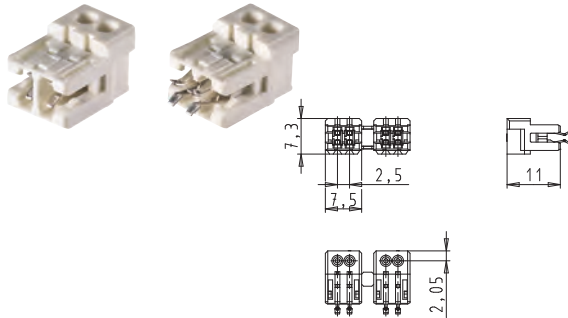


Female connector, 2-pole

Color of coding	Coding bridge	Part No.
☐ white	without	93.572.0053.0
☐ white	with	93.572.0153.0

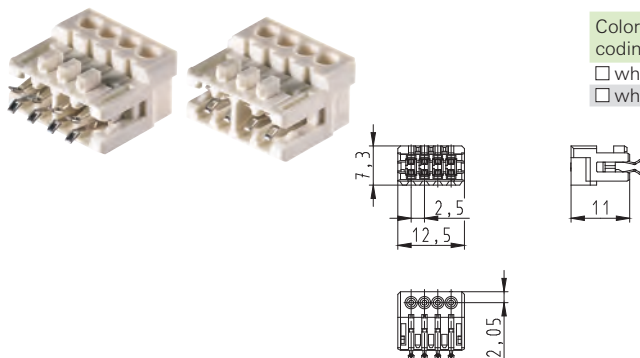

Female connector, 4-pole

Color of coding	Coding bridge	Part No.
☐ white	without	93.574.0053.0
☐ white	with	93.574.0153.0

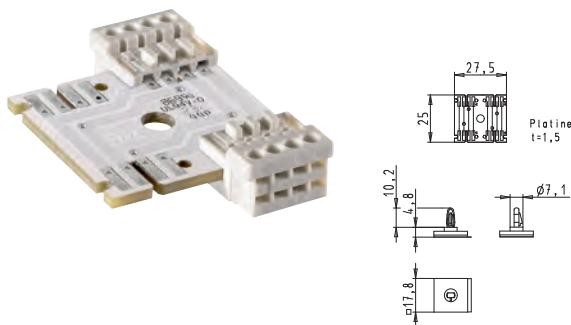

4-pole PCB distributor

Color of coding	Part No.
☐ white	Z6.560.5353.0



Assembly tool, 2/4-pole

Color	Part No.
Assembly tool	95.101.2400.0

Cable assemblies


Fine-stranded wire cross-section:	0.22 – 0.35 mm ² acc. to customer requirements	Rated impulse voltage:	1.4 kV
Rated voltage:	32 V	Approvals:	 
Rated current:	3.0 A	Delivery:	cable sets



Extension cables, plug connectors
2-pole

Length (m)	Part No.
------------	----------

Cable color:	☐ white	☐ white
Color of coding:		on request

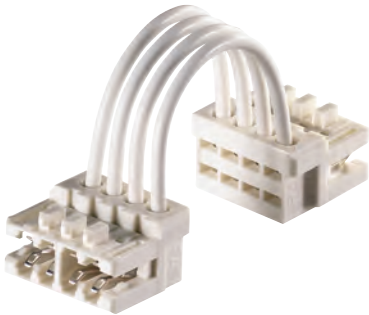

Extension cables, plug connectors
4-pole

Length (m)	Part No.
------------	----------

Cable color:	☐ white	☐ white
Color of coding:		on request

The flexible busbar

Space-saving and safe

Feed-in 6 mm²

The feed module is suitable for supply with NYM cables with a cross-section of up to 5x6 mm². The robust strain relief is directly integrated.

Feed-in 2-pole bus

SELV (eg. KNX) or SIGNAL (not SELV) can be applied via a separate supply.

Flat cable, 5-pole, 2.5 and 4 mm²

2 cable cross sections, 3 colors, 2 applications combined in one cable geometry.

Flat cable 5+2-pole, 2.5 and 4 mm²

2 cable cross sections, 2 colors, 3 applications combined in one cable geometry.

Variable phase pre-selection for GST18i3

Before contacting, the phase for the supply of the 3-pole GST18i3 output can be selected with a phase selector.

And it is still possible to change the phase subsequently: Just loosen the contact screw, push the slider to the new position and make a new contact. The adapter does not need to be moved – a significant advantage of the system.

Parallel tapping

The cables to the supply and to all tapping points are routed in parallel to the flat cable. With this, the new **gesis®**NRG generation saves considerable installation space.




More information

<http://eshop.wieland-electric.com>



Mounting option in bottom part

The bottom part is provided with 4 mounting holes for mounting the components on walls, ceilings, or cable ducts.

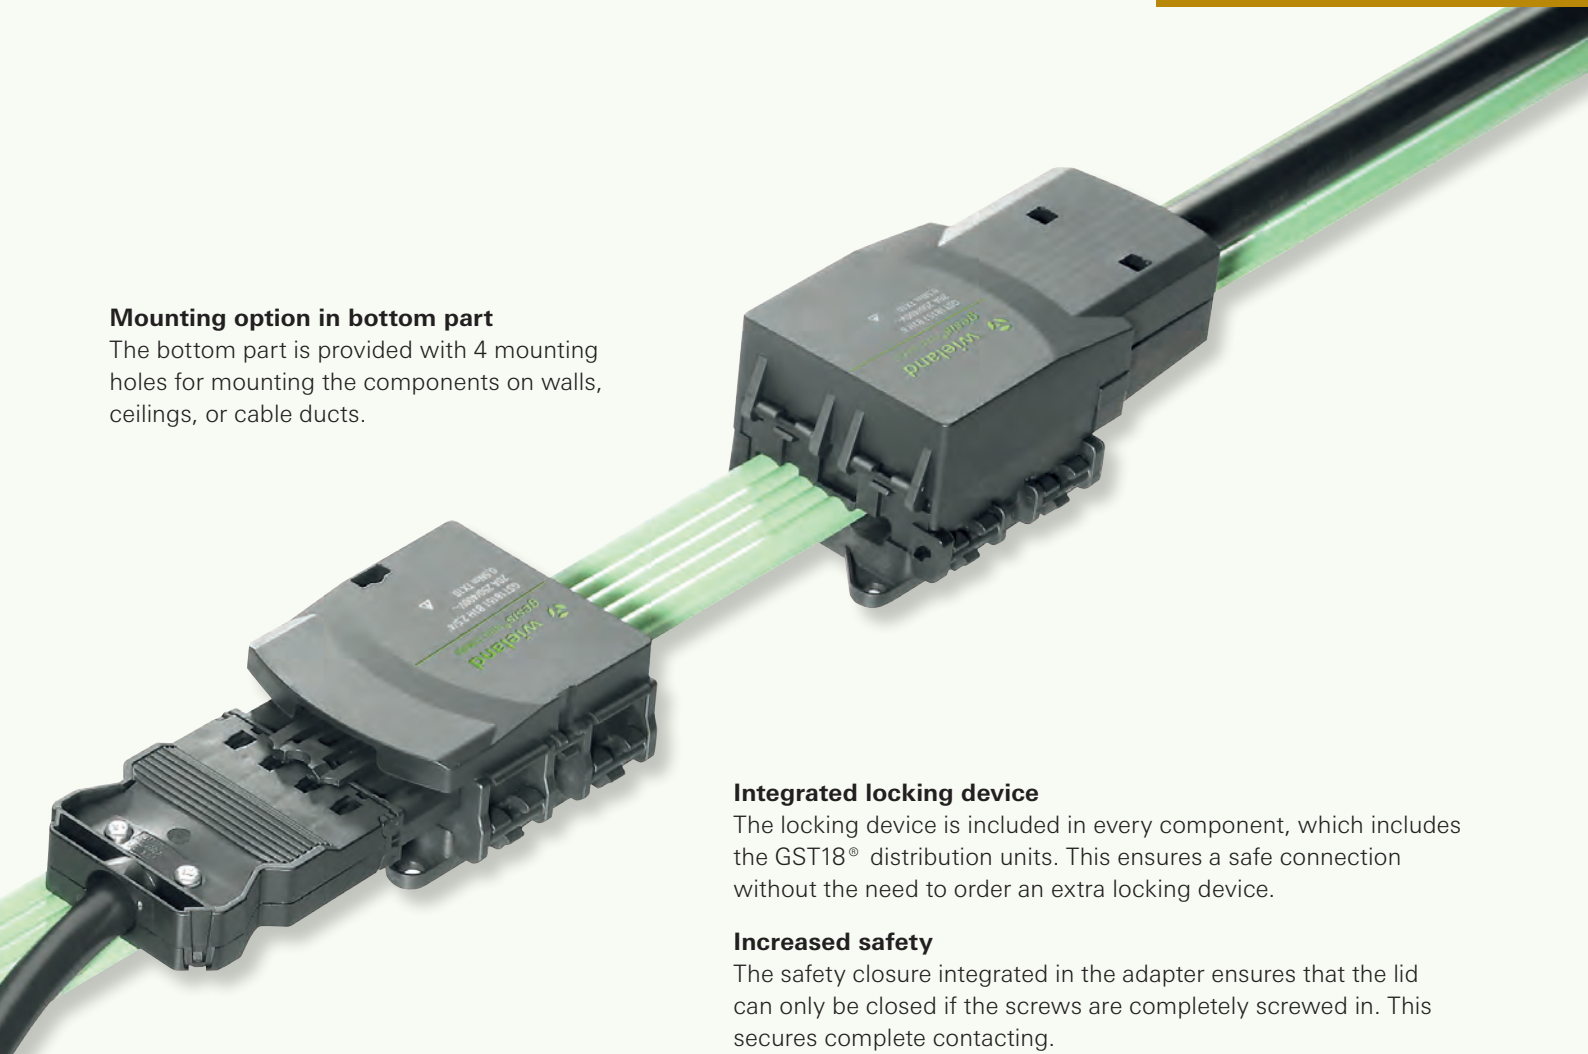

Integrated locking device

The locking device is included in every component, which includes the GST18® distribution units. This ensures a safe connection without the need to order an extra locking device.

Increased safety

The safety closure integrated in the adapter ensures that the lid can only be closed if the screws are completely screwed in. This secures complete contacting.

Inspection window for phase selection

The transparent inspection window lets you check which one of the 3 phases is connected to the GST18i3 line even when the lid is closed.



DESIGN PLUS

powered by: **light+building**



Flat cable, 5-pole

2.5 mm² and 4 mm², 20 A

Rated voltage:	250 V/400 V
Rated current:	20 A
Degree of protection (IP):	IP20
Connection technique:	insulation piercing
Lockable:	yes

Mechanically coded:	yes
Output:	pluggable, parallel to line direction
Approval:	
Bending radius:	static, approx. 60 mm
Observe the installation instructions in the technical data.	

Flat cable 2.5 mm² 5G2.5

PVC

halogenated	halogen free
Part No.	Part No.

Cable color:	■ green	00.712.0303.7	00.710.0303.7
Application:	Mains		
Cable color:	■ black	00.712.0303.1	00.710.0303.1
Application:	Mains		
Cable color:	■ pastel blue	00.712.0303.6	00.710.0303.6
Application:	Mains + AC 250 V signal		

Flat cable 4 mm² 5G4

PVC

halogenated	halogen-free
Part No.	Part No.

Cable color:	■ green	00.710.0304.7
Application:	Mains	
Cable color:	■ black	00.710.0304.1
Application:	Mains	
Cable color:	■ pastel blue	00.710.0304.6
Application:	Mains + AC 250 V signal	

Indicate cutting length (max. 350 m)

Other cable colors on request

Functional safety can only be guaranteed, if the original cable is used. For more information see Technical Data.

Tapping flat cable adapter, 3-pole with phase pre-selection, direct routing to GST18i3

Female conn. GST18i3

Color of coding:	■ black	92.031.5453.1
Pole marking:	L, PE, N	
Application:	Mains	

Tapping flat cable adapter, 5-pole direct routing to GST18i5

Female conn. GST18i5

Color of coding:	■ black	92.051.5453.1
Pole marking:	3, N, PE, 2, 1	
Application:	Mains	
Color of coding:	■ pastel blue	92.051.5553.0
Pole marking:	D2, D1, PE, N, L	
Application:	Mains + AC 250 V signal	

Feed-in mains

for round cables 12-16 mm, screw connection

Feed-in mains

Part No.

Conn. cross section:	6 mm ² (r), 4 mm ² (f)	92.050.1553.1
Application:	Mains	


Feed-in mains + dimming

for round cables 12-16 mm, screw connection

Feed-in

Part No.

Conn. cross section:	6 mm ² (r), 4 mm ² (f)	92.050.1653.0
Application:	Mains + AC 250 V signal	

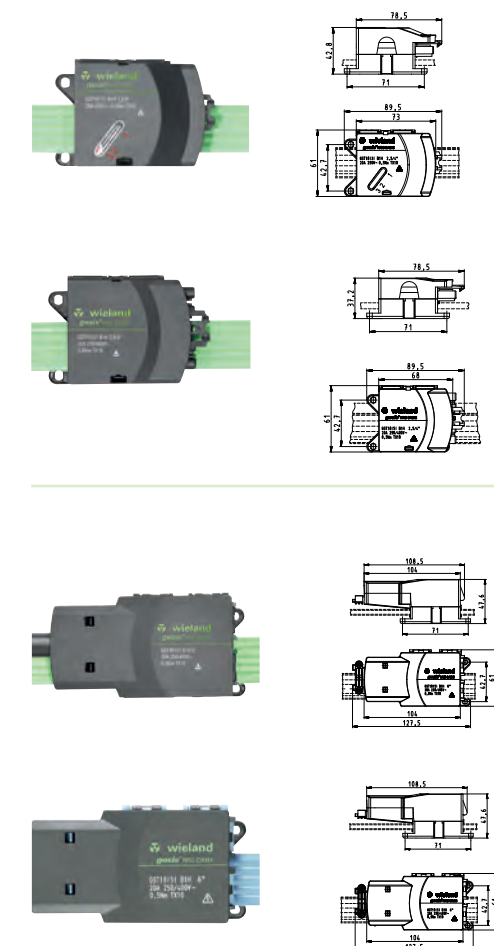

Flat cable, 5+2-pole

5x2.5/4 mm², 2x1.5 mm²


Voltage category:	5x 2.5/4 mm ² mains: 250/400V; 2x1.5 mm ² black: not SELV; 2x1.5 mm ² green: SELV	Connection technique:	insulation piercing
Rated current:	Mains 2.5/4 mm ² : 20 A; SIGNAL 1.5 mm ² : 6 A; SELV 1.5 mm ² : 3 A	Lockable:	yes
Degree of protection (IP):	IP20	Output:	pluggable, parallel to line direction
		BASIC+SIGNAL:	VDE requested
		BASIC+KNX:	VDE- and KNX requested
		Bending radius:	static, approx. 60 mm
Observe the installation instructions in the technical data.			



Flat cable 5x2.5 mm² + 2x1.5 mm²

PVC	
halogenated	halogen free
Part No.	Part No.


Cable color:	■ black	00.712.1323.1	00.710.1323.1
Application:	Mains + SIGNAL (not SELV)		
Cable color:	■ green	00.712.0323.7	00.710.0323.7
Application:	Mains + SELV		



Flat cable 5x4 mm² + 2x1.5 mm²

PVC	
halogenated	halogen-free
Part No.	Part No.


Cable color:	■ black	00.710.1324.1
Application:	Mains + SIGNAL (not SELV)	
Cable color:	■ green	00.710.0324.7
Application:	Mains + SELV	



Indicate cutting length (max. 350 m)

Cable width approx. 36.9 mm, cable height approx. 6.3 mm.

Functional safety can only be guaranteed, if the original cable is used. For more information see Technical Data.



Tapping SELV, 2-pole Flat cable adapter direct routing to BST14i2

**Female conn.
BST14i2**
Part No.


Color of coding:	■ black/green	93.421.5453.0
Pole marking:	1+, 2-	
Application:	SELV (e.g. KNX)	



Tapping SIGNAL, 2-pole Flat cable adapter direct routing to GST15i2

**Female conn.
GST15i2**
Part No.

Color of coding:	■ pastel blue	91.021.5453.0
Pole marking:	D1, D2	
Application:	not SELV (e.g. DALI)	



Feed-in SELV for round cables, 5.9 – 7.5 mm, screw connection

Feed-in
Part No.

Conn. cross section:	0.5 up to 1.5 mm ²	93.420.5453.0
Application:	SELV (e.g. KNX)	



Feed-in SIGNAL for round cables, 5.9 – 7.5 mm, screw connection

Feed-in
Part No.


Conn. cross section:	0.5 up to 1.5 mm ²	91.020.5453.0
Application:	not SELV (e.g. DALI)	

Adapter mains, 5+2-pole

Rated voltage 2.5/4 mm ² :	250/400V
Rated current:	20 A
Degree of protection (IP):	IP20
Connection technique:	insulation piercing
Lockable:	yes

Outputs: pluggable, parallel to line direction

Adapters are supplied without cable.
Observe the installation instructions in the technical data.




Tapping flat cable adapter, 3-pole with phase pre-selection, direct routing to GST18i3

**Female conn.
GST18i3**
Part No.

Color of coding:	■ black
Pole marking:	L, PE, N
Application:	Mains

92.031.5453.1




Tapping flat cable adapter, 5-pole direct routing to GST18i5

**Female conn.
GST18i5**
Part No.

Color of coding:	■ black
Pole marking:	3, N, PE, 2, 1
Application:	Mains

92.051.5453.1



Feed-in mains

for round cables 12-16 mm,
screw connection

Feed-in

Part No.

Conn. cross section:	6 mm ² (r), 4 mm ² (f)
Application:	Mains

92.050.1553.1

Combi adapter

3-pole mains+2-pole signal, 5+2-pole BASIC+SIGNAL

Protection rating (IP):	IP20
Connection technique:	insulation piercing
Locking device:	integrated
Outputs:	pluggable, parallel to line direction

Tapping flat cable mains+signal, 5-pole

Combi flat cable adapter

Part No.

Application:	Mains + not SELV
--------------	------------------

99.418.9999.8

Accessories for flat cables, 5- and 5+2-pole, 2.5/4 mm², 2x1.5 mm²

Degree of protection (IP):

IP20

Functional safety can only be guaranteed, if the original cable is used.
For more information see Technical Data.



Cable cutter for flat cables

Cable cutter

Part No.

95.300.0600.0

This tool must be used for correct placement of the cable end cap.




Cable end cap

Part No.

Color: transparent
Number of-poles: 5-pole
5+2-pole

06.562.0653.0
06.562.4353.0



Cable clip

Part No.

Color: gray

05.562.3000.0



Flat cable, 5-pole

10 mm², 50 A

Rated voltage:	250 V/400 V
Rated current:	50 A
Degree of protection (IP):	IP20
Connection technique:	insulation piercing
Mechanically coded:	yes

Output: parallel

Observe the installation instructions in the technical data.



Flat cable 5-pole, 10 mm²

PVC



contains halogen	halogen free
Part No.	Part No.

Cable color: ■ Light green

00.702.0306.7 00.709.0306.7

Indicate cutting length (max. 500 m)

Cable width approx. 38.5 mm, cable height approx. 10 mm.
Functional safety can only be guaranteed, if the original cable is used.
For more information see Technical Data.



5-pole, feed-in

5G16 mm², screw connection with strain relief

Feed-in

Part No.

Color: ■ black

92.050.9053.0

5-pole, feed-in central



5G10 mm², screw connection with strain relief

Feed-in central

Part No.

Color: zinc-plated

92.050.8853.0



Adapter


5G6 mm² solid and fine-stranded, screw connection with strain relief

Adapter

Part No.

Color: ■ black


92.050.9153.0



Flat cable, 5-pole

16 mm², 63 A

Rated voltage:	250 V/400 V	Output:	parallel
Rated current:	63 A		
Degree of protection (IP):	IP65		
Connection technique:	insulation piercing		
Mechanically coded:	yes	Observe the installation instructions in the technical data.	



Flat cable 5-pole, 16 mm²

PVC

Length (m)	contains halogen	halogen free
Part No.	Part No.	Part No.

Cable color:	Light gray	00.702.0307.3	00.709.0307.3
--------------	------------	---------------	---------------

Indicate cutting length (max. 500 m)

Cable width approx. 48,5 mm, cable height approx. 11,3 mm.
Functional safety can only be guaranteed, if the original cable is used.
For more information see Technical Data.



Feed-in

for round cables, 5 x 16 mm²,
screw connection

Feed-in

Part No.

Color:	black	92.050.8453.0
--------	-------	---------------



Adapter mains (output)

Tapping for round cables 5x6 mm²
screw connection

Adapter

mains (output)
Part No.

Color:	black	92.050.8553.0
--------	-------	---------------



Flat cable adapter

incl. circuit breaker and
GST18 outputs

Adapter


GST18
Part No.

Color:	zinc-plated	G0.000.0044.7
--------	-------------	---------------

Accessories for flat cables, 5-pole, 10/16 mm²

Observe the installation instructions in the technical data.

Functional safety can only be guaranteed, if the original cable is used.
For more information see Technical Data.



Cable end cap 10 mm²


Sheath strip length approx. 20 mm

cable end cap

Part No.

Color: transparent

05.563.9553.0



Cable end cap 16 mm²


Sheath strip length approx. 20 mm

cable end cap

Part No.

Color: transparent

05.563.9453.0



Cable clip


for flat cables 10/16 mm²

cable clip

Part No.

Color: ■ black

05.563.9753.0



Cable clip

cable clip

Part No.

Color: ■ gray

05.562.3000.0



M40 x 1.5




M25 x 1.5



M25 x 1.5



M25 x 1.5



Cable gland for connection boxes

Color	Connec. range mm	Cable gland	Part No.
■ gray	16 – 28 mm	M40 x 1.5	91.951.9053.1
■ gray	7 – 16 mm	M25 x 1.5	91.951.9053.0
Metal	11 – 18 mm	M25 x 1.5	91.951.9453.0

Filler plug

for connection box cable gland

Color	Cable gland	Part No.
■ gray	M25 x 1.5	05.507.4153.0



Country-specific products



Great Britain

Page 150 – 179



Spain

Page 180 – 187



More information
<http://eshop.wieland-electric.com>





Great Britain



from page

GST18i3	Connector, distributor, cable assemblies	152
GST18i4	Connector, distributor, cable assemblies	158
GST18i5	Connector, distributor, cable assemblies	167
GST18i6	Connector, distributor, cable assemblies	171
MST	Cable assemblies, distributor and accessories	176

e-
Shop

More information
<http://eshop.wieland-electric.com>






Connector assemblies for luminaire connection, 3-pole

1.5 mm²



Rated voltage:	250 V/400 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	6 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Sheath strip length:	35 mm
Degree of protection (IP):	IP20, IP40 when plugged	Wire stripping length:	9 mm

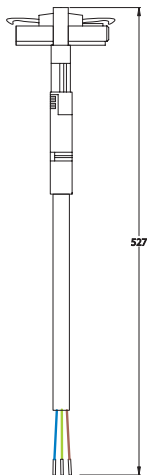

T-piece with connection cable 3G

Sheath **LSOH 3G1.5**

Color of the coding	Cable / T-piece	Length m	Part No.
☐ white	white	0.5	99.424.9910.0
Luminaire connection: Free end			



T-piece with connecting cable 3G

Sheath **LSOH 3G1.5**

Color of the coding	Cable / T-piece	Length m	Part No.
☐ white	white	0.5	G1.933.0502.2
Luminaire connection: GST18i3 female			


Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Switch module with connection cable, 3-pole

1.5 mm²


Rated voltage:	250 V/400 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Sheath strip length:	35 mm
Degree of protection (IP):	IP20, IP40 when plugged	Wire stripping length:	9 mm

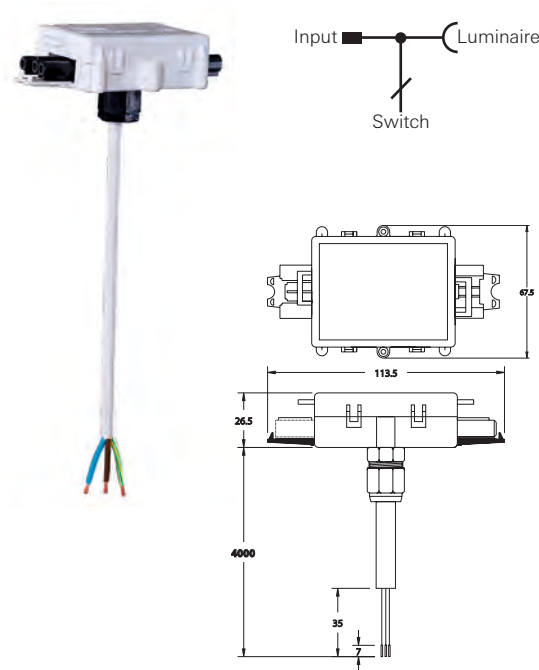

On/off switch 1-pole (L1)

Sheath **LSOH 3G1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black	white	4.0 / 3 wires	G1.833.0412.1
On/off switch – connection cable, free end			

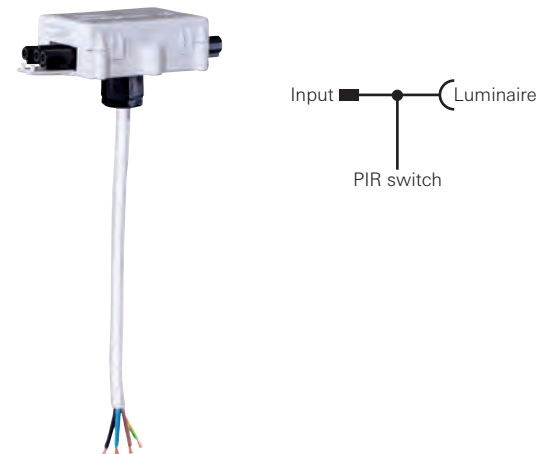

Infrared motion detector (L1)

Sheath **LSOH 3G1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black	white	4.0 / 4 wires	G1.834.0442.1
Passive infrared switch – connection cable, free end			






Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV. Reference to BS7671 559 should be considered.



Switch modules, 3-pole

Rated voltage:	250 V
Rated current:	16 A
Rated impulse voltage:	4 kV

Distribution block



On/off switch

Color of the coding	Color	Part No.
☐ white	white	G1.830.0012.1
with through-wiring		



Infrared motion detector, passive

Color of the coding	Color	Part No.
☐ white	white	G1.830.0042.1
with through-wiring		



2-way switch

Color of the coding	Color	Part No.
☐ white	white	G1.830.0062.1






Distribution boxes with 2.5 mm² wiring,
metal housing, 3-pole


Rated voltage:	250 V
Rated current:	20 A
Rated impulse voltage:	4 kV
Housing:	Metal

Distribution box

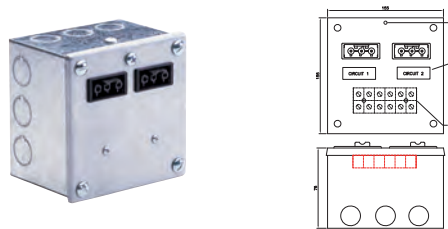


Two circuits

Color of the coding	Color	Part No.
■ black	metal	G1.132.4403.1
each circuit with 1 female connector, 3-pole		

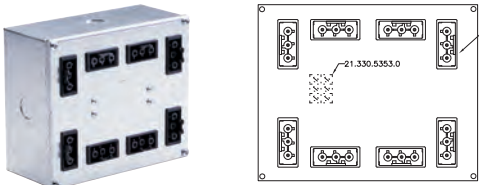

One circuit


Color of the coding	Color	Part No.
■ black	metal	G1.130.3813.1
one circuit, 8 female connectors, 3-pole		

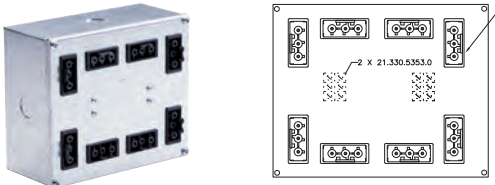

Two circuits

Color of the coding	Color	Part No.
■ black	metal	G1.130.3823.1
each circuit with 4 female connectors, 3-pole		

Besa plate, 3-pole

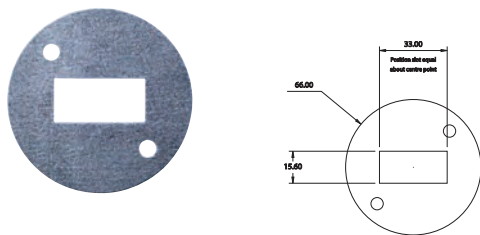

Besa plate, metal plate for Besa distribution box

Color of the coding	Color	Part No.
	metal	G1.131.1370.1
for 3 pole snap-in connectors (such as Part No. 92.031.9658.1)		
A Besa extension ring is additionally required (from third-party supplier)		






Cable assemblies, 3-pole

1.5 mm²

Rated voltage: 250 V
Rated current: 16 A
Rated impulse voltage: 4 kV
Degree of protection (IP): IP20, IP40 when plugged
Cable diameter: 8.0 mm

Cable material: H05Z1Z1-F, halogen free
Sheath strip length: 37 mm
Wire stripping length: 9 mm
The use of a locking device is mandatory.
Locking device for flying leads: see Accessories

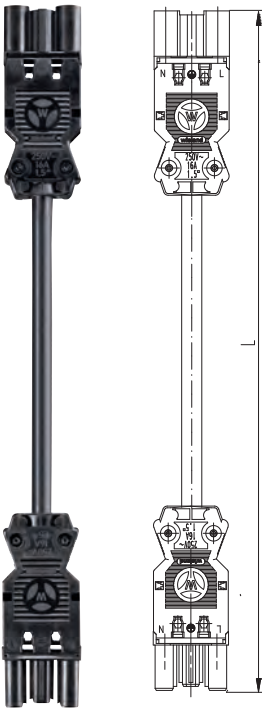


⊕ = GN/VE
N = BU
L = BN

Connecting cables female – male

H05Z1Z1-F
halogen free
Part No.

Length m

Cable color:	■ black	1	92.232.0160.1
Color of coding:	■ black	2	92.232.0260.1
Pole marking:	N, PE, L / L, PE, N	3	92.232.0360.1
Application:		4	92.232.0460.1
		5	92.232.0560.1
		6	92.232.0660.1
		7	92.232.0760.1
		8	92.232.0860.1

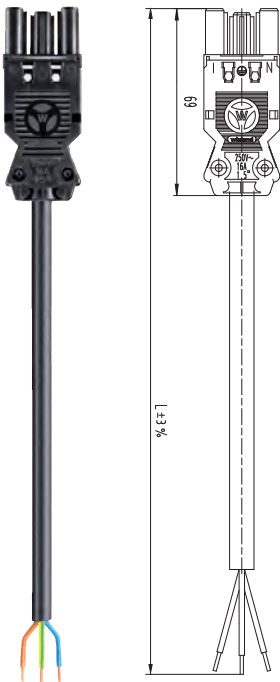

⊕ = GN/VE
N = BU
L = BN

Connection cables female – free end
Wire ends ultrasonically welded

H05Z1Z1-F
halogen free
Part No.

Length m

Cable color:	■ black	1	92.232.0163.1
Color of coding:	■ black	2	92.232.0263.1
Pole marking:	N, PE, L	3	92.232.0363.1
Application:		4	92.232.0463.1
		5	92.232.0563.1
		6	92.232.0663.1
		7	92.232.0763.1
		8	92.232.0863.1


Other cables, other lengths, other codings on request
Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Cable assemblies, 3-pole

1.5 mm²

Rated voltage:	250 V	Cable material:	H05Z1Z1-F, halogen free
Rated current:	16 A	Sheath strip length:	37 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
Cable diameter:	8.0 mm	Locking device for flying leads: see Accessories	

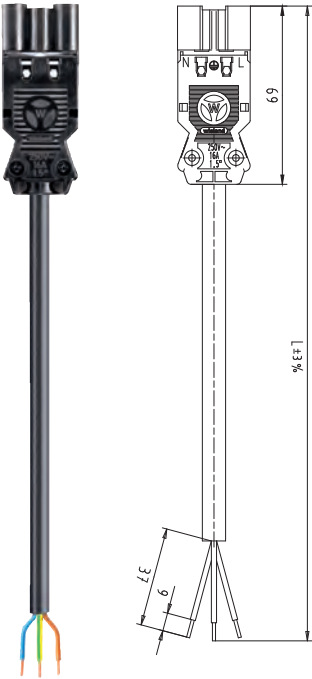

Connection cable male – free end
Wire ends ultrasonically welded

		H05Z1Z1-F halogen free
		Part No.
Length m		
Cable color:	■ black	
Color of coding:	■ black	
Pole marking:	L, PE, N	
Application:		
	1	92.232.0164.1
	2	92.232.0264.1
	3	92.232.0364.1
	4	92.232.0464.1
	5	92.232.0564.1
	6	92.232.0664.1
	7	92.232.0764.1
	8	92.232.0864.1



⊕ = GN/YE
N = BU
L = BN




Other cables, other lengths, other codings on request
Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Connector assemblies for luminaire connection, 4-pole

1.5 mm²



Rated voltage:	250 V/400 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	6 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Sheath strip length:	35 mm
Degree of protection (IP):	IP20, IP40 when plugged	Wire stripping length:	9 mm

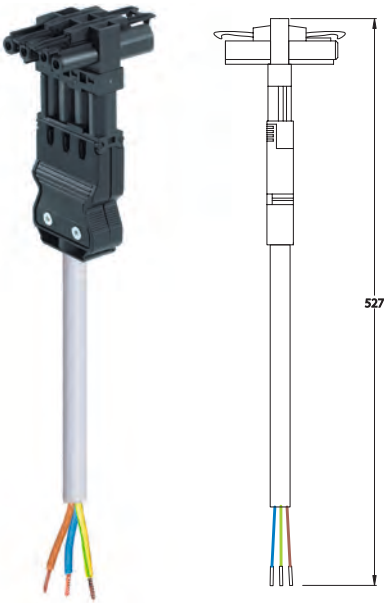

T-piece with connecting cable 3G

Sheath **LSOH 3G1.5**

Color of the coding	Cable / T-piece / Connector	Length m	Part No.
■ black	white / black / black	0.5 / 3 wires	G1.943.0542.1
Luminaire connection: Free end			

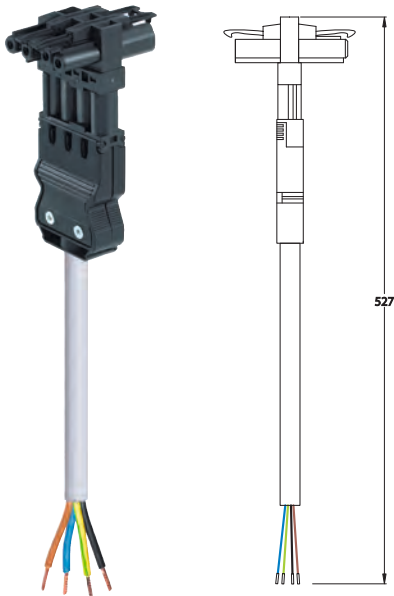

T-piece with connecting cable 4G

Sheath **LSOH 4G1.5**

Color of the coding	Cable / T-piece / Connector	Length m	Part No.
■ black	white / black / black	0.5 / 4 wires	G1.944.0542.1
Luminaire connection: Free end			


Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Switch module with connection cable, 4-pole

1.5 mm²


Rated voltage:	250 V/400 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Sheath strip length:	35 mm
Degree of protection (IP):	IP20, IP40 when plugged	Wire stripping length:	9 mm



On/off switch 1-pole (L1)

Sheath **LSOH 3G1.5**


Color of the coding	Cable / housing	Length m	Part No.
■ black	white	4.0 / 3 wires	G1.843.0412.1
On/off switch – connection cable, free end			

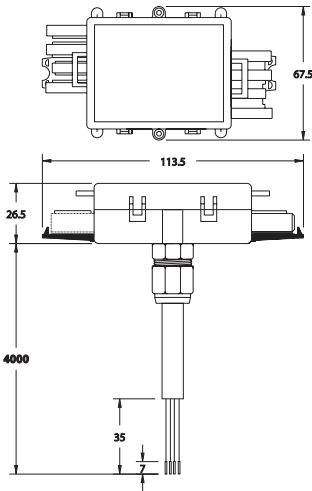

On/off switch 1-pole (L2, emergency lighting)

Sheath **LSOH 3G1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black	white	4.0 / 3 wires	G1.843.0422.1
On/off switch – connection cable, free end			



Infrared motion detector

Sheath **LSOH 4G1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black	white	4.0 / 4 wires	G1.844.0442.1
Passive infrared switch – connection cable, free end			




Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV. Reference to BS7671 559 should be considered.



Switch module with connection cable, 4-pole

1.5 mm²



Rated voltage:	250 V/400 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Sheath strip length:	35 mm
Degree of protection (IP):	IP20, IP40 when plugged	Wire stripping length:	9 mm

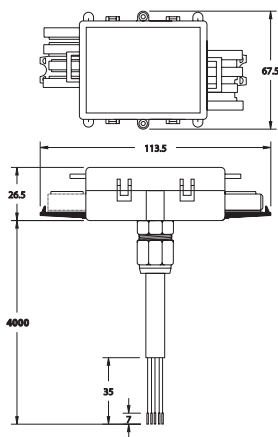

On/off switch 2-pole (L1 + L2)

Sheath **LSOH 5G1.5**

Color of the coding	Cable / housing	Length m	Part No.
☐ white	white	4.0 / 5 wires	G1.845.0432.2
On/off switch – connection cable, free end			

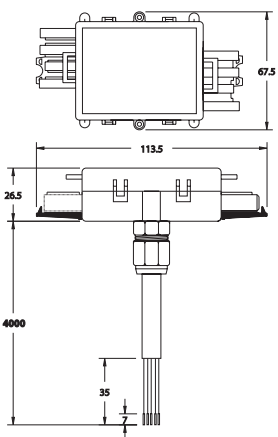

Adapter for 2-way intermediate switches

Sheath **LSOH 5G1.5**

Color of the coding	Cable / housing	Length m	Part No.
☐ white	white	4.0 / 5 wires	G1.845.0472.2
2-way switch – connection cable, free end			


Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Switch modules, 4-pole

Rated voltage:	250 V
Rated current:	16 A
Rated impulse voltage:	4 kV

Distribution block

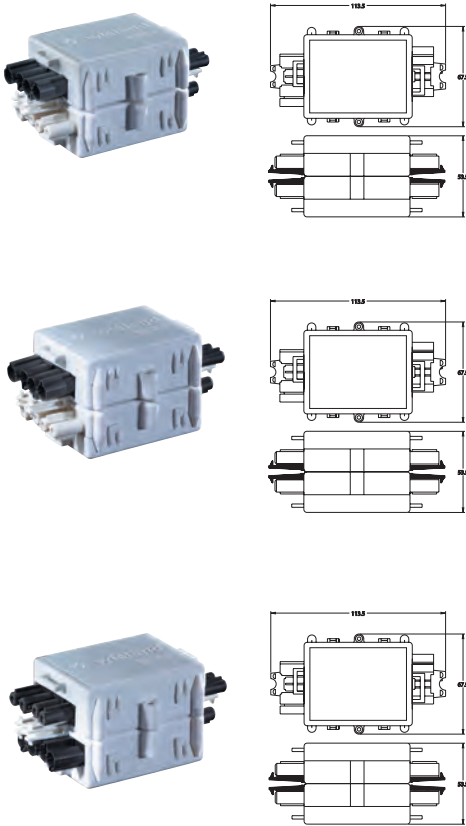


On/off switch (L1)

Color of the coding	Color	Part No.
□ white	white	G1.840.0012.1
with through-wiring		



Infrared motion detector, passive (L1)

Color of the coding	Color	Part No.
□ white	white	G1.840.0042.1
with through-wiring		



2-way (L1)

Color of the coding	Color	Part No.
□ white	white	G1.840.0062.1






Distribution boxes with 2.5 mm² wiring, metal housing, 4-pole


Rated voltage:	250 V
Rated current:	20 A
Rated impulse voltage:	4 kV
Housing:	Metal

Distribution box

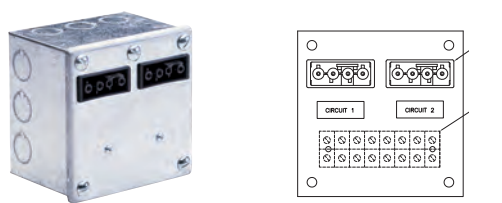


Two circuits

Color of the coding	Color	Part No.
■ black	metal	G1.142.4403.1
each circuit with 2 female connectors, 4-pole		

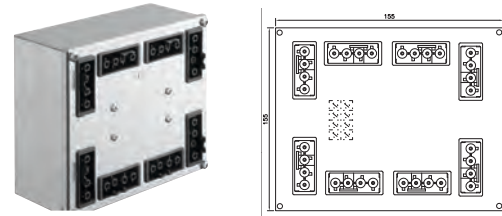

One circuit


Color of the coding	Color	Part No.
■ black	metal	G1.140.4813.1
one circuit, 8 female connectors, 4-pole		

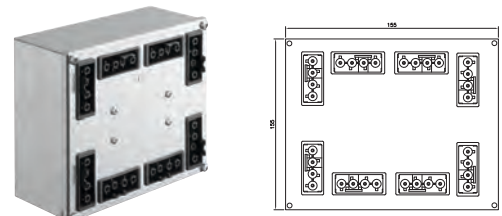

Two circuits

Color of the coding	Color	Part No.
■ black	metal	G1.140.4813.1
each circuit with 4 female connectors, 4-pole		

Besa plate, 4-pole

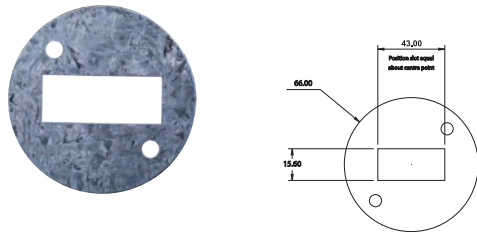

Besa plate, metal plate for Besa distribution box


Color of the coding	Color	Part No.
	metal	G1.141.1300.1
for 4-pole snap-in connectors (such as Part No. 92.041.9658.1)		
A Besa extension ring is additionally required (from third-party supplier)		



Cable assemblies, 4-pole

1.5 mm²

Rated voltage:	250 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Sheath strip length:	35 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
Cable diameter:	8.1 mm	Locking device for flying leads: see Accessories	

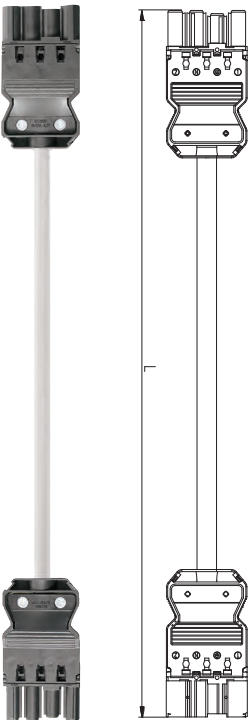

⊕ = GN/YE
N = BU
1 = BN
2 = BK

Connecting cables female – male


LSOH 4G1.5

halogen free

Length m Part No.

Cable color:		□ white
Color of coding:	■ black	1 G1.044.0102.1
Pole marking:		2 G1.044.0202.1
Application:		3 G1.044.0302.1
		4 G1.044.0402.1
		5 G1.044.0502.1
		6 G1.044.0602.1
		7 G1.044.0702.1
		8 G1.044.0802.1

Colour cable:		□ white
Colour coding:	□ white	1 G1.044.0102.2
Pole marking:		2 G1.044.0202.2
Application:		3 G1.044.0302.2
		4 G1.044.0402.2
		5 G1.044.0502.2
		6 G1.044.0602.2
		7 G1.044.0702.2
		8 G1.044.0802.2

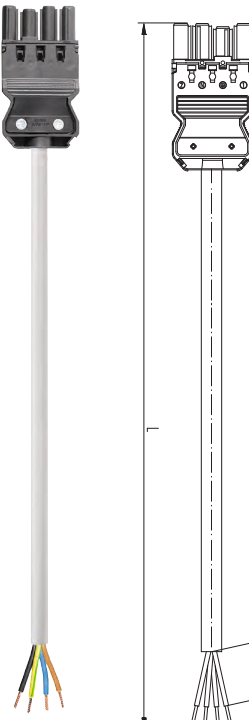

⊕ = GN/YE
N = BU
1 = BN
2 = BK

Connection cables female – free end
Wire ends ultrasonically welded

LSOH 4G1.5

halogen free

Length m Part No.

Cable color:		□ white
Color of coding:	■ black	1 G1.344.0102.1
Pole marking:		2 G1.344.0202.1
Application:		3 G1.344.0302.1
		4 G1.344.0402.1
		5 G1.344.0502.1
		6 G1.344.0602.1
		7 G1.344.0702.1
		8 G1.344.0802.1

Cable color:		□ white
Colour coding:	□ white	1 G1.344.0102.2
Pole marking:		2 G1.344.0202.2
Application:		3 G1.344.0302.2
		4 G1.344.0402.2
		5 G1.344.0502.2
		6 G1.344.0602.2
		7 G1.344.0702.2
		8 G1.344.0802.2




Other cables, other lengths, other codings on request
Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Cable assemblies, 4-pole

1.5 mm²

Rated voltage:	250 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Sheath strip length:	37 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
Cable diameter:	8.1 mm	Locking device for flying leads: see Accessories	

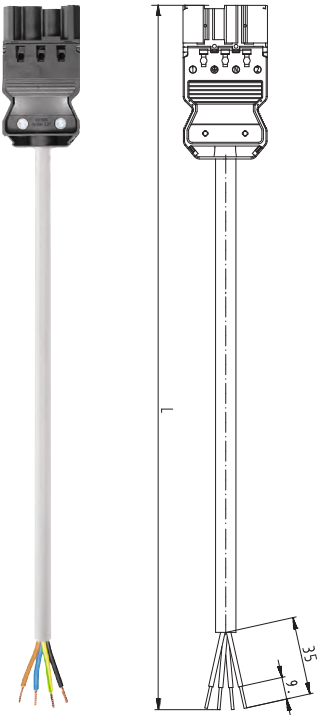

Connection cable male – free end
Wire ends ultrasonically welded

LSOH 4G1.5
halogen free
Part No.

		Length m	Part No.
Cable color:	■ black	1	G1.444.0102.1
Color of coding:		2	G1.444.0202.1
Pole marking:		3	G1.444.0302.1
Application:		4	G1.444.0402.1
		5	G1.444.0502.1
		6	G1.444.0602.1
		7	G1.444.0702.1
		8	G1.444.0802.1

Cable color:	□ white	1	G1.444.0102.2
Color of coding:		2	G1.444.0202.2
Pole marking:		3	G1.444.0302.2
Application:		4	G1.444.0402.2
		5	G1.444.0502.2
		6	G1.444.0602.2
		7	G1.444.0702.2
		8	G1.444.0802.2

Other cables, other lengths, other codings on request
Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.




Cable assemblies, 4-pole

2.5 mm²

Rated voltage:	250 V
Rated current:	20 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged
Cable diameter:	10.3 mm

Cable material:	LSOH to EN 50363-0 70° halogen free
Sheath strip length:	35 mm
Wire stripping length:	9 mm
The use of a locking device is mandatory.	
Locking device for flying leads: see Accessories	

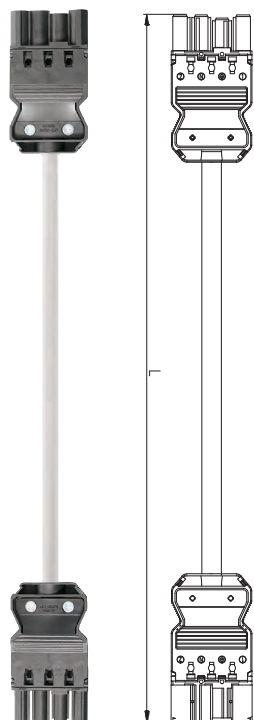

⊕ = GN/YE
N = BU
1 = BN
2 = BK

Connecting cables female – male


LSOH 4G2.5

halogen free

Length m Part No.

Cable color:	■ black	□ white
Color of coding:	1	G1.044.0103.1
Pole marking:	2	G1.044.0203.1
Application:	3	G1.044.0303.1
	4	G1.044.0403.1
	5	G1.044.0503.1
	6	G1.044.0603.1
	7	G1.044.0703.1
	8	G1.044.0803.1

Cable color:	□ white	□ white
Color of coding:	1	G1.044.0103.2
Pole marking:	2	G1.044.0203.2
Application:	3	G1.044.0303.2
	4	G1.044.0403.2
	5	G1.044.0503.2
	6	G1.044.0603.2
	7	G1.044.0703.2
	8	G1.044.0803.2

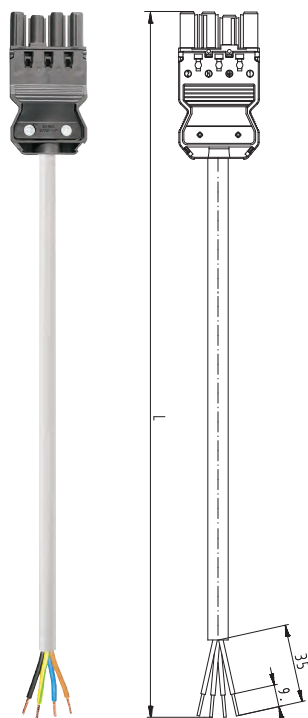

⊕ = GN/YE
N = BU
1 = BN
2 = BK

Connection cables female – free end Wire ends ultrasonically welded

LSOH 4G2.5

halogen free

Length m Part No.

Cable color:	■ black	□ white
Color of coding:	1	G1.344.0103.1
Pole marking:	2	G1.344.0203.1
Application:	3	G1.344.0303.1
	4	G1.344.0403.1
	5	G1.344.0503.1
	6	G1.344.0603.1
	7	G1.344.0703.1
	8	G1.344.0803.1

Cable color:	□ white	□ white
Color of coding:	1	G1.344.0103.2
Pole marking:	2	G1.344.0203.2
Application:	3	G1.344.0303.2
	4	G1.344.0403.2
	5	G1.344.0503.2
	6	G1.344.0603.2
	7	G1.344.0703.2
	8	G1.344.0803.2

Other cables, other lengths, other codings on request

Note:


Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV. Reference to BS7671 559 should be considered.





Cable assemblies, 4-pole

2.5 mm ²			
Rated voltage:	250 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	20 A	Sheath strip length:	35 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
Cable diameter:	10.3 mm	Locking device for flying leads: see Accessories	

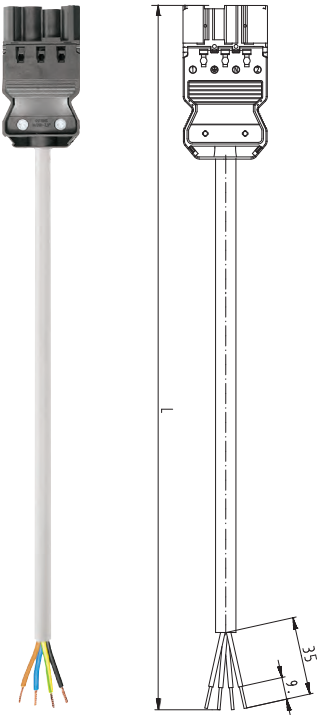

Connection cable male – free end
Wire ends ultrasonically welded

		LSOH 4G2.5 halogen free
		Part No.
Length m		
Cable color:		□ white
Color of coding:	■ black	1 G1.444.0103.1
Pole marking:		2 G1.444.0203.1
Application:		3 G1.444.0303.1
		4 G1.444.0403.1
		5 G1.444.0503.1
		6 G1.444.0603.1
		7 G1.444.0703.1
		8 G1.444.0803.1
Cable color:		□ white
Color of coding:	□ white	1 G1.444.0103.2
Pole marking:		2 G1.444.0203.2
Application:		3 G1.444.0303.2
		4 G1.444.0403.2
		5 G1.444.0503.2
		6 G1.444.0603.2
		7 G1.444.0703.2
		8 G1.444.0803.2


Other cables, other lengths, other codings on request
Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Connector assemblies for luminaire connection, 5-pole

1.5 mm²

Rated voltage:	250 V/400 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Lockable:	Yes
Rated impulse voltage:	4 kV	Sheath strip length:	35 mm
Degree of protection (IP):	IP20, IP40 when plugged	Wire stripping length:	9 mm

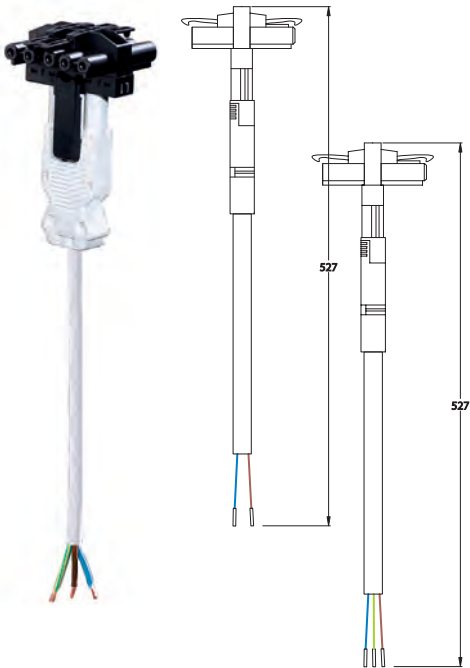

T-piece with connecting cable 2x1.5 mm²



Sheath **LSOH 2x1.5**

Color of the coding	Cable / T-piece / Connector	Length m	Part No.
■ pastel blue	white / black / black	0.5 / 2 wires	G1.952.0542.7
Luminaire connection: Free end			

T-piece with connecting cable 3G

Sheath **LSOH 3G1.5**


Color of the coding	Cable / T-piece / Connector	Length m	Part No.
□ white	white / black / white	0.5 / 3 wires	G1.953.0542.1
■ pastel blue	white / black / white	0.5 / 3 wires	G1.953.0542.7
Luminaire connection: Free end			

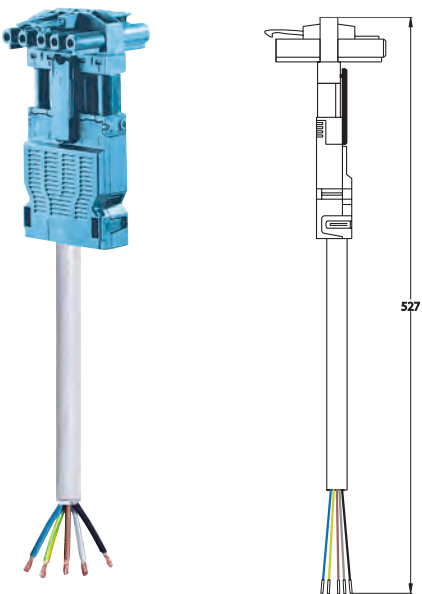

T-piece with connecting cable

Sheath **LSOH 5G1.5**

Color of the coding	Cable / T-piece / Connector	Length m	Part No.
□ white	white / black / black	0.5 / 5 wires	G1.955.0542.1
■ pastel blue	white / black / black	0.5 / 5 wires	G1.955.0542.7
Luminaire connection: Free end			




Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Besa plate, 5-pole

Besa plate, 5 pole



Besa plate, metal plate for Besa distribution box

Color of the coding	Color	Part No.
	metal	34.399.1673.1
for 5 pole snap-in connectors (such as Part No. 92.051.8658.0)		
A Besa extension ring is additionally required (from third-party supplier)		




Cable assemblies, 5-pole

1.5 mm²

Rated voltage:	250 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged
Cable diameter:	9.3 mm

Cable material:	LSOH to EN 50363-0 70° halogen free
Sheath strip length:	35 mm
Wire stripping length:	9 mm
The use of a locking device is mandatory.	
Locking device for flying leads: see Accessories	

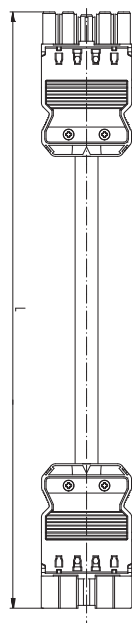

Power 250 V + dimming:

⊕ = GN/YE
N = BU
L = BN
D2 = WH
D1 = RD



Power 250 V:

⊕ = GN/YE
N = BU
1 = BN
2 = BK
3 = GY

Connecting cables female – male

LSOH 5G1.5


halogen free

Length m Part No.

Cable color:	■ pastel blue	□ white
Color of coding:	1	G1.055.0102.7
Pole marking:	2	G1.055.0202.7
Application:	3	G1.055.0302.7
	4	G1.055.0402.7
	5	G1.055.0502.7
	7	G1.055.0702.7
	10	G1.055.1002.7

Cable color:	■ black	□ white
Color of coding:	1	G1.055.0102.1
Pole marking:	2	G1.055.0202.1
Application:	3	G1.055.0302.1
	4	G1.055.0402.1
	5	G1.055.0502.1
	7	G1.055.0702.1
	10	G1.055.1002.1

Due to the different wiring configurations adapted to British standards, these cables must not be used together with other GST18i5 cable assemblies.

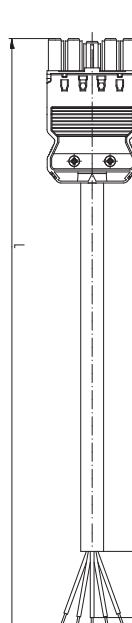

Power 250 V + dimming:

⊕ = GN/YE
N = BU
L = BN
D2 = WH
D1 = RD



Power 250 V:

⊕ = GN/YE
N = BU
1 = BN
2 = BK
3 = GY

Connection cables female – free end Wire ends ultrasonically welded

LSOH 5G1.5

halogen free

Length m Part No.

Cable color:	■ pastel blue	□ white
Color of coding:	1	G1.355.0102.7
Pole marking:	2	G1.355.0202.7
Application:	3	G1.355.0302.7
	4	G1.355.0402.7
	5	G1.355.0502.7
	7	G1.355.0702.7
	10	G1.355.1002.7

Cable color:	■ black	□ white
Color of coding:	1	G1.355.0102.1
Pole marking:	2	G1.355.0202.1
Application:	3	G1.355.0302.1
	4	G1.355.0402.1
	5	G1.355.0502.1
	7	G1.355.0702.1
	10	G1.355.1002.1

Due to the different wiring configurations adapted to British standards, these cables must not be used together with other GST18i5 cable assemblies.

Other cables, other lengths, other codings on request

Note:


Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV. Reference to BS7671 559 should be considered.



Cable assemblies, 5-pole

1.5 mm²

Rated voltage:	250 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Sheath strip length:	35 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
Cable diameter:	9.3 mm	Locking device for flying leads: see Accessories	

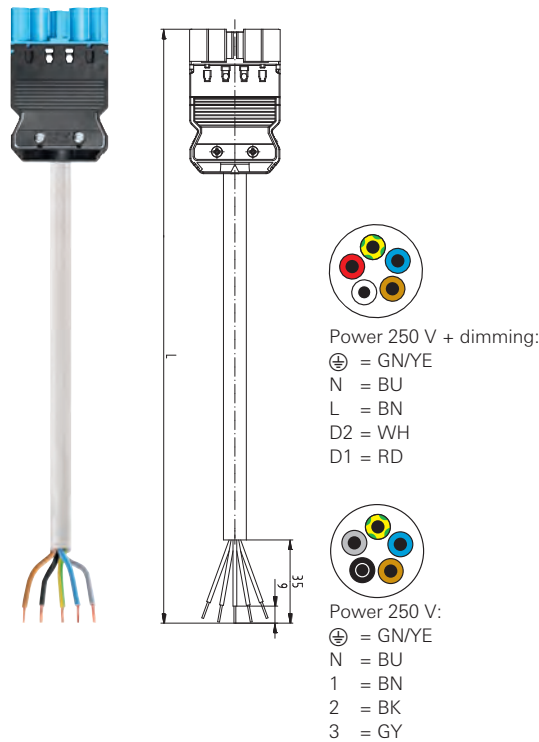

Connection cable male – free end
Wire ends ultrasonically welded

LSOH 5G1.5
halogen free

		Length m	Part No.
Cable color:			☐ white
Color of coding:	☒ pastel blue	1	G1.455.0102.7
Pole marking:		2	G1.455.0202.7
Application:		3	G1.455.0302.7
		4	G1.455.0402.7
		5	G1.455.0502.7
		7	G1.455.0702.7
		10	G1.455.1002.7

Cable color:			☐ white
Color of coding:	☒ black	1	G1.455.0102.1
Pole marking:		2	G1.455.0202.1
Application:		3	G1.455.0302.1
		4	G1.455.0402.1
		5	G1.455.0502.1
		7	G1.455.0702.1
		10	G1.455.1002.1

Due to the different wiring configurations adapted to British standards, these cables must not be used together with other GST18i5 cable assemblies.

Other cables, other lengths, other codings on request
Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.





Connector assemblies for luminaire connection, 6-pole

1,5 mm²

Rated voltage: 250 V/400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Degree of protection (IP): IP20, IP40 when plugged

Cable material: LSOH to EN 50363-0, 70° halogen free
 Lockable: Yes
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm

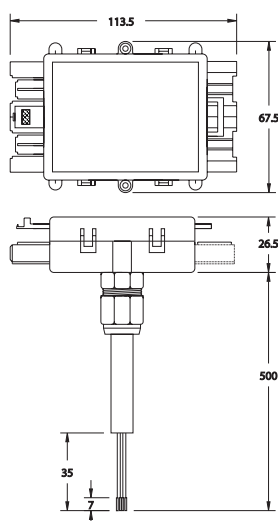

T-piece with connecting cable 2x1.5 mm²


Sheath **LSOH 2x1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black/	white / white	0.5 / 2 wires	G1.962.0542.9
■ pastel blue			
Luminaire connection – Free end			

T-piece with connecting cable 3G

Sheath **LSOH 3G1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black/	white / white	0.5 / 3 wires	G1.963.0542.9
■ pastel blue			
Luminaire connection – Free end			

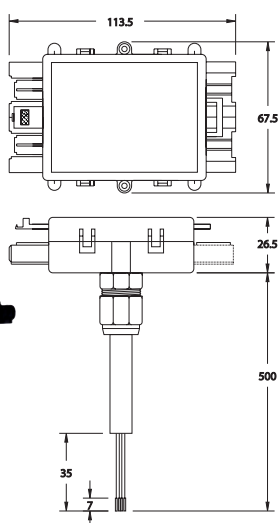

T-piece with connecting cable 4G

Sheath **LSOH 4G1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black/	white / white	0.5 / 4 wires	G1.964.0542.9
■ pastel blue			
Luminaire connection – Free end			

T-piece with connecting cable 5G

Sheath **LSOH 5G1.5**

Color of the coding	Cable / housing	Length m	Part No.
■ black/	white / white	0.5 / 5 wires	G1.965.0542.9
■ pastel blue			
Luminaire connection – Free end			

Note:
 Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV. Reference to BS7671 559 should be considered.






Connector assemblies for luminaire connection, 6-pole

1.5 mm²

Rated voltage:	250 V/400 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged


Cable material:	LSOH to EN 50363-0, 70° halogen free
Lockable:	Yes
Sheath strip length:	35 mm
Wire stripping length:	9 mm

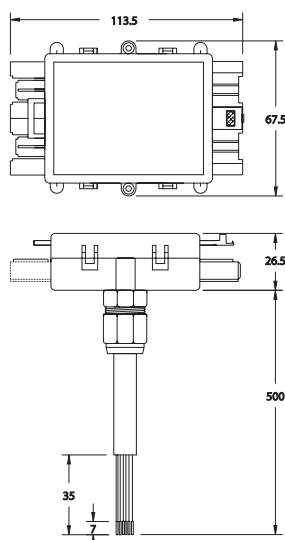

T-piece with connecting cable

Sheath **LSOH 6x1.5**


Color of the coding	Cable / housing	Length m	Part No.
■ black/ ■ pastel blue	white / white	0.5 / 6 wires	G1.966.0542.9
Luminaire connection – Free end			



Switch modules, 6-pole

Rated voltage:	250 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Approvals:	

Distribution block



Infrared motion detector, passive (L1)

Color of the coding	Color	Part No.
■ black/pastellblue with through-wiring	white	G1.860.0042.7



Distribution unit without switching functions

Color of the coding	Color	Part No.
□ white	white	G1.966.0000.7




Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Distribution boxes with 2.5 mm² wiring,
metal housing, besa plate, 6-pole


Rated voltage:	250 V
Rated current:	20 A
Rated impulse voltage:	4 kV
Housing:	Metal

Distribution box



Two circuits

Color of the coding	Color	Part No.
□ white	metal	G1.162.6603.7
each circuit with 1 female connector, 6 pole; coding pastel blue/black		



Two circuits

Color of the coding	Color	Part No.
■ black	metal	G1.162.6603.1
each circuit with 1 female connector, 6 pole; coding black/black		






Cable assemblies, 6 pole

1.5 mm²

Rated voltage:	250 V
Rated current:	16 A
Rated impulse voltage:	4 kV
Degree of protection (IP):	IP20, IP40 when plugged
Cable diameter:	10.1 mm

Cable material:	LSOH to EN 50363-0 70° halogen free
Sheath strip length:	35 mm
Wire stripping length:	9 mm
The use of a locking device is mandatory.	
Locking device for flying leads: see Accessories	

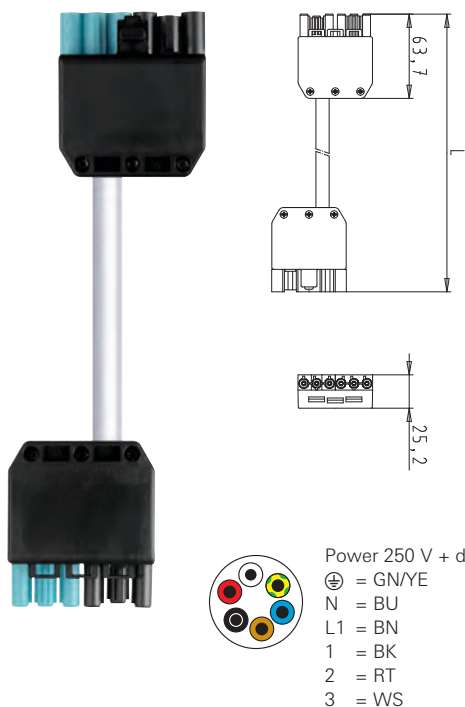

Connecting cables female – male

LSOH 6G1.5

halogen free

Length m Part No.

Cable color:	☐ white
Color of coding:	☒ black/pastel blue
Pole marking:	1
Application:	2 G1.066.0202.7
	3 G1.066.0302.7
	4 G1.066.0402.7
	5 G1.066.0502.7
	6 G1.066.0602.7
	7 G1.066.0702.7
	10 G1.066.1002.7

For ordering cable assemblies with coding black/gray replace the last digit with 0.

Due to the different wiring configurations, adapted to British standards, these cables must not be used together with other GST 18i6 cable assemblies.

Connection cables female – free end Wire ends ultrasonically welded

31838 LSOH


halogen free

Length m Part No.

Cable color:	☐ white
Color of coding:	☒ black/pastel blue
Pole marking:	1
Application:	2 G1.366.0202.7
	3 G1.366.0302.7
	4 G1.366.0402.7
	5 G1.366.0502.7
	6 G1.366.0602.7
	7 G1.366.0702.7
	10 G1.366.1002.7

For ordering cable assemblies with coding black/gray replace the last digit with 0.

Due to the different wiring configurations, adapted to British standards, these cables must not be used together with other GST 18i6 cable assemblies.

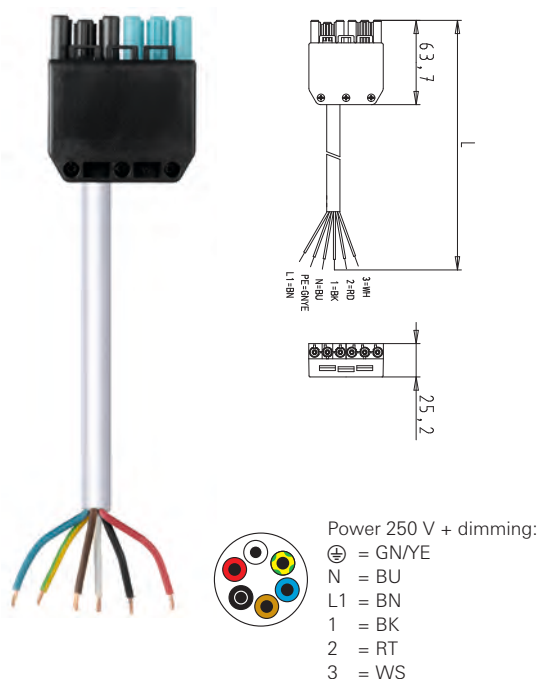

Other cables, other lengths, other codings on request

Note:


Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV. Reference to BS7671 559 should be considered.



Cable assemblies, 6 pole

1.5 mm²

Rated voltage:	250 V	Cable material:	LSOH to EN 50363-0 70° halogen free
Rated current:	16 A	Sheath strip length:	35 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
Cable diameter:	10.1 mm	Locking device for flying leads: see Accessories	

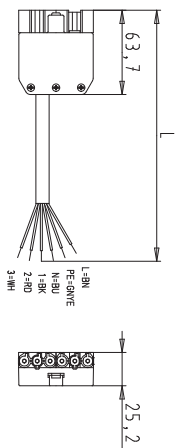

Power 250 V + dimming:
⊕ = GN/YE
N = BU
L1 = BN
1 = BK
2 = RT
3 = WS

Connection cable male – free end
Wire ends ultrasonically welded

LSOH 6G1.5
halogen free
Part No.

Length m	Part No.
1	□ white
2	G1.466.0202.7
3	G1.466.0302.7
4	G1.466.0402.7
5	G1.466.0502.7
6	G1.466.0602.7
7	G1.466.0702.7
10	G1.466.1002.7

For ordering cable assemblies with coding black/gray replace the last digit with 0.

Due to the different wiring configurations, adapted to British standards, these cables must not be used together with other GST 18i6 cable assemblies.



Other cables, other lengths, other codings on request
Note:
Cable is for indoor general wiring only. This cable is not suitable for use in high temperature zones, near incandescent lamps or for through wiring of luminaires, outdoor use, or areas of elevated UV.
Reference to BS7671 559 should be considered.



Starter Lead

Cables female – free end

Rated voltage: 250V / 250V/400V

Rated impulse voltage: 4 kV

Degree of protection (IP): IP20

Cable material: Cable LSOH as per BS7211 and Belden 8491 type when Coding C8 LON

Cable Ø: metal flexible conduit 16 mm diameter

Insulation strip length: 10 mm

Sheat strip length: 800 mm

Material single conductor: H07Z-R halogen free

Use of a RCD mandatory



MST32i3, 3 poles

Length m Part No.

Coding:	■ C1 POWER	2.0	G5.331.0206.1
	3 poles / 3 wire	3.0	G5.331.0306.1
Application:	Mains 250 V	5.0	G5.331.0506.1
	32 A	7.0	G5.331.0706.1
	6.0 mm ²	9.0	G5.331.0906.1
		11.0	G5.331.1106.1
		13.0	G5.331.1306.1
		15.0	G5.331.1506.1



MST25i4, 4 poles

Length m Part No.

Coding:	■ C2	2.0	G5.341.0204.2
	4 poles / 4 wire	3.0	G5.341.0304.2
Application:	Mains 250 V +	5.0	G5.341.0504.2
	"high integrity	7.0	G5.341.0704.2
	earth"	9.0	G5.341.0904.2
	25 A	11.0	G5.341.1104.2
	4.0 mm ²	13.0	G5.341.1304.2
		15.0	G5.341.1504.2



MST20i3, 3 poles

Length m Part No.

Coding:	□ C3	2.0	G5.331.0203.3
	3 poles / 3 wire	3.0	G5.331.0303.3
Application:	Mains 250 V	5.0	G5.331.0503.3
	20 A	7.0	G5.331.0703.3
	2.5 mm ²	9.0	G5.331.0903.3
		11.0	G5.331.1103.3
		13.0	G5.331.1303.3
		15.0	G5.331.1503.3



MST20i3, 3 poles

Length m Part No.

Coding:	□ C3	2.0	G5.331.0204.3
	3 poles / 3 wire	3.0	G5.331.0304.3
Application:	Mains 250 V	5.0	G5.331.0504.3
	20 A	7.0	G5.331.0704.3
	4.0 mm ²	9.0	G5.331.0904.3
		11.0	G5.331.1104.3
		13.0	G5.331.1304.3
		15.0	G5.331.1504.3



MST20i4, 4 poles

Length m Part No.

Coding:	■ C4	2.0	G5.341.0203.4
	4 poles / 4 wire	3.0	G5.341.0303.4
Application:	Mains 250 V +	5.0	G5.341.0503.4
	emergency light	7.0	G5.341.0703.4
	20 A	9.0	G5.341.0903.4
	2.5 mm ²	11.0	G5.341.1103.4
		13.0	G5.341.1303.4
		15.0	G5.341.1503.4



MST20i4, 4 poles

Length m Part No.

Coding:	■ C4	2.0	G5.341.0204.4
	4 poles / 4 wire	3.0	G5.341.0304.4
Application:	Mains 250 V +	5.0	G5.341.0504.4
	emergency light	7.0	G5.341.0704.4
	20 A	9.0	G5.341.0904.4
	4.0 mm ²	11.0	G5.341.1104.4
		13.0	G5.341.1304.4
		15.0	G5.341.1504.4



MST20i5, 5 poles

Length m Part No.

Coding:	■ C5 DALI	2.0	G5.351.0203.5
	5 poles / 5 wire	3.0	G5.351.0303.5
Application:	DALI 250 V	5.0	G5.351.0503.5
	20 A	7.0	G5.351.0703.5
	2.5 mm ²	9.0	G5.351.0903.5
		11.0	G5.351.1103.5
		13.0	G5.351.1303.5
		15.0	G5.351.1503.5



MST20i6, 6 poles

Length m Part No.

Coding:	■ C6	2.0	G5.361.0203.6
	6 poles / 6 wire	3.0	G5.361.0303.6
Application:	DALI 250 V +	5.0	G5.361.0503.6
	emergency light	7.0	G5.361.0703.6
	20 A	9.0	G5.361.0903.6
	2.5 mm ²	11.0	G5.361.1103.6
		13.0	G5.361.1303.6
		15.0	G5.361.1503.6



MST20i5, 5 poles

Length m Part No.

Coding:	■ C7, 3 Phase	2.0	G5.351.0203.7
	5 poles / 5 wire	3.0	G5.351.0303.7
Application:	Mains 250 V /	5.0	G5.351.0503.7
	400 V	7.0	G5.351.0703.7
	20 A	9.0	G5.351.0903.7
	2.5 mm ²	11.0	G5.351.1103.7
		13.0	G5.351.1303.7
		15.0	G5.351.1503.7



MST20i6, 6 poles

Length m Part No.

Coding:	■ C8 LON	2.0	G5.361.0203.8
	6 poles / 6 wire	3.0	G5.361.0303.8
Application:	Mains 250 V	5.0	G5.361.0503.8
	20 A	7.0	G5.361.0703.8
	2.5 mm ²	9.0	G5.361.0903.8
		11.0	G5.361.1103.8
		13.0	G5.361.1303.8
		15.0	G5.361.1503.8





Extender Lead

Connecting cables male – female

Rated voltage: 250V / 250V/400V

Rated impulse voltage: 4 kV

Degree of protection (IP): IP20

Cable material: Cable LSOH as per BS7211 and Belden 8491 type when Coding C8 LON

Cable Ø: metal flexible conduit 16 mm diameter

Material single conductor: H07Z-R halogen free

Use of a RCD mandatory



MST32i3, 3 poles

Length m Part No.

Coding:	■ C1 POWER	2.0	G5.031.0206.1
	3 poles / 3 wire	3.0	G5.031.0306.1
Application:	Mains 250 V	5.0	G5.031.0506.1
	32 A	7.0	G5.031.0706.1
	6.0 mm ²	9.0	G5.031.0906.1
		11.0	G5.031.1106.1
		13.0	G5.031.1306.1
		15.0	G5.031.1506.1



MST25i4, 4 poles

Length m Part No.


Coding:	■ C2	2.0	G5.041.0204.2
	4 poles / 4 wire	3.0	G5.041.0304.2
Application:	Mains 250 V +	5.0	G5.041.0504.2
	"high integrity	7.0	G5.041.0704.2
	earth"	9.0	G5.041.0904.2
	25 A	11.0	G5.041.1104.2
	4.0 mm ²	13.0	G5.041.1304.2
		15.0	G5.041.1504.2



MST20i3, 3 poles

Length m Part No.

Coding:	□ C3	2.0	G5.031.0203.3
	3 poles / 3 wire	3.0	G5.031.0303.3
Application:	Mains 250 V	5.0	G5.031.0503.3
	20 A	7.0	G5.031.0703.3
	2.5 mm ²	9.0	G5.031.0903.3
		11.0	G5.031.1103.3
		13.0	G5.031.1303.3
		15.0	G5.031.1503.3



MST20i3, 3 poles

Length m Part No.

Coding:	□ C3	2.0	G5.031.0204.3
	3 poles / 3 wire	3.0	G5.031.0304.3
Application:	Mains 250 V	5.0	G5.031.0504.3
	20 A	7.0	G5.031.0704.3
	4.0 mm ²	9.0	G5.031.0904.3
		11.0	G5.031.1104.3
		13.0	G5.031.1304.3
		15.0	G5.031.1504.3



MST20i4, 4 poles

Length m Part No.

Coding:	■ C4	2.0	G5.041.0203.4
	4 poles / 4 wire	3.0	G5.041.0303.4
Application:	Mains 250 V +	5.0	G5.041.0503.4
	emergency light	7.0	G5.041.0703.4
	20 A	9.0	G5.041.0903.4
	2.5 mm ²	11.0	G5.041.1103.4
		13.0	G5.041.1303.4
		15.0	G5.041.1503.4



MST20i4, 4 poles

Length m Part No.


Coding:	■ C4	2.0	G5.041.0204.4
	4 poles / 4 wire	3.0	G5.041.0304.4
Application:	Mains 250 V +	5.0	G5.041.0504.4
	emergency light	7.0	G5.041.0704.4
	20 A	9.0	G5.041.0904.4
	4.0 mm ²	11.0	G5.041.1104.4
		13.0	G5.041.1304.4
		15.0	G5.041.1504.4



MST20i5, 5 poles

Length m Part No.


Coding:	■ C5 DALI	2.0	G5.051.0203.5
	5 poles / 5 wire	3.0	G5.051.0303.5
Application:	DALI 250 V	5.0	G5.051.0503.5
	20 A	7.0	G5.051.0703.5
	2.5 mm ²	9.0	G5.051.0903.5
		11.0	G5.051.1103.5
		13.0	G5.051.1303.5
		15.0	G5.051.1503.5



MST20i6, 6 poles

Length m Part No.

Coding:	■ C6	2.0	G5.061.0203.6
	6 poles / 6 wire	3.0	G5.061.0303.6
Application:	DALI 250 V +	5.0	G5.061.0503.6
	emergency light	7.0	G5.061.0703.6
	20 A	9.0	G5.061.0903.6
	2.5 mm ²	11.0	G5.061.1103.6
		13.0	G5.061.1303.6
		15.0	G5.061.1503.6



MST20i5, 5 poles

Length m Part No.

Coding:	■ C7, 3 Phase	2.0	G5.051.0203.7
	5 poles / 5 wire	3.0	G5.051.0303.7
Application:	Mains 250 V /	5.0	G5.051.0503.7
	400 V	7.0	G5.051.0703.7
	20 A	9.0	G5.051.0903.7
	2.5 mm ²	11.0	G5.051.1103.7
		13.0	G5.051.1303.7
		15.0	G5.051.1503.7



MST20i6, 6 poles

Length m Part No.

Coding:	■ C8 LON	2.0	G5.061.0203.8
	6 poles / 6 wire	3.0	G5.061.0303.8
Application:	Mains 250 V	5.0	G5.061.0503.8
	20 A	7.0	G5.061.0703.8
	2.5 mm ²	9.0	G5.061.0903.8
		11.0	G5.061.1103.8
		13.0	G5.061.1303.8
		15.0	G5.061.1503.8





Drop Lead

Cables female – free end

Rated voltage: 250V / 250V/400V

Rated impulse voltage: 4 kV

Degree of protection (IP): IP20

Cable material: Cable LSOH as per BS7211 and Belden 8491 type when Coding C8 LON

Cable Ø: metal flexible conduit 16 mm diameter

Insulation strip length: 10 mm

Sheat strip length: 800 mm

Material single conductor: H07Z-R halogen free

Use of a RCD mandatory

MST32i3, 3 poles

Length m Part No.

Coding:	■ C1 POWER	2.0	G5.431.0206.1
	3 poles / 3 wire	3.0	G5.431.0306.1
Application:	Mains 250 V	5.0	G5.431.0506.1
	32 A	7.0	G5.431.0706.1
	6.0 mm ²	9.0	G5.431.0906.1
		11.0	G5.431.1106.1
		13.0	G5.431.1306.1
		15.0	G5.431.1506.1



MST25i4, 4 poles

Length m Part No.

Coding:	■ C2	2.0	G5.441.0204.2
	4 poles / 4 wire	3.0	G5.441.0304.2
Application:	Mains 250 V +	5.0	G5.441.0504.2
	"high integrity	7.0	G5.441.0704.2
	earth"	9.0	G5.441.0904.2
	25 A	11.0	G5.441.1104.2
	4.0 mm ²	13.0	G5.441.1304.2
		15.0	G5.441.1504.2



MST20i3, 3 poles

Length m Part No.

Coding:	□ C3	2.0	G5.431.0203.3
	3 poles / 3 wire	3.0	G5.431.0303.3
Application:	Mains 250 V	5.0	G5.431.0503.3
	20 A	7.0	G5.431.0703.3
	2.5 mm ²	9.0	G5.431.0903.3
		11.0	G5.431.1103.3
		13.0	G5.431.1303.3
		15.0	G5.431.1503.3



MST20i3, 3 poles

Length m Part No.

Coding:	□ C3	2.0	G5.431.0204.3
	3 poles / 3 wire	3.0	G5.431.0304.3
Application:	Mains 250 V	5.0	G5.431.0504.3
	20 A	7.0	G5.431.0704.3
	4.0 mm ²	9.0	G5.431.0904.3
		11.0	G5.431.1104.3
		13.0	G5.431.1304.3
		15.0	G5.431.1504.3



MST20i4, 4 poles

Length m Part No.

Coding:	■ C4	2.0	G5.441.0203.4
	4 poles / 4 wire	3.0	G5.441.0303.4
Application:	Mains 250 V +	5.0	G5.441.0503.4
	emergency light	7.0	G5.441.0703.4
	20 A	9.0	G5.441.0903.4
	2.5 mm ²	11.0	G5.441.1103.4
		13.0	G5.441.1303.4
		15.0	G5.441.1503.4



MST20i4, 4 poles

Length m Part No.

Coding:	■ C4	2.0	G5.441.0204.4
	4 poles / 4 wire	3.0	G5.441.0304.4
Application:	Mains 250 V +	5.0	G5.441.0504.4
	emergency light	7.0	G5.441.0704.4
	20 A	9.0	G5.441.0904.4
	4.0 mm ²	11.0	G5.441.1104.4
		13.0	G5.441.1304.4
		15.0	G5.441.1504.4



MST20i5, 5 poles

Length m Part No.

Coding:	■ C5 DALI	2.0	G5.451.0203.5
	5 poles / 5 wire	3.0	G5.451.0303.5
Application:	DALI 250 V	5.0	G5.451.0503.5
	20 A	7.0	G5.451.0703.5
	2.5 mm ²	9.0	G5.451.0903.5
		11.0	G5.451.1103.5
		13.0	G5.451.1303.5
		15.0	G5.451.1503.5



MST20i6, 6 poles

Length m Part No.

Coding:	■ C6	2.0	G5.461.0203.6
	6 poles / 6 wire	3.0	G5.461.0303.6
Application:	DALI 250 V +	5.0	G5.461.0503.6
	emergency light	7.0	G5.461.0703.6
	20 A	9.0	G5.461.0903.6
	2.5 mm ²	11.0	G5.461.1103.6
		13.0	G5.461.1303.6
		15.0	G5.461.1503.6



MST20i5, 5 poles

Length m Part No.

Coding:	■ C7, 3 Phase	2.0	G5.451.0203.7
	5 poles / 5 wire	3.0	G5.451.0303.7
Application:	Mains 250 V /	5.0	G5.451.0503.7
	400 V	7.0	G5.451.0703.7
	20 A	9.0	G5.451.0903.7
	2.5 mm ²	11.0	G5.451.1103.7
		13.0	G5.451.1303.7
		15.0	G5.451.1503.7



MST20i6, 6 poles

Length m Part No.

Coding:	■ C8 LON	2.0	G5.461.0203.8
	6 poles / 6 wire	3.0	G5.461.0303.8
Application:	Mains 250 V	5.0	G5.461.0503.8
	20 A	7.0	G5.461.0703.8
	2.5 mm ²	9.0	G5.461.0903.8
		11.0	G5.461.1103.8
		13.0	G5.461.1303.8
		15.0	G5.461.1503.8





Components

Rated voltage:	250V / 250V/400V	Cable Ø:	metal flexible conduit 16 mm diameter
Rated impulse voltage:	4 kV	Cable:	Flex Drop S05HH-F
Degree of protection (IP):	IP20	Material single conductor:	H07Z-R halogen free
Cable material:	Cable LSOH as per BS7211 and Belden 8491 type when Coding C8 LON	Use of a RCD mandatory	

T Connector – Flex Drop



MST20i3, 3 poles

Length m Part No.

Coding:	☐ C3	0.5	G5.936.0543.3
	3 poles / 3 wire	1.0	G5.936.1043.3
Application:	Mains 250 V	1.5	G5.936.1543.3
	20 A		
	2.5 mm ²		



MST20i4, 4 poles

Length m Part No.

Coding:	☒ C4	0.5	G5.946.0542.4
	4 poles / 4 wire	1.0	G5.946.1042.4
Application:	Mains 250 V +	1.5	G5.946.1542.4
	emergency light		
	20 A		
	1.5 mm ²		



MST20i5, 5 poles

Length m Part No.

Coding:	☒ C5 DALI	0.5	G5.956.0542.5
	5 poles / 5 wire	1.0	G5.956.1042.5
Application:	DALI 250 V	1.5	G5.956.1542.5
	20 A		
	1.5 mm ²		



MST20i6, 6 poles

Length m Part No.

Coding:	☒ C6	0.5	G5.966.0542.6
	6 poles / 6 wire	1.0	G5.966.1042.6
Application:	DALI 250 V +	1.5	G5.966.1542.6
	emergency light		
	20 A		
	1.5 mm ²		



Part No. DALI G5.926.0542.5 ff.


T Connector – Conduit Drop



MST20i3, 3 poles

Length m Part No.


Coding:	☐ C3	0.5	G5.931.0593.3
	3 poles / 3 wire	1.0	G5.931.1093.3
Application:	Mains 250 V	1.5	G5.931.1593.3
	20 A	2.0	G5.931.2093.3
	2.5 mm ²	3.0	G5.931.3093.3
		4.0	G5.931.4093.3
		5.0	G5.931.5093.3



MST20i3, 3 poles

Length m Part No.

Coding:	☐ C3	0.5	G5.931.0593.3
	3 poles / 3 wire	1.0	G5.931.1093.3
Application:	Mains 250 V	1.5	G5.931.1593.3
	20 A	2.0	G5.931.2093.3
	4.0 mm ²	3.0	G5.931.3093.3
		4.0	G5.931.4093.3
		5.0	G5.931.5093.3



MST20i6, 6 poles

Length m Part No.

Coding:	☒ C8 LON	0.5	G5.956.0542.5
	6 poles / 6 wire	1.0	G5.956.1042.5
Application:	Mains 250 V	1.5	G5.956.1542.5
	20 A		
	2.5 mm ²		



T Connector – SPUR (tap off fused with 10 A*)



MST32i3, 3 poles

Length m Part No.

Coding:	☒ C1 POWER	1.0	G5.536.0103.1
	3 poles / 3 wire	2.0	G5.536.0203.1
Application:	Mains 250 V		
	32 A		
10 A fuse	2.5 mm ²		



MST20i3, 3 poles

Length m Part No.

Coding:	☐ C3	1.0	G5.536.0103.3
	3 poles / 3 wire	2.0	G5.536.0203.3
Application:	Mains 250 V		
	20 A		
10 A fuse	2.5 mm ²		



* Note: different size fuses can be purchased separately

Switch Module

Part No.

Coding:	1x C7/IN,		
	3x C7/OUT (distributor)	G5.800.0023.7	
	1x C6/IN, 1x C6/OUT,	G5.800.0044.6	
	1x C0/SWITCH, 1x C6/LIGHT		
	1x C6/IN, 2x C0/SWITCH,	G5.800.0063.6	
	1x C6/LIGHT		

Dust cap

Part No.



06.560.4153.0





Spain



from page

GST18i3 Pre-assembled cables

182

e-
Shop


More information
<http://eshop.wieland-electric.com>



Pre-assembled cables, 3-pole

1.5 mm²

Rated voltage:	250 V	Cable material, RZ1 0.6/1kV 3G1.5:	halogen free
Rated current:	16 A	The use of a locking device is mandatory.	
Rated impulse voltage:	4 kV	Locking device for flying leads: see Accessories GST18	
Degree of protection (IP):	IP20, IP40 when plugged		

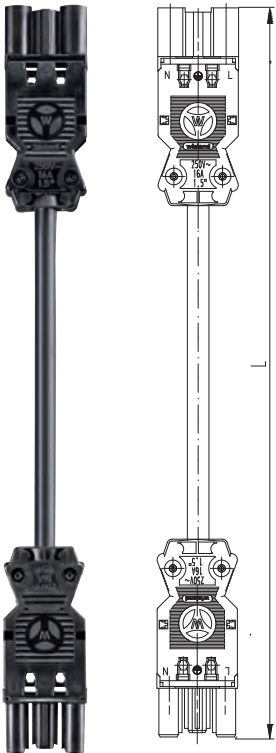

⊕ = GN/YE
N = BU
L = BN

Connecting cables female – male

RZ1 0.6/1kV 3G1.5

halogen free

Length m Part No.

Cable color:	■ black	■ black
Color of coding:	1	G2.232.1060.1
Pole marking:	2	G2.232.2060.1
Application:	3	G2.232.3060.1
	4	G2.232.4060.1
	5	G2.232.5060.1
	6	G2.232.6060.1
	7	G2.232.7060.1
	8	G2.232.8060.1

Cable color:	□ white	□ white
Color of coding:	1	G2.232.1060.2
Pole marking:	2	G2.232.2060.2
Application:	3	G2.232.3060.2
	4	G2.232.4060.2
	5	G2.232.5060.2
	6	G2.232.6060.2
	7	G2.232.7060.2
	8	G2.232.8060.2


Cable color:	■ black	■ green
Color of coding:	1	G2.232.1060.7
Pole marking:	2	G2.232.2060.7
Application:	3	G2.232.3060.7
	4	G2.232.4060.7
	5	G2.232.5060.7
	6	G2.232.6060.7
	7	G2.232.7060.7
	8	G2.232.8060.7



Pre-assembled cables, 3-pole

1.5 mm²

Rated voltage:	250 V	Cable material, RZ1 0.6/1kV 3G1.5:	halogen free
Rated current:	16 A	Sheath strip length:	37 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory. Locking device for flying leads: see Accessories GST18	

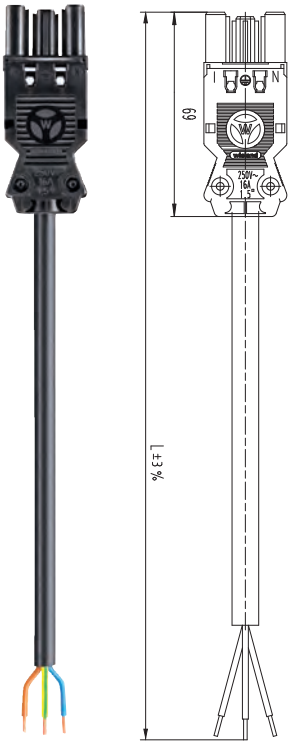

Connection cables female – free end
Wire ends ultrasonically welded

RZ1 0.6/1kV 3G1.5
halogen free
Part No.


		Length m	Part No.
Cable color:	■ black		
Color of coding:	■ black	1	G2.232.1063.1
Pole marking:	N, PE, L	2	G2.232.2063.1
Application:		3	G2.232.3063.1
		4	G2.232.4063.1
		5	G2.232.5063.1
		6	G2.232.6063.1
		7	G2.232.7063.1
		8	G2.232.8063.1
Cable color:	□ white		
Color of coding:	□ white	1	G2.232.1063.2
Pole marking:	N, PE, L	2	G2.232.2063.2
Application:		3	G2.232.3063.2
		4	G2.232.4063.2
		5	G2.232.5063.2
		6	G2.232.6063.2
		7	G2.232.7063.2
		8	G2.232.8063.2
Cable color:	■ black		
Color of coding:	■ black	1	G2.232.1063.7
Pole marking:	N, PE, L	2	G2.232.2063.7
Application:		3	G2.232.3063.7
		4	G2.232.4063.7
		5	G2.232.5063.7
		6	G2.232.6063.7
		7	G2.232.7063.7
		8	G2.232.8063.7



Pre-assembled cables, 3-pole

1.5 mm²

Rated voltage:	250 V	Cable material, RZ1 0.6/1kV 3G1.5:	halogen free
Rated current:	16 A	Sheath strip length:	37 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory. Locking device for flying leads: see Accessories GST18	

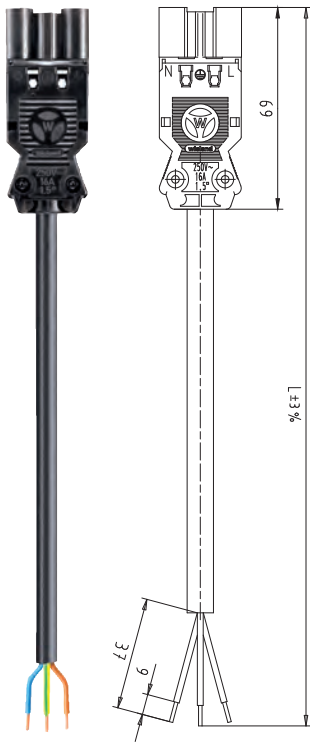

⊕ = GN/YE
N = BU
L = BN

Connection cable male – free end
Wire ends ultrasonically welded

RZ1 0.6/1kV 3G1.5
halogen free
Part No.

Length m

Cable color:	■ black	1	■ black	G2.232.1064.1
Color of coding:	■ black	2	■ black	G2.232.2064.1
Pole marking:	L, PE, N	3	■ black	G2.232.3064.1
Application:		4	■ black	G2.232.4064.1
		5	■ black	G2.232.5064.1
		6	■ black	G2.232.6064.1
		7	■ black	G2.232.7064.1
		8	■ black	G2.232.8064.1

Cable color:	□ white	1	□ white	G2.232.1064.2
Color of coding:	□ white	2	□ white	G2.232.2064.2
Pole marking:	L, PE, N	3	□ white	G2.232.3064.2
Application:		4	□ white	G2.232.4064.2
		5	□ white	G2.232.5064.2
		6	□ white	G2.232.6064.2
		7	□ white	G2.232.7064.2
		8	□ white	G2.232.8064.2

Cable color:	■ black	1	■ green	G2.232.1064.7
Color of coding:	■ black	2	■ green	G2.232.2064.7
Pole marking:	L, PE, N	3	■ green	G2.232.3064.7
Application:		4	■ green	G2.232.4064.7
		5	■ green	G2.232.5064.7
		6	■ green	G2.232.6064.7
		7	■ green	G2.232.7064.7
		8	■ green	G2.232.8064.7



Pre-assembled cables, 3-pole

2.5 mm²

Rated voltage:

Rated current:

Rated impulse voltage:

Degree of protection (IP):

250 V

20 A

4 kV


IP20, IP40 when plugged

Cable material, RZ1 0.6/1kV 3G2.5:

halogen free

The use of a locking device is mandatory.

Locking device for flying leads: see Accessories GST18

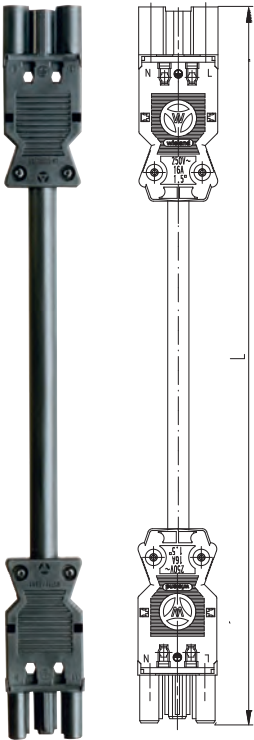

⊕ = GN/YE
N = BU
L = BN

Connecting cables female – male


		RZ1 0.6/1kV 3G2.5	
		halogen free	
		Length m	Part No.
Cable color: Color of coding: Pole marking: Application:	■ black L, PE, N	1	■ black G2.238.1060.1
		2	G2.238.2060.1
		3	G2.238.3060.1
		4	G2.238.4060.1
		5	G2.238.5060.1
		6	G2.238.6060.1
		7	G2.238.7060.1
		8	G2.238.8060.1
Cable color: Color of coding: Pole marking: Application:	□ white L, PE, N	1	□ white G2.238.1060.2
		2	G2.238.2060.2
		3	G2.238.3060.2
		4	G2.238.4060.2
		5	G2.238.5060.2
		6	G2.238.6060.2
		7	G2.238.7060.2
		8	G2.238.8060.2
Cable color: Color of coding: Pole marking: Application:	■ black L, PE, N	1	■ green G2.238.1060.7
		2	G2.238.2060.7
		3	G2.238.3060.7
		4	G2.238.4060.7
		5	G2.238.5060.7
		6	G2.238.6060.7
		7	G2.238.7060.7
		8	G2.238.8060.7





Pre-assembled cables, 3-pole, 2.5 mm²

2.5 mm ²			
Rated voltage:	250 V	Cable material, RZ1 0.6/1kV 3G2.5:	halogen free
Rated current:	20 A	Sheath strip length:	37 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
		Locking device for flying leads: see Accessories GST18	

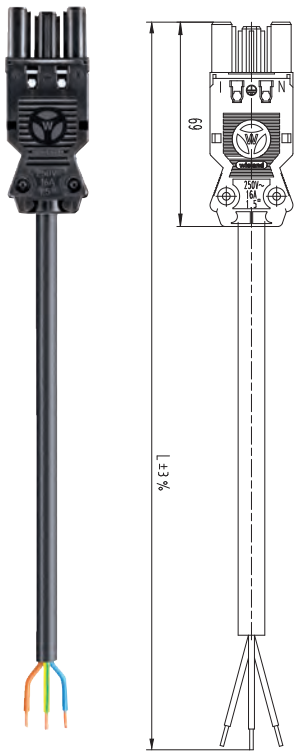

Connection cables female – free end
Wire ends ultrasonically welded


RZ1 0.6/1kV 3G2.5
halogen free
Part No.

		Length m	
Cable color: black			
Color of coding:	■ black	1	G2.238.1063.1
Pole marking:	N, PE, L	2	G2.238.2063.1
Application:		3	G2.238.3063.1
		4	G2.238.4063.1
		5	G2.238.5063.1
		6	G2.238.6063.1
		7	G2.238.7063.1
		8	G2.238.8063.1
Cable color: white			
Color of coding:	□ white	1	G2.238.1063.2
Pole marking:	N, PE, L	2	G2.238.2063.2
Application:		3	G2.238.3063.2
		4	G2.238.4063.2
		5	G2.238.5063.2
		6	G2.238.6063.2
		7	G2.238.7063.2
		8	G2.238.8063.2
Cable color: green			
Color of coding:	■ black	1	G2.238.1063.7
Pole marking:	N, PE, L	2	G2.238.2063.7
Application:		3	G2.238.3063.7
		4	G2.238.4063.7
		5	G2.238.5063.7
		6	G2.238.6063.7
		7	G2.238.7063.7
		8	G2.238.8063.7




Pre-assembled cables, 3-pole, 2.5 mm²

2.5 mm ²			
Rated voltage:	250 V	Cable material, RZ1 0.6/1kV 3G2.5:	halogen free
Rated current:	20 A	Sheath strip length:	37 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Degree of protection (IP):	IP20, IP40 when plugged	The use of a locking device is mandatory.	
		Locking device for flying leads: see Accessories GST18	

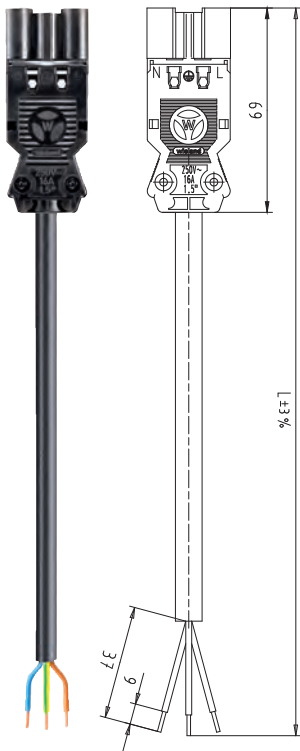

Connection cable male – free end
Wire ends ultrasonically welded

		RZ1 0.6/1kV 3G2.5 halogen free	
		Length m	Part No.
Cable color: Color of coding: Pole marking: Application:	■ black	1	G2.238.1064.1
		2	G2.238.2064.1
		3	G2.238.3064.1
		4	G2.238.4064.1
		5	G2.238.5064.1
		6	G2.238.6064.1
		7	G2.238.7064.1
		8	G2.238.8064.1
Cable color: Color of coding: Pole marking: Application:	□ white	1	G2.238.1064.2
		2	G2.238.2064.2
		3	G2.238.3064.2
		4	G2.238.4064.2
		5	G2.238.5064.2
		6	G2.238.6064.2
		7	G2.238.7064.2
		8	G2.238.8064.2
Cable color: Color of coding: Pole marking: Application:	■ black	1	G2.238.1064.7
		2	G2.238.2064.7
		3	G2.238.3064.7
		4	G2.238.4064.7
		5	G2.238.5064.7
		6	G2.238.6064.7
		7	G2.238.7064.7
		8	G2.238.8064.7

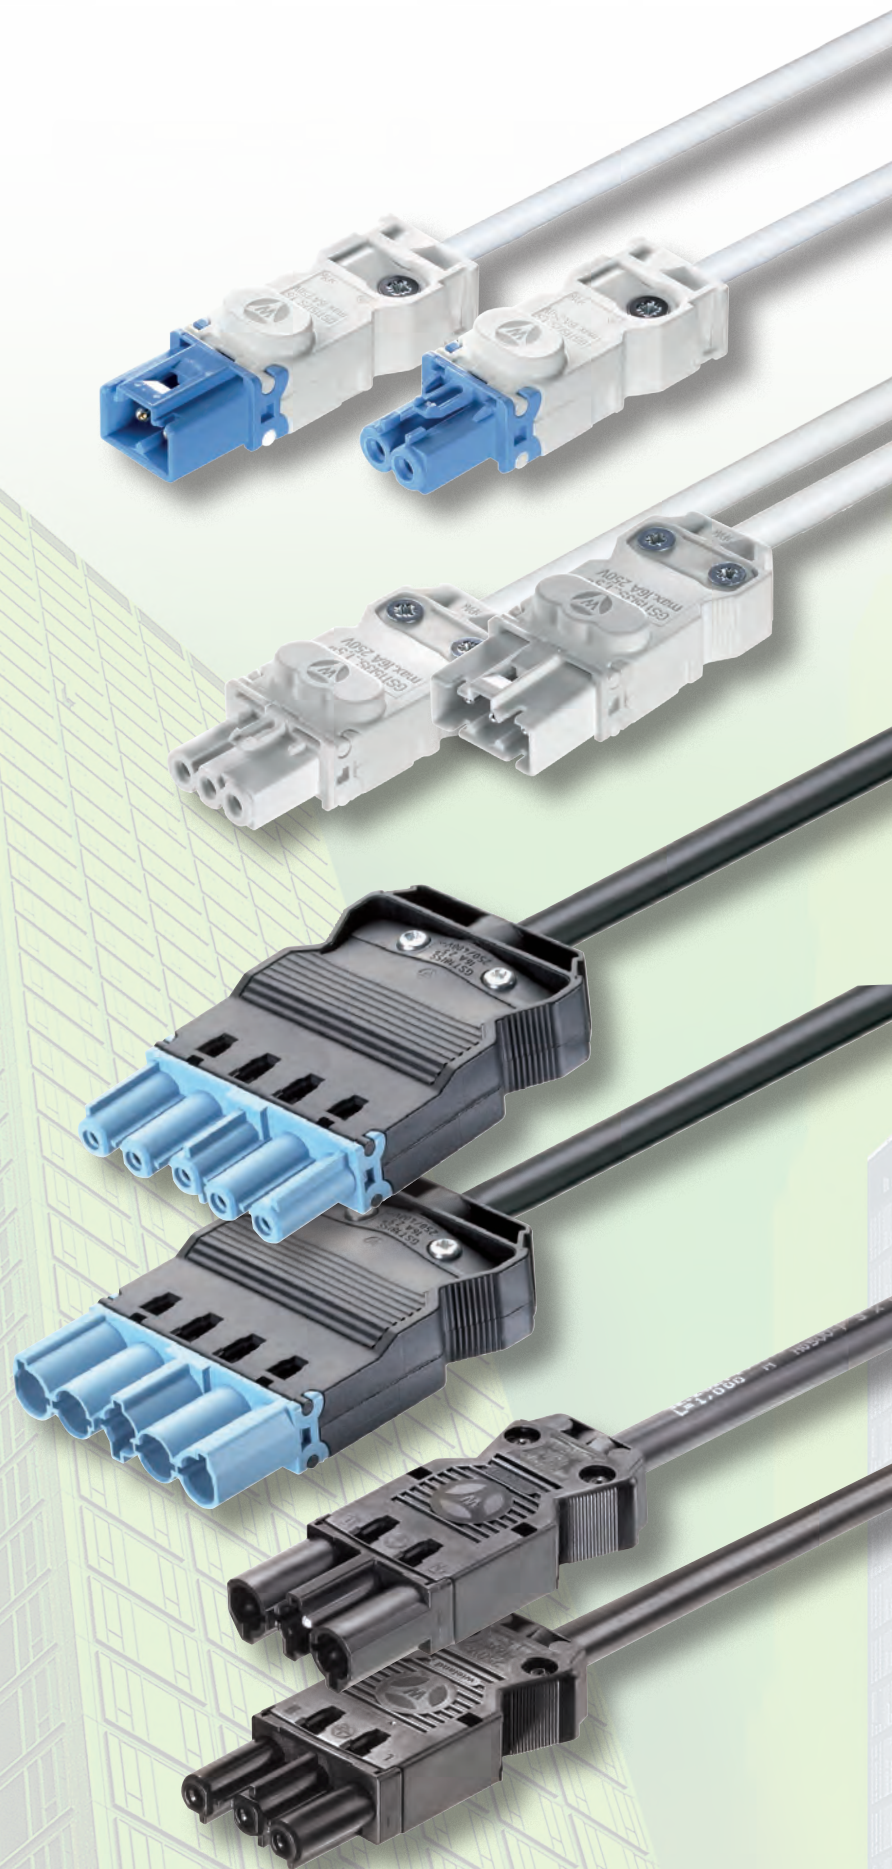

	from Page
General technical data	190
Safety instructions	192
Installation instructions	
gesis[®]CLASSIC	193
Switching distributor	202
gesis[®]MINI	204
gesis[®]NRG	207
Technical data	
gesis[®]CLASSIC	212
gesis[®]TOP	215
gesis[®]MINI	216
gesis[®]MICRO	218
gesis[®]NV	220
gesis[®]NRG	224



Definition of our numerical code

A logical structure makes ordering easy

Our numerical code saves time and effort when ordering our cables. Your needs can be compiled quickly and efficiently, particularly in our eShop, but also using conventional means. The way it works is simple and refers to our part numbers, which have a consistent structure. Your product can be ordered in just a few steps.

Example: 92.232.3000.1, mains cable 3 G 1.5 mm², length 3.0 m, cable PVC H05VV configuration male – female, code 1 (mains black)

		92.	232.	30	0	0.	1
Connector system	gesis MINI (GST15)	91.					
	gesis CON (GST18)	92.					
	gesis CON (BST)	94.					
Cable type and diameter		in connector system					
Mains cable 4 G	1.5 mm ²	GST15i4, 18i4	207.				
Mains cable 4 G	2.5mm ²	GST18i4	208.				
Mains cable 2 x	1.5 mm ²	GST15i2	222.				
Mains cable 3 G	1.5 mm ²	GST15i3, 18i3	232.				
Mains cable 3 G	2.5mm ²	GST18i3	238.				
Mains cable 5 G	1.5 mm ²	GST15i5, 18i5	257.				
Mains cable 5 G	2.5mm ²	GST18i5	258.				
Bus cable 2x	0.5 mm ²	BST14i2	425.				
Bus cable 2x2	0.8 mm ²	BST14i3	435.				
Length							
Length incl. female / male connector up to 10 m in dm (example: 3.0 m = 30 dm)				30			
Cable material		in connector system					
H05VV-F (PVC)	GST			0			
H05V2V2 (PVC, 90 °C continuous temperature)	GST			1			
H07 RN-F (rubber)	GST			3			
H05Z1Z1-F (halogen-free)	GST			6			
Pre-assembly							
Extension	Male – female			0.			
Extension	Male – female screen to PE			2.			
Connection cable	Female – free end			3.			
Connection cable	Male – free end			4.			
Connection cable	Female – free end screen to PE			5.			
Connection cable	Male – free end screen to PE			6.			
Feed cable	Earth contact plug – female			7.			
Adapter cable	Female – male			9.			
Colors and codings male – female		in connector system					
tomato red	GST18i3 ...i5			0			
black	GST18i3 ...i5, GST15i2...i5			1			
white	GST18i3 ...i5, GST15i2...i5			2			
pebble gray	GST18i3 ...i4, GST15i2			3			
brown	GST18i3, GST15i3			4			
salmon red	GST18i3			5			
light blue	GST15i2			6			
may green	GST18i3 ...i5			7			
turquoise	GST18i3 ...i5			8			
pastel blue	BST14i2, GST18i5, GST15i2...i5			9			

		90.	200.	10	2	4.	2
Connector system	gesis MICRO (GST08)	90.					
Cable type and diameter / coding							
Mains cable 2 G	0.75 mm ² / blue			200.			
Mains cable 2 G	0.75 mm ² / green			210.			
Mains cable 2 G	0.5 mm ² / green			215.			
Mains cable 2 G	0.75 mm ² / yellow			220.			
Mains cable 2 G	0.75 mm ² / white			230.			
Mains cable 3 G	0.75 mm ² / white			240.			
Length							
Length incl. female/male connector up to 10m in dm (example: 1.0 m = 10 dm)				10			
Cable material							
H03VV-F	PVC			0			
H03VVH2-F	PVC			1			
H03V2V2H2-F	PVC (90° continuous temperature)			2			
LIYZ	PVC			3			
H03Z1Z1H2-F	halogen-free			4			
Pre-assembly							
Extension	Female - male			0.			
Feed	Female - free end			3.			
Feed	Male - free end			4.			
Adapter cable	Female - male GST15			5.			
Extension	Male - distributor			6.			
Feed	Free end - distributor			7.			
Cable color							
black				1			
white				2			



Cable cross sections / AWG

The approximated relationship between cable cross sections in mm² and AWG sizes is defined as follows:

AWG	Cross section mm ²	Metric equivalent mm ²
22	0.32	0.34
20	0.52	0.75
18	0.82	1.0
16	1.31	1.5
14	2.08	2.5
12	3.31	4.0
10	5.26	6.0
8	8.37	10.0
6	13.3	16.0

Non-SELV systems:

When laying supply and signal cables together, the highest occurring supply voltage must be coordinated (250 V, as a rule). Examples include SMI, Touch DIM, and DALI. There must be no possible confusion with SELV and PELV.

SELV/PELV systems:


The GST18 light blue, GST15 light blue (e.g. the binary inputs of the **gesis**[®]FLEX), and BST14i2 (e.g. KNX) connector systems must be used as plug connectors for SELV/PELV systems. There must be no possible confusion with FELV.

Overview of wire colors (cable assemblies)

Brown coding: Sheath strip length open end: 100 mm
Insulation strip length open end: 12 mm

Other codings: Sheath strip length open end: 37 mm
Insulation strip length open end: 9 mm

GST15i2 / GST08i2	
Standard	N=blue, L=brown
Special variant pastel blue coding	D2=blue, D1=brown
GST18i3 / GST15i3 / GST08i3	
Standard	PE=green/yellow, N=blue, L=brown
Special variant brown coding	1=black, 2/N=gray, 3/L=brown
GST18i4 / GST15i4	
Standard	PE=green/yellow, N=blue, 1=brown, 2=black
GST18i5 / GST15i5	
Standard	PE=green/yellow, N=blue, 1=brown, 2=black, 3=gray
Special variant pastel blue coding	PE=green/yellow, N=blue, L=brown, D2=black, D1=gray
GST18i6	
Standard	PE=green/yellow, N=blue, L=brown, L'=black, D1=red, D2=white

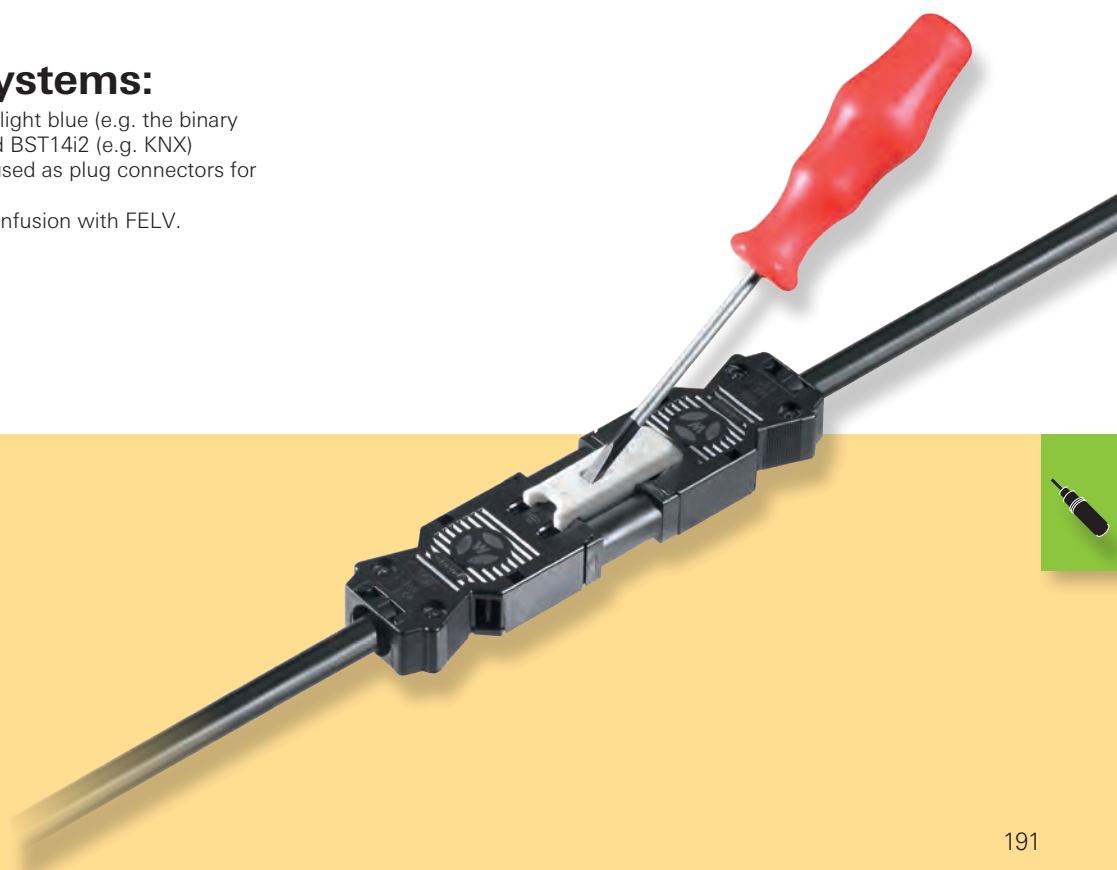

Safety instructions

The use of identical codings with different labeling and/or color marking is permissible provided that there is absolutely no possibility of any dangerous connection between female and male connectors.

The installer / planner must ensure and assume responsibility for ensuring that there can be no mix-up resulting in a dangerous situation. One way of achieving this, with different voltage levels, is through physical separation during the on-site installation.

Corresponding warnings are required in the technical documentation. These must include examples of possible errors and their consequences.

Safety instructions:

Please note that if male and female connectors are connected wrongly, dangerous situations such as

- **voltage transfer**
 - **risk of electric shock**
 - **destruction of equipment**
- may occur as a result.**

Always observe the following:

The erection, extension, and modification of electrical installations may only be carried out by qualified electricians. GST18 installation connectors to IEC 61535 are intended for installation by instructed or skilled persons. Applicable installation instructions as well as accident prevention and safety regulations must be observed.

Rules to be observed during installation:


Each color of a GST18 plug connector stands for a specific mechanical coding. Only female and male connectors with the same color can be mated. The only exception to this rule are black/white or gray/tomato red plug connectors, which have the same coding. In accordance with the installation manual, interlocking devices must always be used. These devices are integrated into GST18 distributors and snap-in connectors. In cable assemblies with flying leads, soldered parts, or flat cable adapters, interlocks have to be retrofitted manually (see Accessories). The interlocking device must click audibly into place.

Connection and termination points, as well as plug-in connections of cables/conductors, must be provided with mechanical strain relief as per VDE 0100-520. Never use force to plug or unplug gesis connectors. To open interlocking devices, use a tool such as a screwdriver; the connectors can now be unplugged easily.

Never connect or disconnect GST18 connectors under load. Do not use third-party components. Only combinations of Wieland products are covered by the warranty.

Safety instructions

Not permitted:



Permitted:


230V



50V





Not permitted:

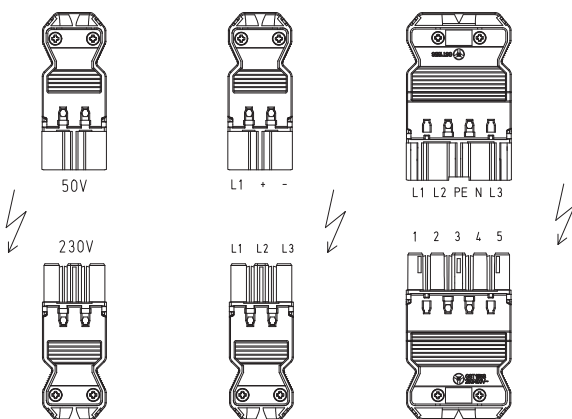

GST18i3...i6 connector installation instructions.

Plug connector with screw connection

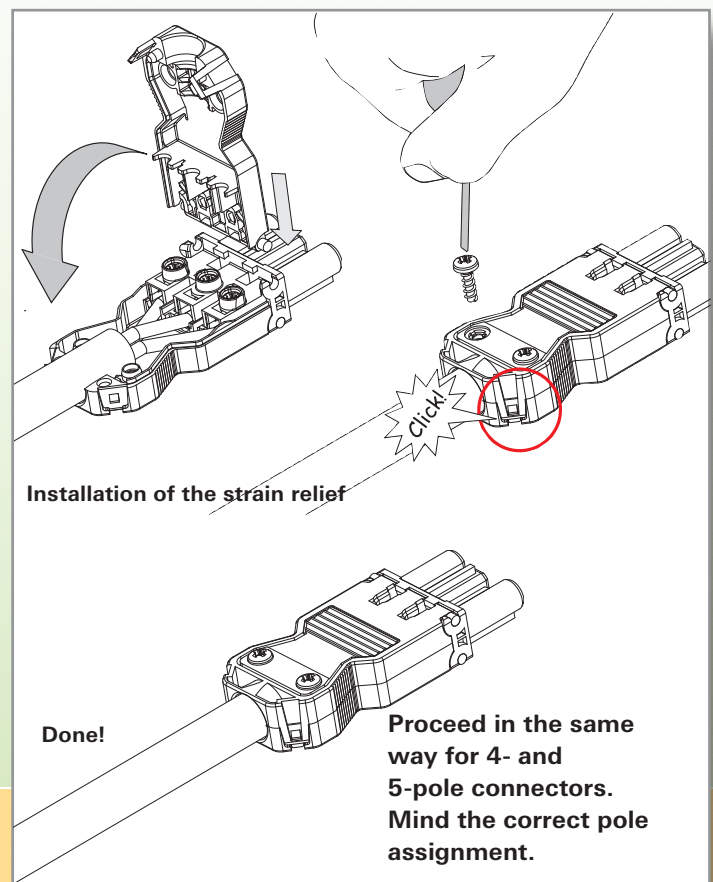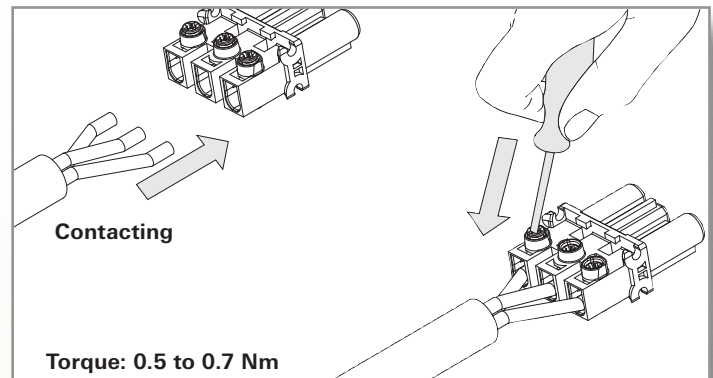

GST18i3...i6 connector installation instructions.

Plug connector with screw connection


Preparing the conductors

All dimensions in mm.


Solid or fine-stranded 0.75 – 2.5 mm² wires, high strain relief for up to 4 mm², without ferrule

Low strain relief


GST18i3




GST18i4



GST18i5




GST18i6

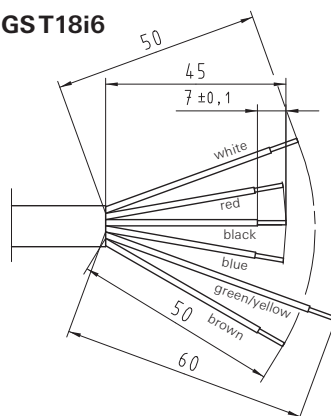


High strain relief

GST18i3

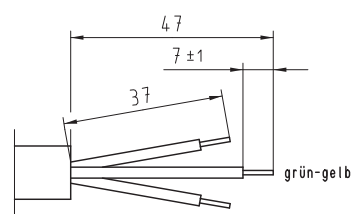

GST18i5

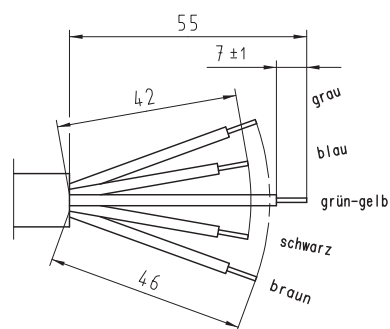


Spring-loaded plug connectors One cable

Preparing the conductors, all dimensions in mm.

Solid 1.5 – 2.5 mm² wires

Fine-stranded 1.5 mm² wires with ferrule





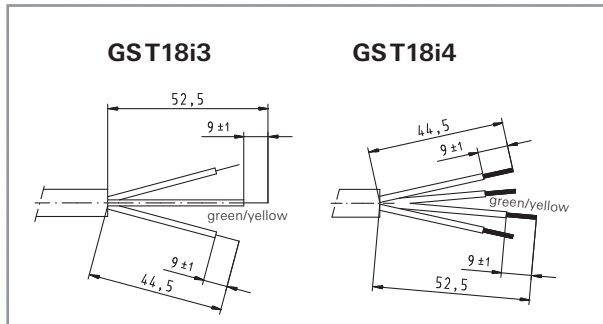


Spring-loaded plug connectors Two cables

Preparing the conductors, all dimensions in mm.

Solid 1.5 – 2.5 mm² wires

Fine-stranded 1.5 mm² wires with ferrule

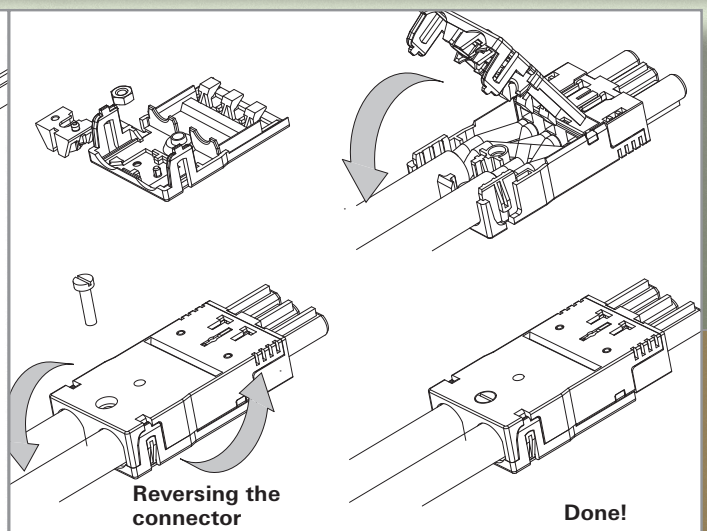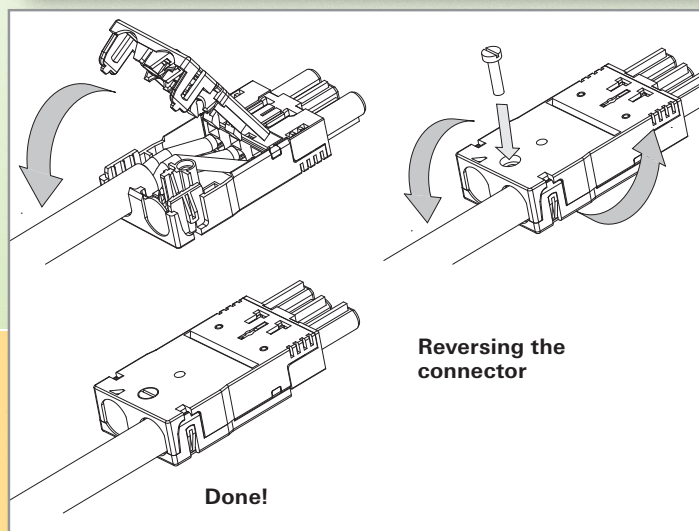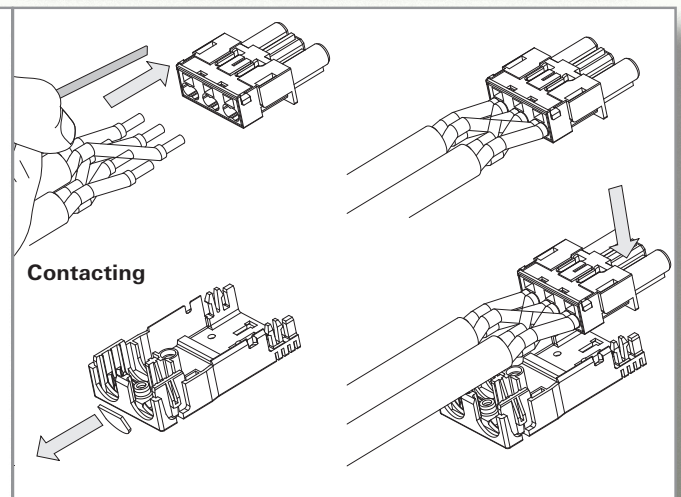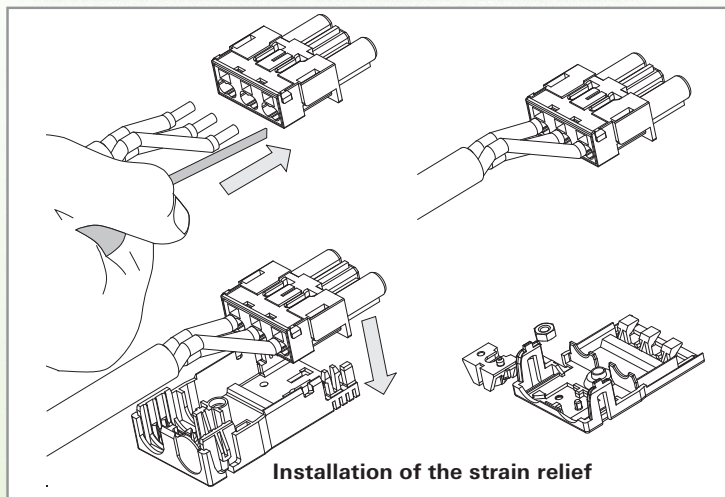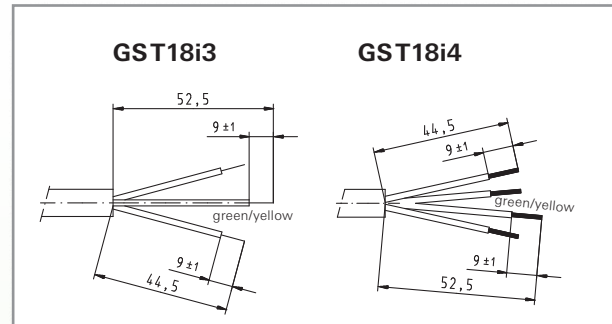


Proceed in the same way for 4-pole connectors.
Mind the correct pole assignment.

GST18i3...i6 installation instructions

Screw connection / spring-loaded connection interlock


(proceed in the same way for distributors, snap-ins, and soldered parts)

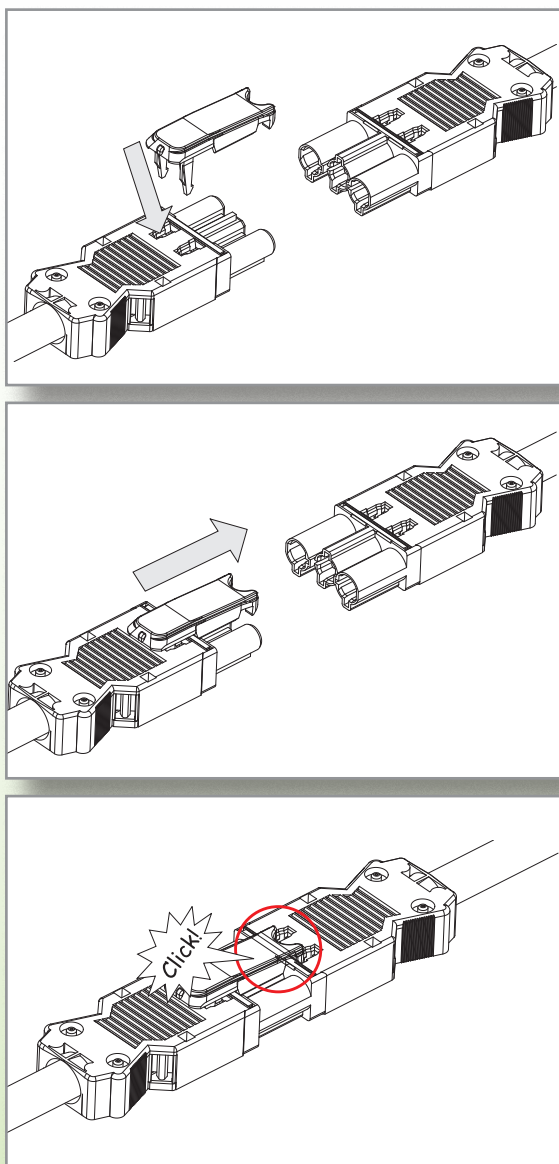


Soldered parts

GST 18 drilling plans


GST18i3



GST18i4

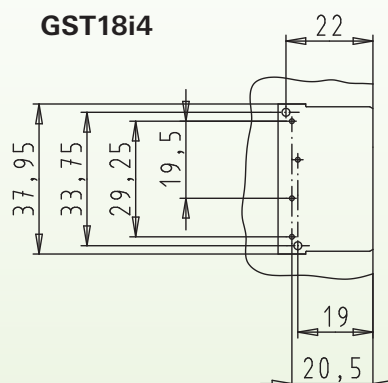

GST18i5

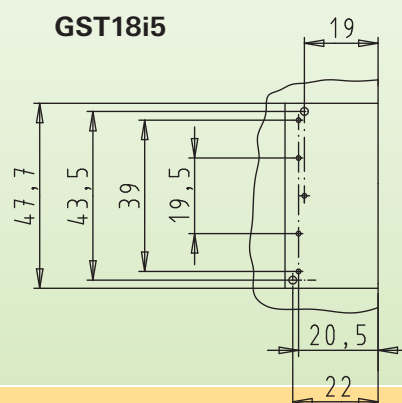


Please note:

To release locked flying leads, distributors, snap-ins, device connectors, and soldered parts, raise the interlock using a suitable flat screwdriver and disconnect the connector.



GST18i3...i6 installation instructions

Snap-in installation

Insulation strip length 0.5 - 1.5 mm²: 8 mm
Insulation strip length 2.5 mm²: 9 mm
Identical for device connectors

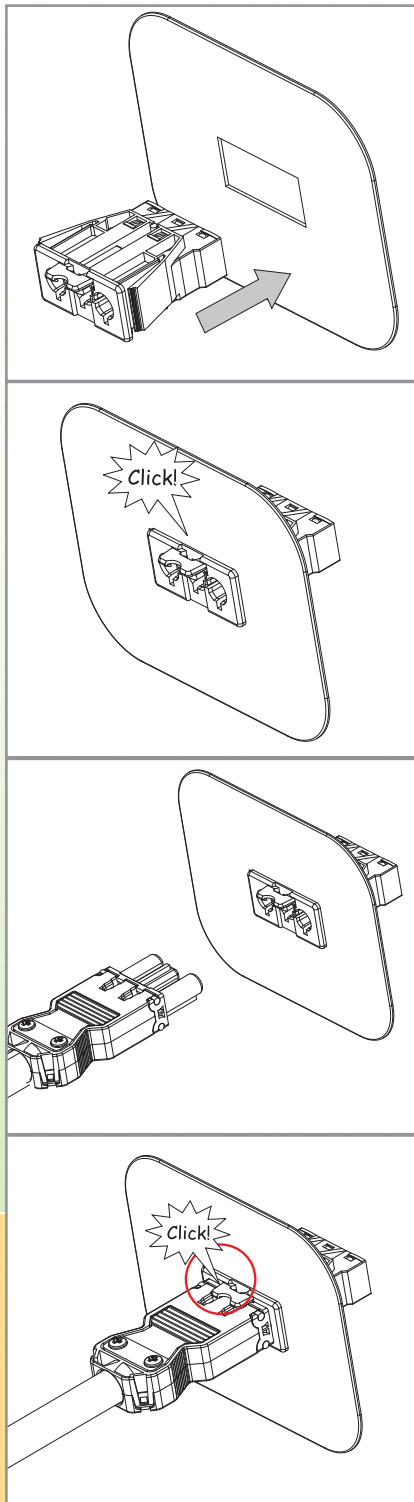

Use of distribution blocks

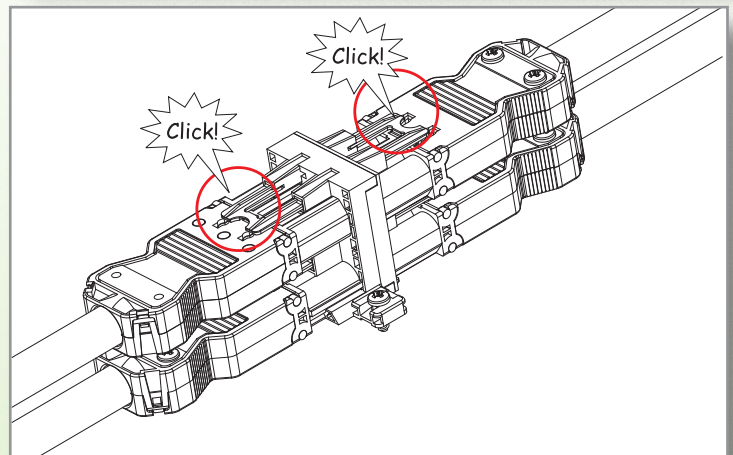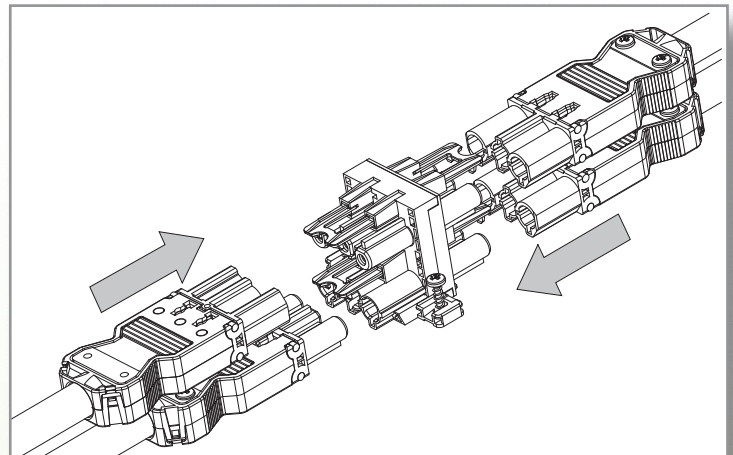

Please note:

In h and T distributors, one output each does **not** have an interlocking device.


This output is used for plugging directly into device connectors. If you use this output for a cable assembly, for example, a separate interlocking device (accessory) must be used.

NOTE: For a plug connector that is not enclosed, protection against electric shocks is provided by the housing of the equipment in which the connector is installed, in accordance with the applicable product safety standard.




GST18i3...i6 installation instructions

Cascading, prior removal of the slidelock, with screwdriver

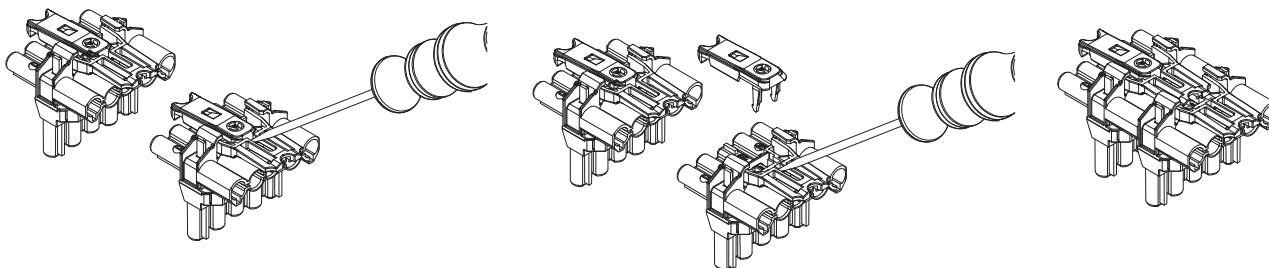


Use with field connection piece at the lower output, additional slidelock

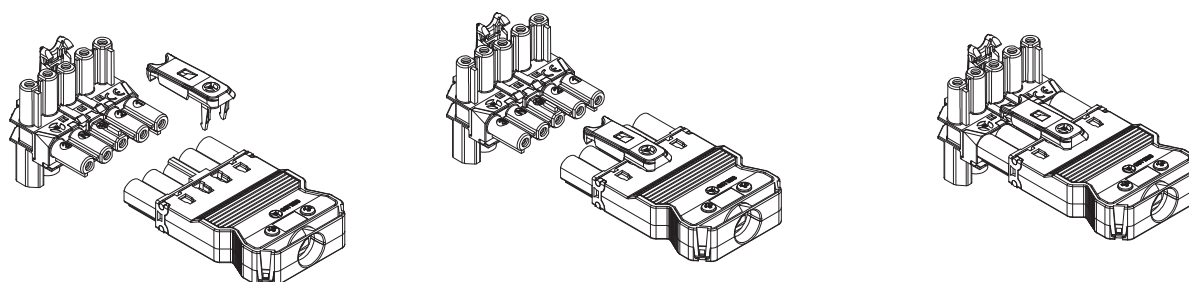

GST18i3 installation instructions

IDC adapter assembly instruction

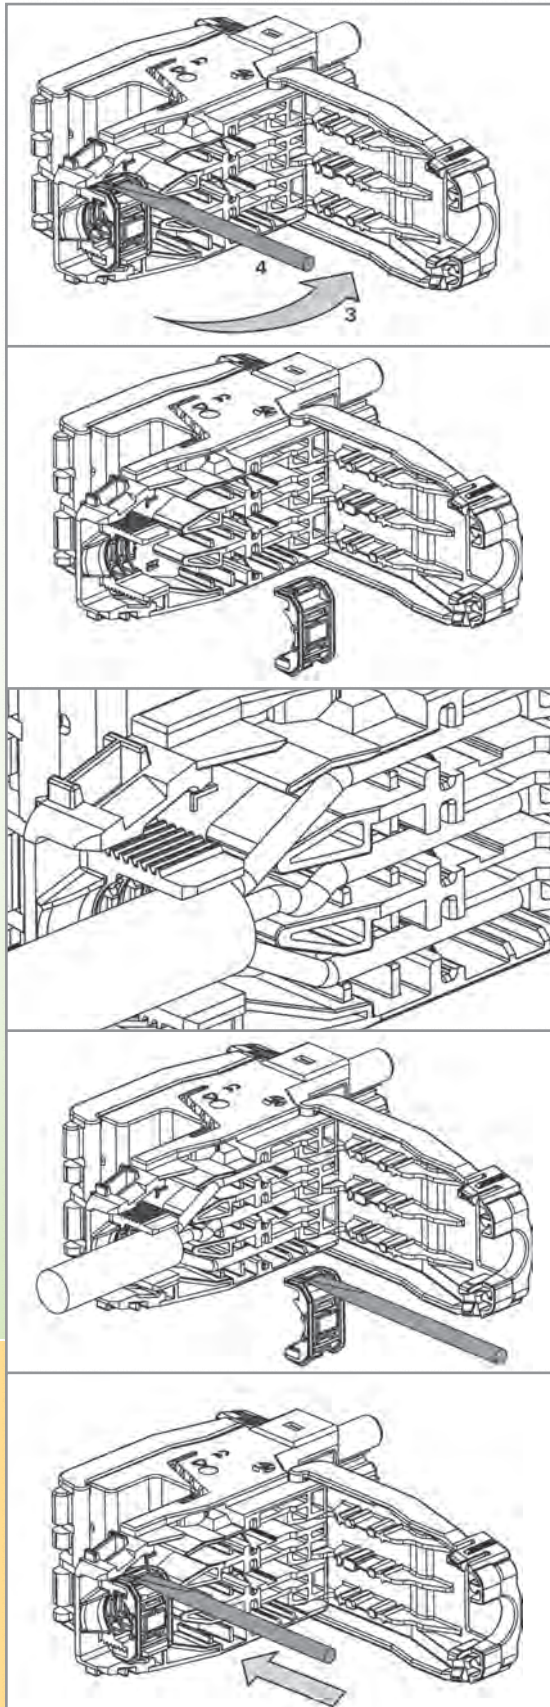

1. Cut cable at the desired point
2. Strip both ends of the cable by 35 mm
3. Open the cover
4. Undo the strain relief using a screwdriver

5. Insert conductors into guide slots
(mind the correct pole assignment!)

Detail

6. Insert the strain relief
Press firmly into place with a screwdriver




7. Close the cover
8. Repeat the above steps on the back of the adapter
9. Connect the GST 18i3 cable, use the interlocking device


GST18i5 distribution unit mounting plate

Mounting plate with screws


Assembly on mounting plate, direction 1

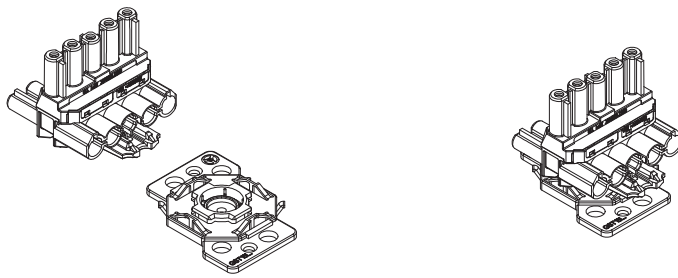

Assembly on mounting plate, direction 2

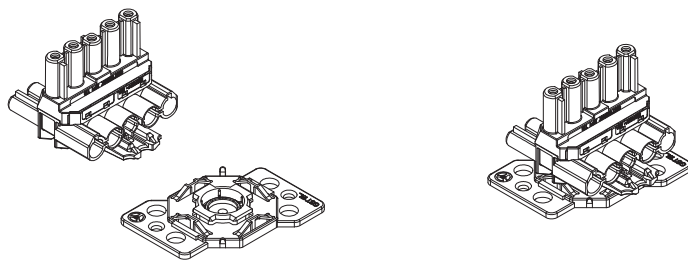


Removal from mounting plate, with screwdriver

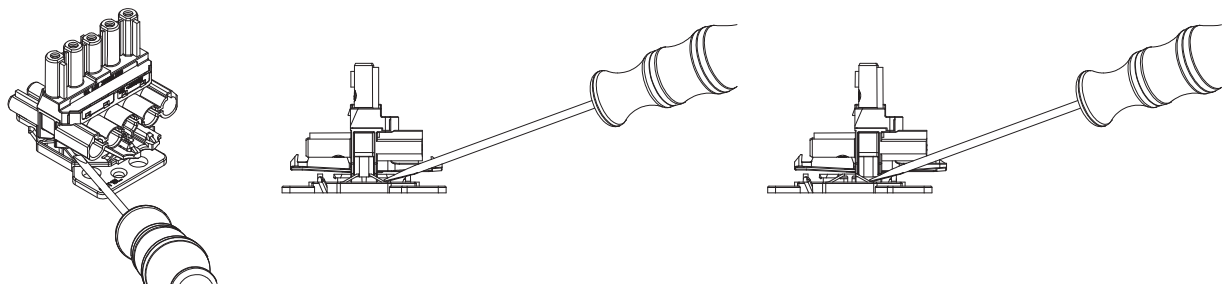


GST18i5 distribution unit mounting plate

Mounting plate with screws

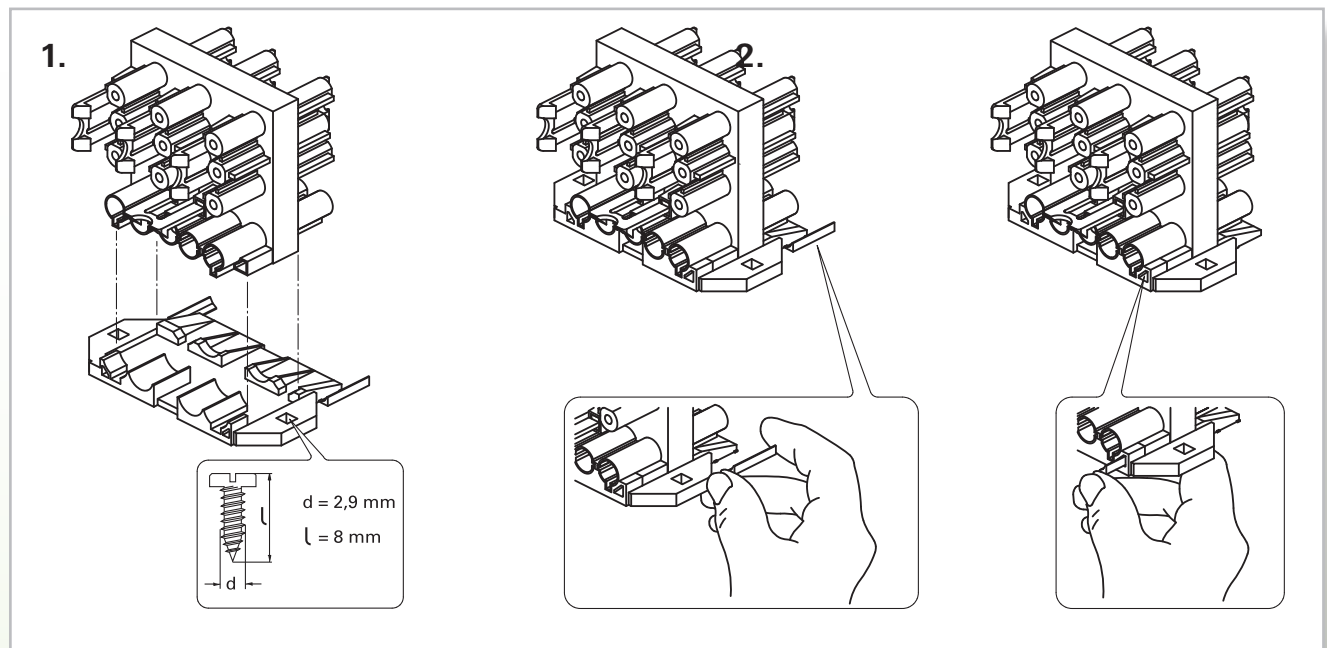

Snap-on mounting plate

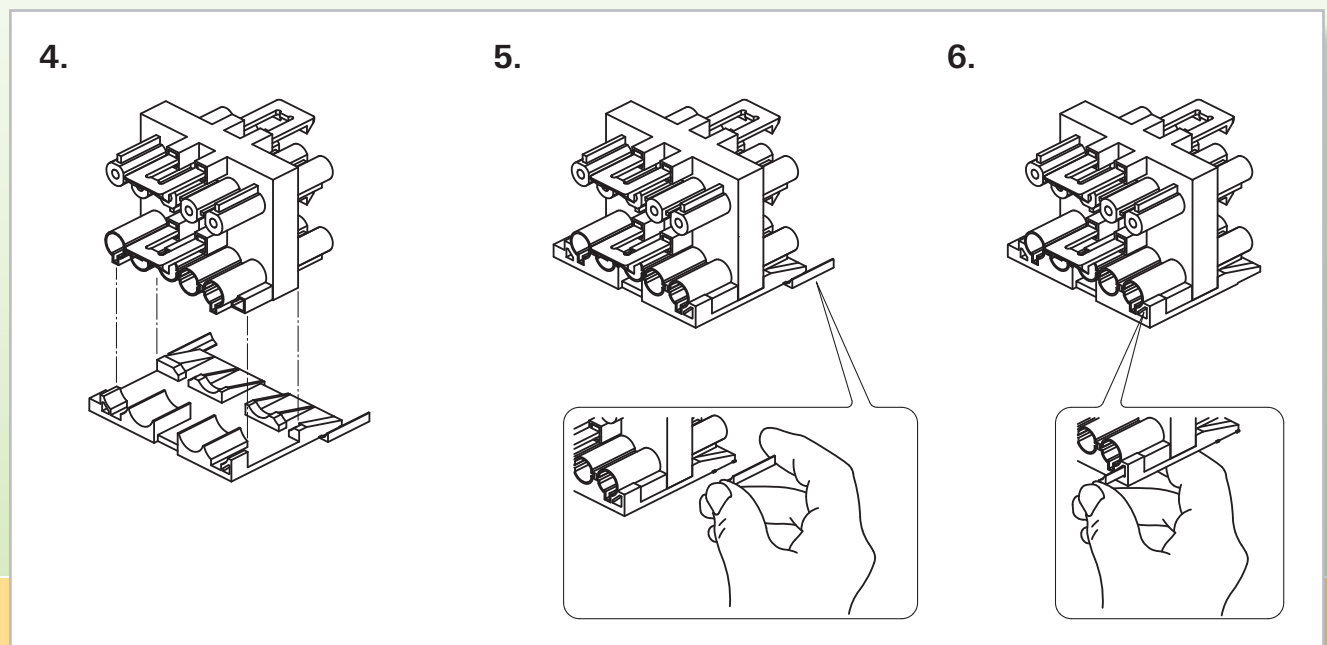

Mounting plate with screws





1. Place distributor on mounting plate
2. Break the locking pin off
3. Push the locking pin in

Snap-on mounting plate

4. Place distributor on mounting plate
5. Break the locking pin off
6. Push the locking pin in




Connection diagrams
Distributors

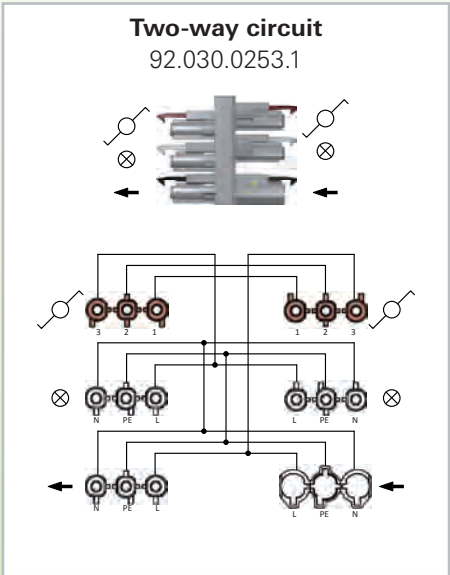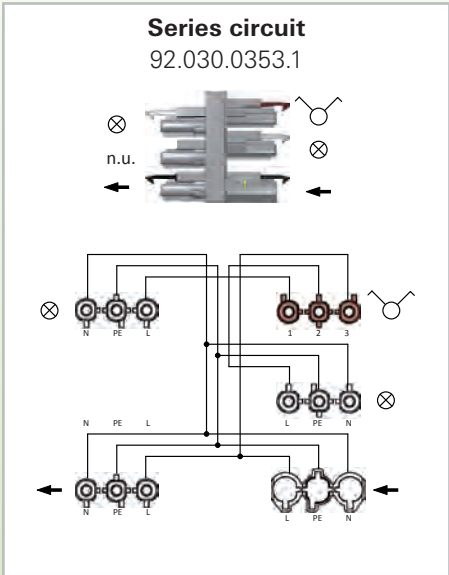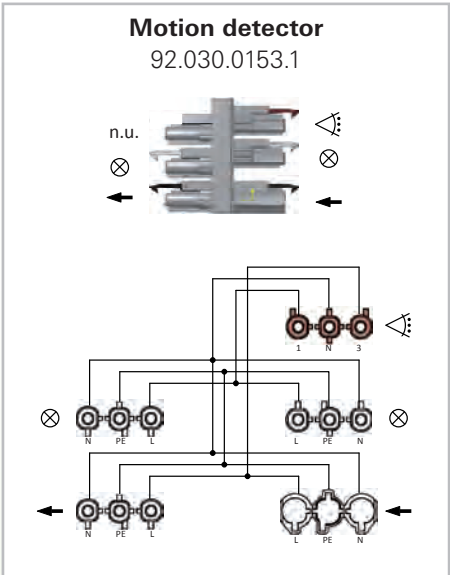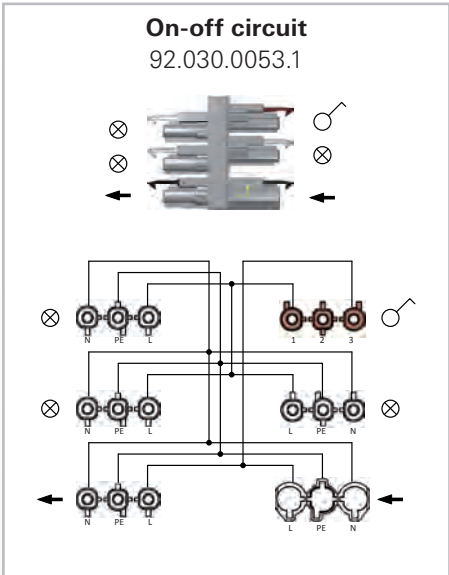




GST15i2...i5 installation instructions

Straight design

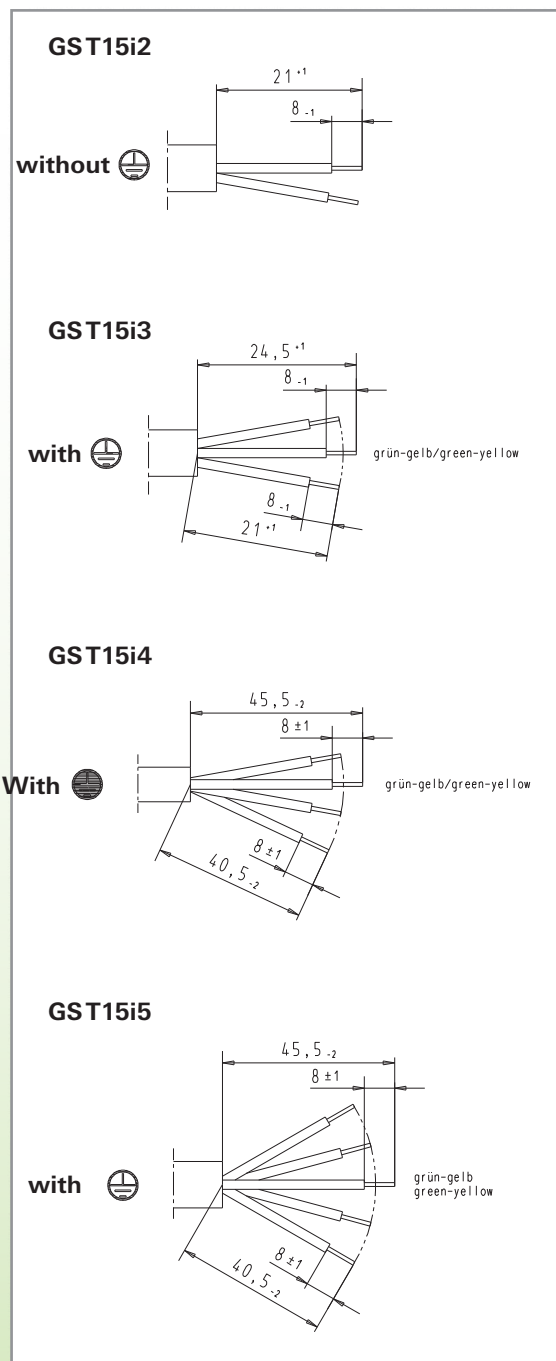


**Solid and fine-stranded connection
cross sections: 0.5 - 2.5 mm²**


Angled design

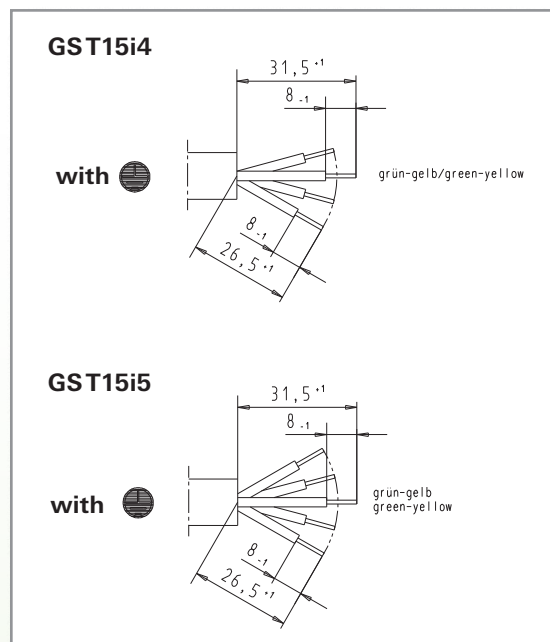


Insert conductor ends

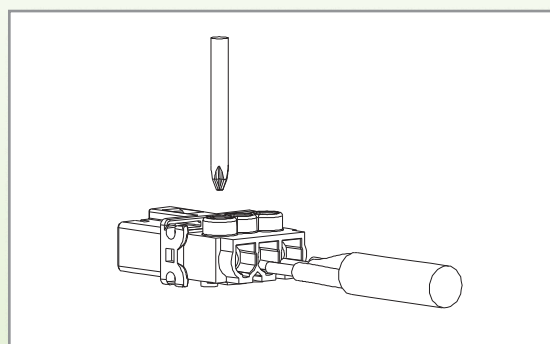

Final assembly

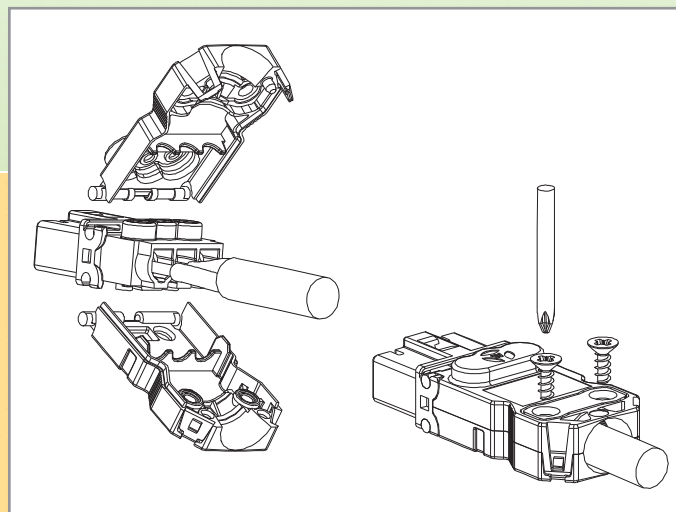

GST15i2...i5 installation instructions – snap-in

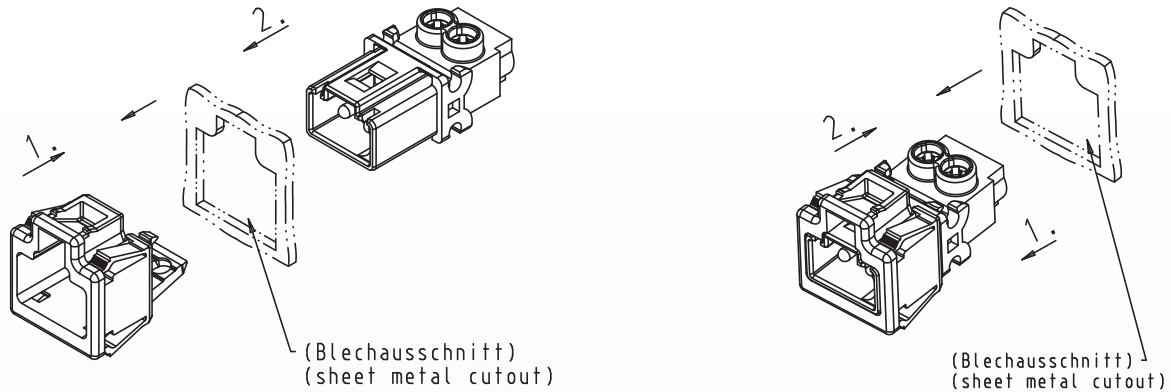

NOTE:

For a plug connector that is not enclosed, protection against electric shocks is provided by the housing of the equipment in which the connector is installed, in accordance with the applicable product safety standard.




GST15i2...i5 drilling patterns – soldered parts

2-pole




3-pole

4/5-pole

Female connector vertical

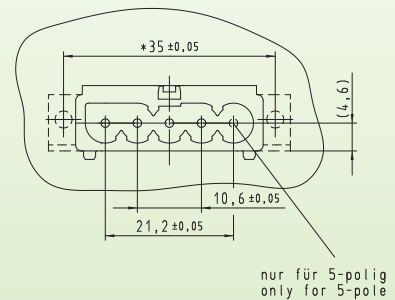


Male connector vertical

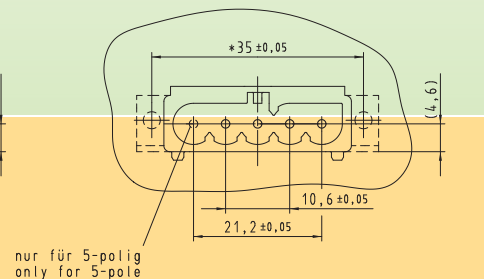


GST15i2...i5 drilling patterns – soldered parts

Female connector horizontal


2-pole

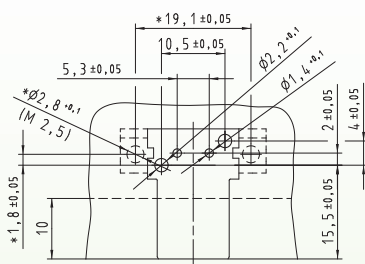

3-pole

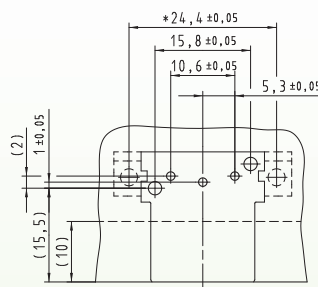


4/5-pole

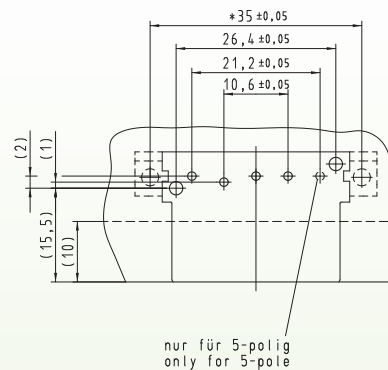


Male connector horizontal


2-pole

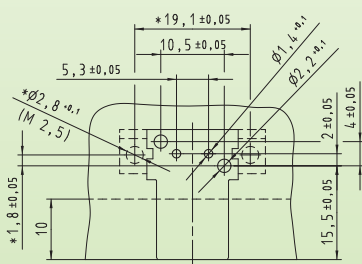

3-pole







4/5-pole

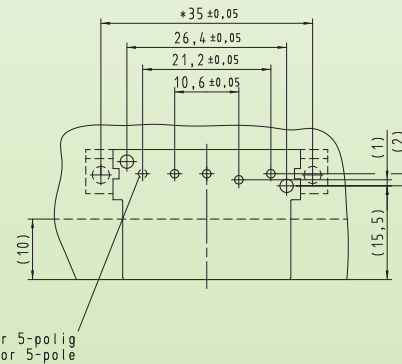

Installation instructions

Flat cable system, 5/5+2-pole

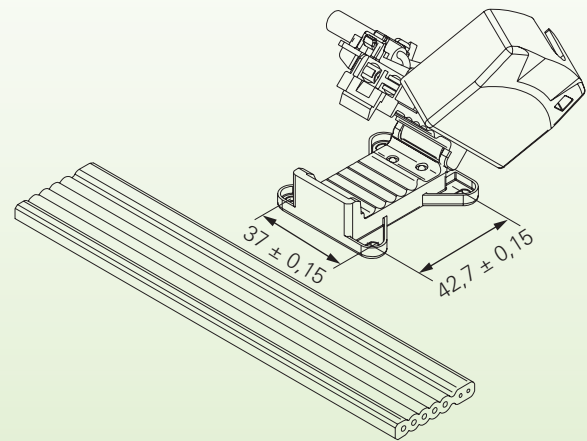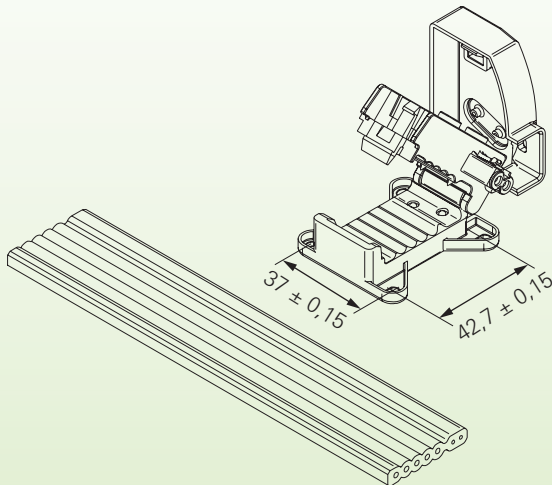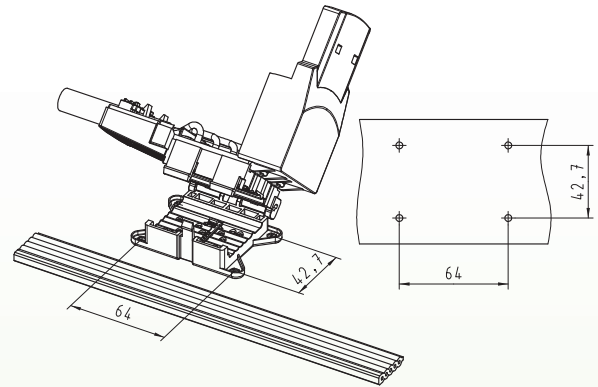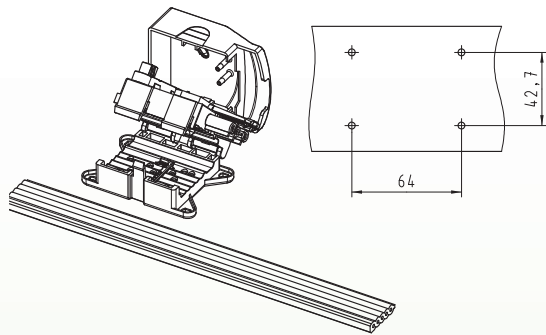


Installation instructions Flat cable system 5/5+2-pole


Installing outputs

using the example of the GST18i3 tap


1. Install the flat cable in a suitable cable-routing system. Note the laying direction for the output direction of the connectors. Insert the flat cable into the coded baseplate (92.051.5453.1 for green/black cable, 92.051.5553.0 for blue cable, 93.421.5453.0 for green cable, 91.021.5453.0 for black cable) so that it lies flush.

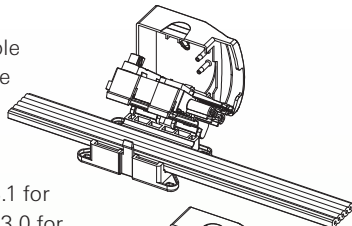


2. If necessary, fasten the baseplate to the desired subsurface using the mounting holes.

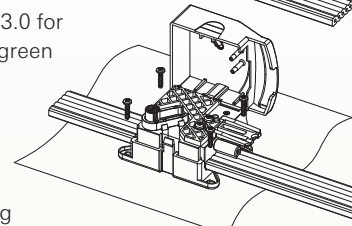

3. Close the connection module and engage it with a clearly audible click.




4. GST18i3 only: bring phase selection slider to the desired position until it engages with a clearly audible click.




5. Tighten contact screws (0.5 Nm).

6. **Phase change:** (GST18i3 only) Loosen the screw on the phase selection slider until the red ring is flush with the white contact slider. Select the phase again and tighten the screw (0.5 Nm).



7. Close the cover and engage it with a clearly audible click.

Caution: The screws are not all correctly tightened if the cover does not completely close!




8. Attach GST18i3, GST18i5, GST15i2, BST14 plug connector depending on the adapter and engage it with a clearly audible click.

Installing feed


using the example of a 5-pole feed

1. Insert the sheath stripped (PE: 100 mm, L1/D1: 82 mm, N: 72 mm, L2/D2: 62 mm, L3: 56 mm, stripping tool in the lid) and insulation stripped (8 mm) conductors into the marked termination points one after the other and fasten the contact screw (0.5 Nm).



2. Insert the feed cable into the strain relief and use both screws to tighten the strain relief bracket (0.6 Nm).

3. Insert the flat cable into the coded baseplate (92.050.1553.1 for green/black cable, 92.050.1653.0 for blue cable, 93.420.5453.0 for green cable, 91.020.5453.0 for black cable) so that it lies flush. Note the laying direction for the output direction of the connectors.


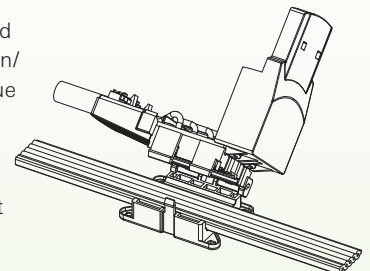


4. If necessary, fasten the baseplate to the desired subsurface using the mounting holes.

5. Tighten contact screws (0.5 Nm).

6. Close the cover and engage it with a clearly audible click.


Caution: The screws are not all correctly tightened if the cover does not completely close!

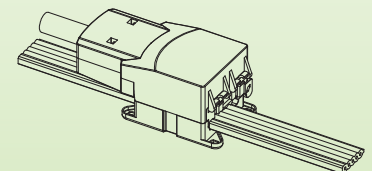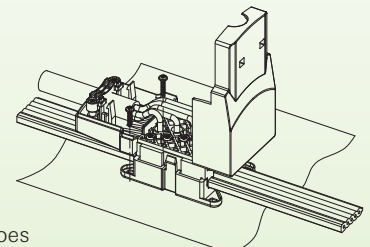

Sheath strip length 2-pole feed: 25 mm
Insulation strip length 2-pole feed: 8 mm
For fine-stranded conductors use ferrules

Removing outputs


1. Use a tool (screwdriver) to release the connector interlock and remove the connector. No tools are required to release the BST14 connector.

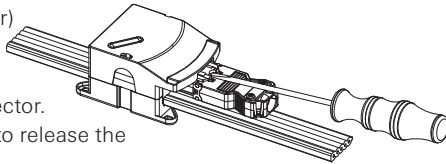


2. Push interlock in the direction of the arrow and open the cover.



3. Loosen the contact screws.

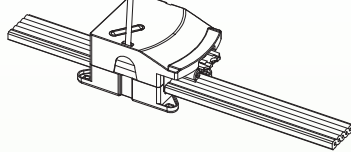


4. Unlock the baseplate interlock with a tool (screwdriver) and remove the module from the flat cable.




5. Close the contact openings in the cable with a cable repair patch.

Removing feed


1. Use a tool (screwdriver) to open the cover interlock. Press the interlock lugs in the direction of the arrow.

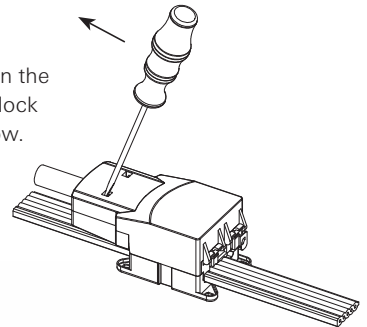

2. Loosen the contact screws and connection screws.

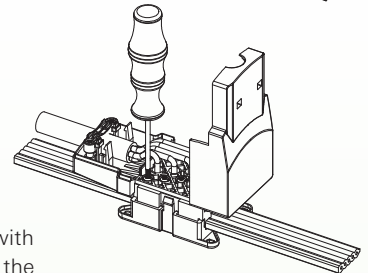


3. Unlock the baseplate interlock with a tool (screwdriver) and remove the module from the flat cable.

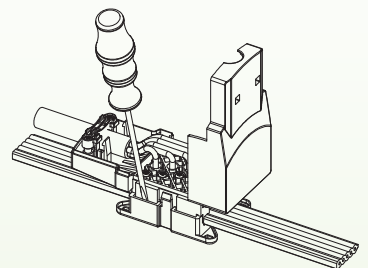

4. Close the contact openings in the cable with a cable repair patch.

Additional information:

- To remove the cover, insert a screwdriver into the slot provided and raise gently.
- **The ends of the flat cable must be cut off with the special cable scissors and terminated with the cable end cap.** This guarantees the necessary insulation between the conductors.
- After removing the adapters, the sections of cable that have been terminated with the piercing screws must be sealed with insulating tape.
- Functional capability can only be guaranteed if the original flat cable is used.

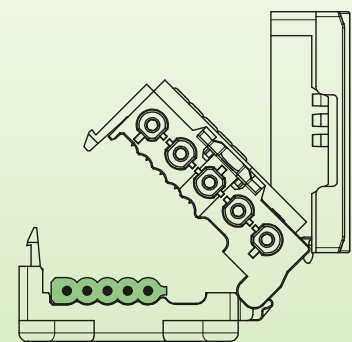

Flat cable system, 5-pole, open-ended











Installation instructions









Flat cable system 5-pole, 5G10mm²

Connection cross section: 2.5 – 6 mm², fine-stranded with ferrule, ferrule length 12 mm.
6 mm² with ferrule without insulating collar.










Installation



Removal



Installation instructions Flat cable system 5-pole, 5G16 mm²

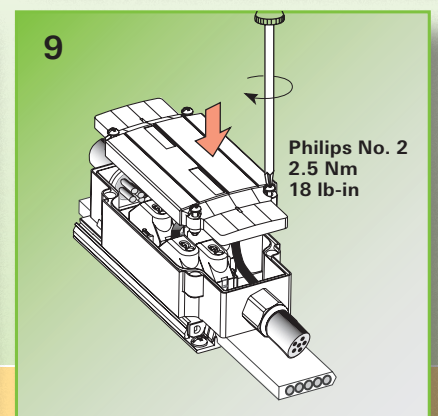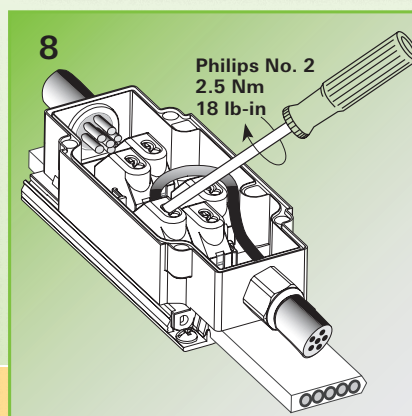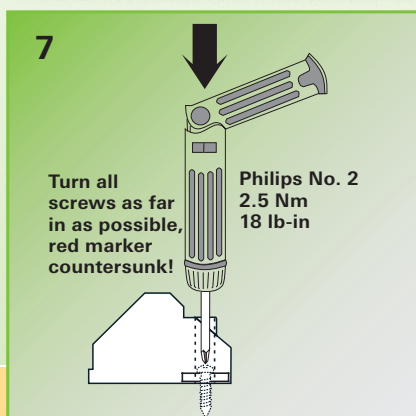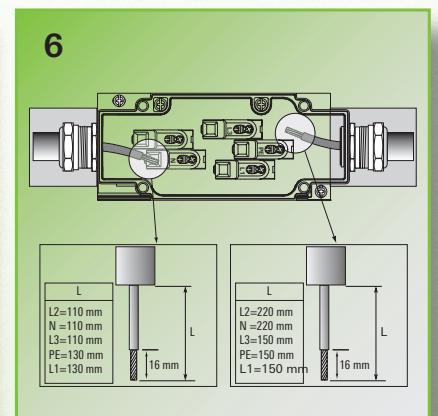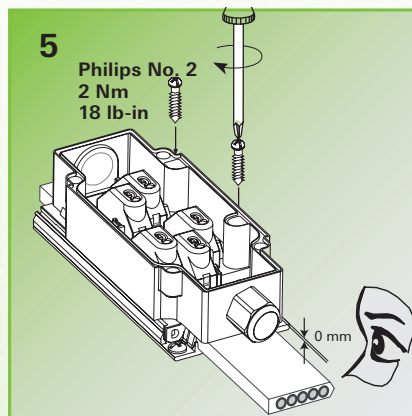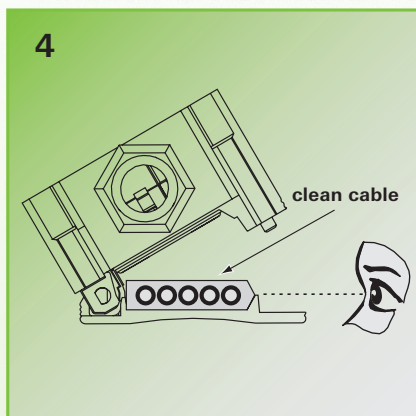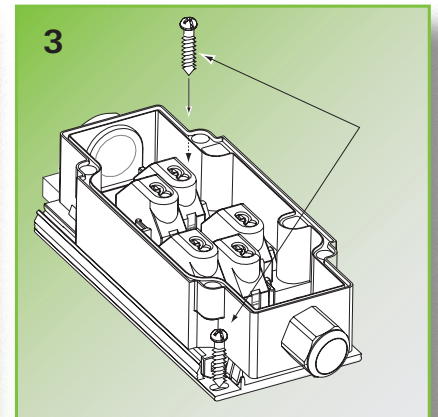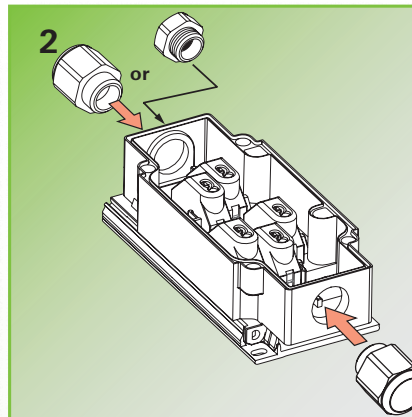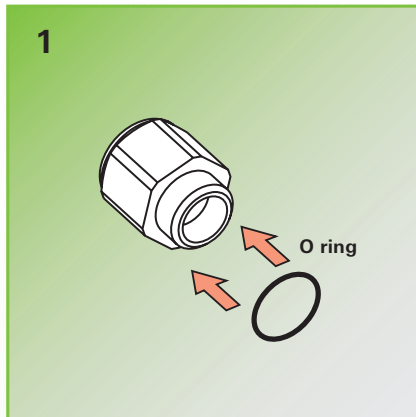

Technical data for GST18i3 ... i6

General:

Number of poles:	3, 4, 5 and 6-pole
Rated current:	20 A
Rated voltage:	250 V (2 and 3-pole; 6-pole) 250 V / 400 V (4 and 5-pole)
Rated impulse voltage:	4 kV (overvoltage category III)
Interlock:	Required according to IEC 61535: – already integrated in distributors and device connectors – available separately for “flying leads”, IDC adapters, flat cable adapters, and soldered parts
Product standards:	IEC 61535 (3 ... 5-pole), UL 1977, CSA Std. C 22.2 No. 182.3
Approvals:	VDE UL*, CSA under certain conditions (please consult us)
Degree of protection (IP):	IP 20 as per IEC 60529 unplugged IP 40 as per IEC 60529 when plugged or covered with caps that can be ordered separately
Ambient temperature:	–5 ... 40 °C
Operating temperature:	Max. 60 °C with pre-assembled H05VV and H05Z1Z1 cables
Ambient conditions:	Pollution degree 2 as per IEC 60664: “Only non-conductive pollution occurs. Occasional transient conductivity due to moisture condensation must be taken into account.”
Materials:	Insulation: PA, halogen-free, UL 94 V-0 Machined contacts: CuZn Screws: Steel, galvanized
Codings:	Different mechanical codings, identified by color Black and white and gray/tomato red have the same mechanical coding Note the differing rated voltages!
In general, the following applies:	– Contact protection of female connectors also when unplugged – Ground conductor leading, if available; in addition, the neutral line in 5-pole male connectors is leading the phases – No hazardous interchangeability with systems based on IEC 60309, IEC 60320, or IEC 60906 or with national connector and socket systems for home use.

Observe the following notes for your safety:

According to IEC 61535, installation connector systems must only be connected and disconnected without load.

When using GST18 plug connectors in easily accessible areas, caps or covers that can only be removed with a tool must be used (see Accessories).

Compliance with EN 61535 will not automatically prevent dangerous interchangeability between the installation connector systems of different manufacturers. Compatibility with third-party products cannot be guaranteed. Installation connector systems are not a replacement for domestic connector and socket systems for home use. According to VDE 0100, only qualified electricians or electrotechnically instructed persons are permitted to use installation connector systems. Never tamper with the cables and components! Observe applicable accident prevention and safety regulations.

The Wieland coding concept provides for the allocation of codings and colors to each application.

The applications are described in this catalogue.

When using codings for other applications, the user must ensure that dangerous mix-ups are prevented. Check for differing technical data, if applicable.

Do not use third-party components. Damages resulting from combination with third-party components are not covered by the warranty.

*) Category ECBT2 component, observe installation conditions!

Connectors:

Variations:	Female and male connectors, each with integrated strain relief, device connectors without strain relief		
Connection type:	Screw connection Tension spring connection		
Connection cross sections of contacts:	Screw:	0.5 ... 2.5 mm ² (solid and fine-stranded without ferrule)	
	Tension spring:	0.5 ... 2.5 mm ² (solid)	
		0.5 ... 1.5 mm ² (with ferrule)	
		1.5 and 2.5 mm ² ultrasonically welded	
		Unprepared fine-stranded cables are not permissible	
Torque	For screw contacts:	0.5 Nm	
	For strain relief:	0.5 – 0.7 Nm	
Fire load:	3-pole:	0.13 kWh	
	4-pole:	0.17 kWh	
	5-pole:	0.19 kWh	
	6-pole:	0.26 kWh	

Device connectors, snap-in:

Variations:	Female and male connectors with frames for snap-in in housing cut-outs with 0.5 ... 1.5 mm or 1.5 ... 2.5 mm thick walls		
Connection type:	Screw connection (3-pole) Tension spring connection (3 to 5-pole)		
Connection cross sections of contacts:	Screw:	0.5 ... 2.5 mm ² (solid and fine-stranded without ferrule)	
	Tension spring:	0.5 ... 2.5 mm ² (solid)	
		0.5 ... 1.5 mm ² (with ferrule)	
		1.5 and 2.5 mm ² ultrasonically welded	
	Unprepared fine-stranded cables are not permissible		
Torque	For screw contacts:	0.5 Nm	
Fire load:	3-pole:	0.07 kWh	
	4-pole:	0.10 kWh	
	5-pole:	0.11 kWh	

PC board connectors (soldered parts):

Variations:	Female and male connectors for soldering onto PC boards – Each with horizontal or vertical pins – Without fastening flange, models with fastening flange on request		
Spacing:	9.75 mm		
Pin length:	3.2 mm		
Fire load:	3-pole:	0.03 kWh	
	4-pole:	0.05 kWh	
	5-pole:	0.06 kWh	
	6-pole:	0.07 kWh	

Distributors:

Fire load:	3-pole	T:	0.09 kWh
	3-pole	h:	0.14 kWh
	3-pole	H:	0.15 kWh
	3-pole	HH:	0.23 kWh
	4-pole	T:	0.14 kWh
	5-pole	T:	0.14 kWh
	5-pole	H:	0.22 kWh
	5-pole	5/3:	0.34 kWh



Cable assemblies:

Variations:	Extension cables female – male Connection cables female – free end Connection cables male – free end Adapter cables female GST15 – male GST18 Adapter cables to international household connector systems		
Rated current:	16 A with cable cross sections of 1.5 mm ² 20 A with cable cross sections of 2.5 mm ²		
Free ends:	Sheath and insulation stripped and ultrasonically welded / with ferrules		
Fire load of PVC cables:	3 x 1.5 mm ² : 4 x 1.5 mm ² : 5 x 1.5 mm ² : 3 x 2.5 mm ² : 4 x 2.5 mm ² : 5 x 2.5 mm ² :	0.38 kWh/m + 0.13 kWh 0.50 kWh/m + 0.17 kWh 0.56 kWh/m + 0.19 kWh 0.58 kWh/m + 0.13 kWh 0.60 kWh/m + 0.13 kWh 1.15 kWh/m + 0.17 kWh	per connector per connector per connector per connector per connector per connector
Cables used:	H05VV-F (PVC) H05V2V2-F (PVC up to 90 °C continuous temperature) H05Z1Z1-F (halogen-free) S05Z1Z1-F (halogen-free) S05HH-F (halogen-free) Routing and handling > 5°C Other types on request		

Note:


Our GST18i3 PVC cable assemblies with diameter 1.5 mm² are also approved according to DIN EN 60320.

Multiple sockets – currently applicable standards:
Information:

According to VDE 0620-1, connecting **mobile** outlets in series is not permissible, as safe circuit breaker function cannot be ensured.

This is also valid for the multiple outlets with GST 18 input and output shown here.

When using our multiple outlets in a **fixed installation**, e.g. in desks, cable ducts, shelves, etc., they may be connected in series subject to observance of the overall connected load, maximum power of 16 A, and the maximum admissible cable length for the respective installation.

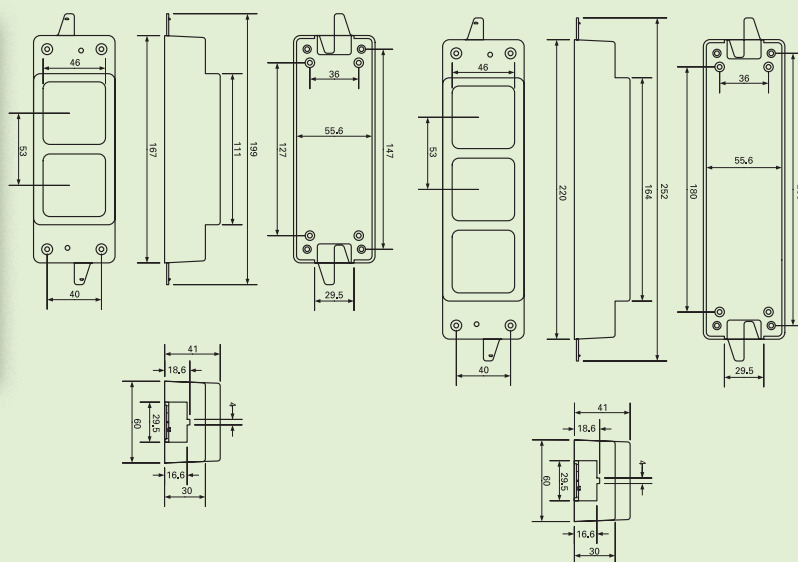

Technical data for GST18i3 ... i6 “No Flame” material

For general technical data see previous page


Materials:	Insulation:	PA, halogen-free and flame-protected, UL 94 V-0
	Contacts:	CuZn
	Screws:	Steel, galvanized

Technical data for **gesis® TOP 3-pole**

Technical data for **gesis® TOP**:

- Rated voltage max. 250 V
- Rated current max. 20 A
- Rated current max. 2.5 A, in lamp outlet
- Temperature range of -35 °C to +50 °C
- Degree of protection IP40, plugged
- Approval for feed-through IEC 61535, output IEC 61984
- Color white
- Dimensions (L x W x H) 59.0 x 30.4 x 18.3 mm

Dimensions

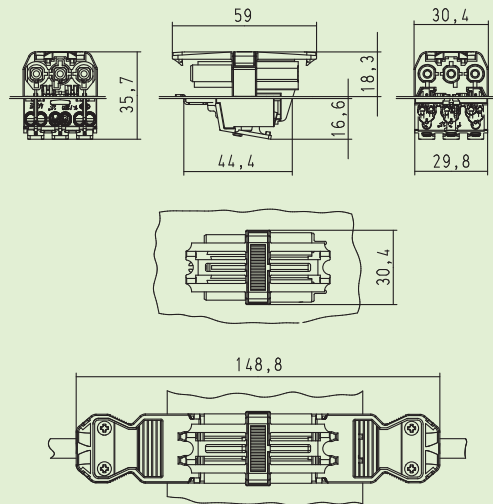


Technical data for lamp terminal:

As specified by the manufacturer BJB

Ref. No. BJB 46.413.1302

Required metal sheet cut-out

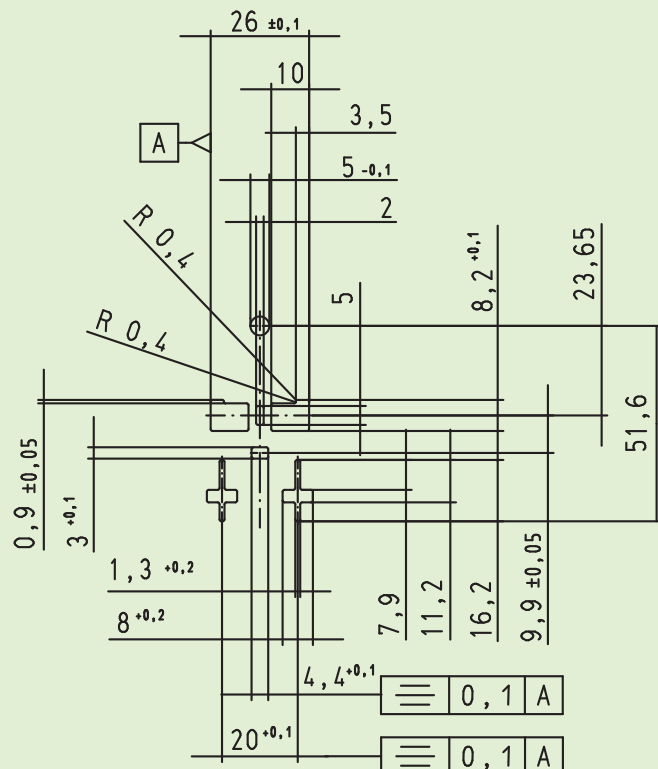

Technical data for GST15i 2...5-pole

General:

Number of poles:	2, 3, 4 and 5-pole
Rated current:	16 A (GST15i2 pastel blue 6 A, GST15i5 turquoise blue, may green, light blue 13A)
Rated voltage:	50V light blue 250V (2 and 3-pole) 250V / 400V (4 and 5-pole)
Rated impulse voltage:	4 kV (overvoltage category III)
Interlock:	fully integrated
Product standards:	IEC 61535
Approvals:	VDE (CB) UL, CSA under certain conditions (please consult us)
Degree of protection (IP):	IP 20 as per IEC 60529 unplugged IP 40 as per IEC 60529 when plugged
Ambient temperature:	–5 ... 40 °C
Operating temperature:	max. 60 °C with pre-assembled PVC cables
Ambient conditions:	Pollution degree 2 as per IEC 60664: "Only non-conductive pollution occurs. Occasional transient conductivity due to moisture condensation must be taken into account."
Materials:	Insulation: PA, halogen-free Machined contacts: CuZn, copper pre-coated and silver-coated Screws: Steel, galvanized
Codings:	Different mechanical codings, identified by color Black and white have the same mechanical coding Note the differing rated voltages!
In general, the following applies:	– Contact protection of female connectors also when unplugged – Ground conductor leading; in addition, the neutral conductor in 5-pole male connectors is leading the phases – Protection against mismatching as per IEC 61535 – against connecting single poles – against connecting different numbers of poles – against pole displacement – against inverted connections – No hazardous interchangeability with systems based on IEC 60309, IEC 60320, or IEC 60906 or with national connector and socket systems for home use.

Observe the following notes for your safety:


According to IEC 61535, installation connector systems must only be connected and disconnected without load. GST15 plug connectors are not suitable for use in easily accessible areas. Compliance with EN 61535 will not automatically prevent dangerous interchangeability between the installation connector systems of different manufacturers. Installation connector systems are not a replacement for domestic connector and socket systems for home use. According to VDE 0100, only qualified electricians or electrotechnically instructed persons are permitted to use installation connector systems.

Connectors:

Variations:	Female and male connectors, each with integrated strain relief	
Connection type:	Screw connection	
Connection cross sections of contacts:	0.5 ... 2.5 mm ²	
Torque for contacts:	0.5 Nm	
Torque for strain relief:	0.5 – 0.7 Nm	
Fire load:	2-pole:	0.06 kWh
	3-pole:	0.06 kWh
	4-pole:	0.12 kWh
	5-pole:	0.12 kWh

Device connectors, snap-in:

Variations:	Female and male connectors with snap-in frames for housing cut-outs with 0.5 ... 1.5 mm thick walls	
Connection type:	Screw connection	
Connection cross sections of contacts:	0.5 ... 2.5 mm ²	
Torque for contacts:	0.5 – 0.7 Nm	
Fire load:	2-pole:	0.04 kWh
	3-pole:	0.04 kWh
	4-pole:	0.06 kWh
	5-pole:	0.06 kWh

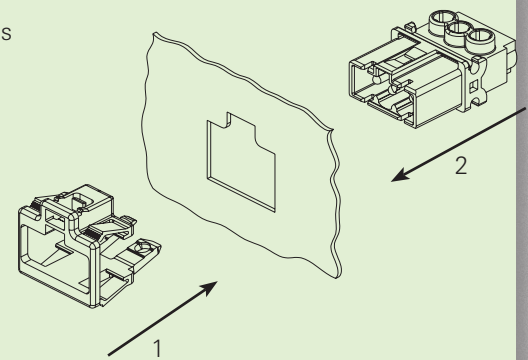

PC board connectors (soldered parts):

Variations:	Female and male connectors for soldering onto PC boards	
	– Each with horizontal or vertical pins	
	– Each with or without fastening flange	
Spacing:	5.3 mm	
Pin length:	3.2 mm	
Fire load:	2-pole:	0.03 kWh
	3-pole:	0.03 kWh
	4-pole:	0.04 kWh
	5-pole:	0.04 kWh

Distributors:

Fire load:	2-pole	T:	0.03 kWh	2-pole	h:	0.04 kWh
	2-pole	H:	0.04 kWh			
	3-pole	T:	0.04 kWh	3-pole	h:	0.06 kWh
	3-pole	H:	0.07 kWh	3-pole	HH:	0.11 kWh
	4-pole	T:	0.06 kWh	4-pole	h:	0.08 kWh
	4-pole	H:	0.09 kWh			

Cable assemblies:

Variations:	Extension cables female – male	
	Connection cables female – free end	
	Connection cables male – free end	
	Adapter cables female GST15i3 – male GST18i3	
	Adapter cables male GST15i2 – female GST08i2	
	Adapter cables female – male CEE 7/4 connector, angled	
Free ends:	Sheath and insulation stripped and ultrasonically welded / with ferrules	
Fire load:		
PVC cables:	2 x 1.5 mm ² :	0.28 kWh/m + 0.06 kWh per connector
	3 x 1.5 mm ² :	0.38 kWh/m + 0.06 kWh per connector
	4 x 1.5 mm ² :	0.50 kWh/m + 0.12 kWh per connector
	5 x 1.5 mm ² :	0.56 kWh/m + 0.12 kWh per connector
Cable:	H05VV-F (PVC)	
	H05Z1Z1-F (halogen-free)	
	Other types on request	
Routing and handling	> 5 °C	



Technical data for GST 08i2

General:

Number of poles:	2		
Rated values:	White coding:	250 V~, 2.5 A	
	Blue coding:	12 V, 6 A	
	Green coding:	24 V, 6 A	
	Red coding:	250 V~, 2.5 A	
	Yellow coding:	50 V, 6 A	
Approvals:	EN 60320 (white coding) and EN 61984 (blue, red, yellow, and green coding)		
Ambient temperature:	–5...+40 °C		
Operating temperature:	Max. 60 °C		
Materials:	Insulating housing:	PA6	
	Housing:	PVC	
Codings:	Different mechanical codings, identified by color. Note the differing rated voltages.		
Please note:	When using adapter cables for connection to GST 15 or GST 18, the circuit must be fused for the rated current of the GST08 components!		
	GST08 plug connectors are not a replacement for domestic connector and socket systems for home use.		
	According to VDE0100, only qualified electricians or electrotechnically instructed persons are permitted to use installation connector systems.		
	gesis ^{MICRO} (GST08) is not intended for use in fixed installations as per IEC 61535.		
	Never tamper with the cables and components! Observe applicable accident prevention and safety regulations. Do not use third-party components.		
Cable assemblies:	Variations:	Extension cables	Female – male
		Connection cable	Female – free end
		Connection cable	Male – free end
		Adapter cables	Female GST 15 to male GST08
		Distribution cables	Male connector to 6-fold distributor
Open line ends:	Sheath and insulation stripped and crimped with ferrules		
Cables used:	H03V2V2H2F	PVC (up to 90° C continuous temperature) on the conductor, 50 °C on the sheath	
	LIYZ	PVC	

Technical data for GST08i3

General:

Number of poles: 3
 Rated values: White coding: 250 V~, 6 A

Approvals: EN 60320

Ambient temperature: -5...+40 °C
 Operating temperature: Max. 60 °C

Materials: Insulating housing: PA6
 Housing: PVC

Codings: A mechanical coding

Please note: When using adapter cables for connection to GST 15 or GST 18, the circuit must be fused for the rated current of the GST08 components!

GST08 plug connectors are not a replacement for domestic connector and socket systems for home use.

According to VDE0100, only qualified electricians or electrotechnically instructed persons are permitted to use installation connector systems.

gesis[®] MICRO (GST08) is not intended for use in fixed installations.

Never tamper with the cables and components!
 Observe applicable accident prevention and safety regulations.
 Do not use third-party components.

Cable assemblies:	Variations:	Extension cables	Female – male
		Connection cable	Female – free end
		Connection cable	Male – free end
		Adapter cables	Female GST 15 to male GST08
		Distribution cables	Male connector to 6-fold distributor
Open line ends:	Sheath and insulation stripped and crimped with ferrules		
Cables used:	H03VV-F PVC (up to 60 °C continuous temperature)		



Technical data for BST 14i2

General:

Poles:	2
Rated voltage:	50 V
Rated current:	3 A
Wire colors:	1 (+) red, 2 (-) black
Rated cross sections:	0.25 – 0.75 mm ²
Connection type:	Spring-loaded
Coding:	Mechanical codings, identified by color
Interlock:	Integrated, without tools
Strain relief	Integrated in connector housing
Degree of protection (IP):	IP 20
Insulation strip length:	8 mm
Feed-through resistance:	Approx. 5 mΩ per female-male connection
Materials:	Thermoplastic, halogen-free Contacts: plated brass
Continuous temperature:	70 °C

Voltage types: Use BST 14i2 connectors only in connection with a SELV or PELV power supply!

Green coding (KNX):

Coding:	As per KNX standard
Approvals:	Connectors as per KNX manual
Cables:	As per KNX guidelines

Blue coding:


Coding:	Individual coding
---------	-------------------

Technical data for BST 14i3

General:

Poles:	3 (+, -, shield)
Rated voltage:	50 V
Rated current:	3 A
Wire colors:	1 (+) red, 2 (-) black
Rated cross sections:	0.25 – 0.75 mm ²
Connection type:	Spring-loaded
Coding:	Mechanical codings, identified by color
Interlock:	Integrated
Strain relief	Integrated in connector housing
Degree of protection (IP):	IP 20
Insulation strip length:	8 mm
Feed-through resistance:	Approx. 5 mΩ per female-male connection
Materials:	Thermoplastic, halogen-free Contacts: plated brass
Continuous temperature:	70 °C
Approval:	EN 61984 (VDE 0627)

Bore hole pattern for BST solder connectors Female/
Male

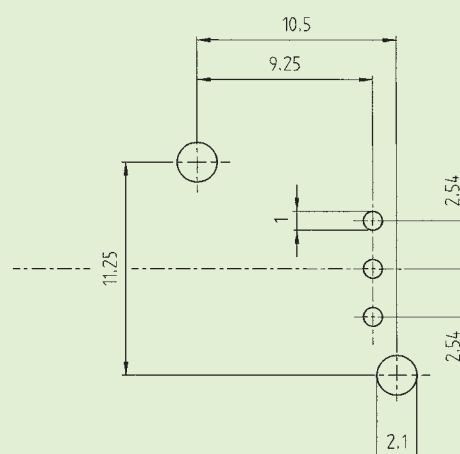

Voltage types: Use BST 14i3 connectors only in connection with a SELV or PELV voltage supply!

General note:

According to VDE0100, only qualified electricians or electrotechnically instructed persons are permitted to use installation connector systems.

Never tamper with the cables and components!

Observe applicable accident prevention and safety regulations as well as local installation instructions.

According to the installation instructions, the live component **MUST** be a female connector.

It is not possible to install cables in a ring circuit!

Connectors must only be connected and disconnected without load.

The WIELAND concept provides for the allocation of codings and colors to each application.

When using codings differently, the user must ensure that dangerous mix-ups are prevented.

The user must check for differing technical data, if applicable.

Technical data for LST03i2 ...i4

General:

Number of poles:	2 and 4-pole
Rated values:	Max. voltage 32 V
	Max. current 3.0 A
Spacing:	2.5 mm
Approvals:	VDE, UL
Degree of protection (IP):	IP 20
Ambient temperature:	-40 ... +120 °C
Operating temperature:	
Dimensions:	11.0 x 7.5/12.5 x 7.3 mm
	Board thickness 1.55 mm ± 0.19 mm
Cable:	0.22 – 0.35 mm ² (AWG 32– 34)
Codings:	With/without center bridge
Please note:	Never tamper with the cables and components!
	Observe applicable accident prevention and safety regulations.
	Do not use third-party components.
Cable assemblies:	2 or 4-pole versions, female – male are identical



Technical data

Flat cable system 5-pole, 2.5 / 4 mm²

Components:	Feed adapter for round cable Flat cable adapter GST 18i3 with phase selection Flat cable adapter GST 18i5
Connection technology:	Insulation piercing clamping with pluggable output as per Wieland coding GST 18 [®]
Contact screws:	Tightening torque: 0.5 Nm
Strain relief screw:	Tightening torque: 0.6 Nm
Rated voltage:	250 V/400 V (blue cables and components are designed for combination of mains voltage with signals up to AC 250V (Touch DIM / SMI))
Rated current:	20 A
Number of poles:	3/5-pole
Regulations:	EN61535 / EN60998-1 / EN60998-2-3
Approval:	VDE requested
Degree of protection (IP):	IP 20
Connection cable for feed:	Ø 12 – 16 mm
Materials:	Housing: thermoplastic, halogen-free Contact parts: brass, surface-plated tin bronze, surface-plated
Operating temperature of the system:	-5 up to +40 °C
Installation temperature:	+5 up to +40 °C
Coding:	Mechanical coding GST 18i, Code 1, black Code 2, pastel blue
General:	The voltage (feed) is supplied to the flat cable with a screwable flat cable adapter. The output boxes can be adapted using insulation piercing screw technology. The outputs themselves are pluggable using gesis[®] connector systems. The connectors must be locked together with the adapter.
Note:	According to VDE 0100, only qualified electricians or electrotechnically instructed persons are permitted to use installation connector systems. Never tamper with the cables and components! Observe applicable accident prevention and safety regulations. Only open the covers of gesis[®] NRG components when they are not energized. Never connect or disconnect GST 18[®] connectors under load. Do not use third-party components. Only combinations of Wieland products are covered by the warranty. Connection and termination points, as well as plug-in connections of cables/conductors, must be provided with mechanical strain relief as per VDE 0100-520. Never use force to unplug gesis[®] connectors.

PVC flat cable

Number x cross section:	5 x 2.5 mm ²
Outer sheath:	PVC
Sheath color:	black / green / blue
Dimensions (W x H):	27.5 x 6.3 mm
Fire behavior:	Self-extinguishing and flame-retardant as per IEC 60332-1
Bending radius:	Min. 60 mm (with fixed installation as per DIN VDE 0298-3)

Structure:

Copper wire:	Uncoated, fine-stranded, Class 6
Insulation:	PVC
Wire colors:	



Technical data:

Cable cross section:	2.5 mm ²
Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Stationary:	-15 to +70 °C
Moving:	-5 to +70 °C

black/green Mains 250V/400V ⊕ = GN/YE N = BU 1 = BN 2 = BK 3 = GY	blue Mains 250V+ AC 250V signal ⊕ = GN/YE N = BU 1 = BN D2 = BK D1 = GY
---	---

Halogen-free flat cable

Number x cross section:	5 x 2.5 mm ² / 5 x 4 mm ²
Outer sheath:	Thermoplastic PE compound, halogen-free and no corrosive gases as per DIN VDE 0472 Part 813
Sheath color:	Black / green / blue
Dimensions (W x H):	27.5 x 6.3 mm
Fire behavior:	Self-extinguishing and flame-retardant as per IEC 60332-1. Low smoke development as per IEC 61034-1/2
Bending radius:	Min. 60 mm (with fixed installation as per DIN VDE 0298-3)

Structure:

Copper wire:	Uncoated, fine-stranded, Class 6
Insulation:	Cross-linked, halogen-free, and flame-retardant PE
Wire colors:	



Technical data:

Cable cross section:	2.5 mm ² / 4 mm ²
Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Stationary:	-15 to +70 °C
Moving:	-5 to +70 °C

black/green Mains 250V/400V ⊕ = GN/YE N = BU 1 = BN 2 = BK 3 = GY	blue Mains 250V+ AC 250V Signal ⊕ = GN/YE N = BU 1 = BN D2 = BK D1 = GY
---	---



Technical data

Flat cable system 5+2-pole

Components:

Mains

Feed adapter for round cables 5 x 2.5/4 mm²
Flat cable adapter GST 18i5
Flat cable adapter GST 18i3

Bus

Feed adapter for round cables 2 x 1.5 mm²
Flat cable adapter BST 14i2
Flat cable adapter GST 15i2

Connection technology:	Insulation piercing clamping with pluggable output as per Wieland coding GST, BST	
Clamping screws:	Tightening torque: 0.5 Nm	Tightening torque: 0.5 Nm
Voltage category:	5 x 2.5/4 mm ² Mains 250 / 400 V	2x1.5 mm ² green: SELV 2x1.5 mm ² black: not SELV, 50 V
Rated current:	20 A	2x1.5 mm ² green: 3 A 2x1.5 mm ² black: 6 A
Number of poles:	3/5-pole	2-pole (1+, 2– and D1, D2)
Regulations:	IEC 61535 IEC 998-2-3 (insulation piercing clamp)	BASIC + SELV as per KNX manual
Approval:	VDE requested	BASIC + SELV requested as per KNX manual
Degree of protection (IP):	IP 20	IP 20
Connection cable for feed:	Ø 12 – 16 mm	Ø 5.9 – 7.5 mm
Materials:	Housing: thermoplastic, halogen-free Contact parts: brass, surface-plated tin bronze, surface-plated	
Operating temperature of the system:	-5 to +40 °C	
Installation temperature:	+5 to +40 °C	
Coding:	Mechanical coding GST 18i3, code 1, black Mechanical coding GST 18i5, code 1, black; code 2, pastel blue Mechanical coding GST 15i2, code 2, pastel blue Mechanical coding BST 14i2, code 1, black/green	
General information on BASIC+SELV:	Bus system components must be chosen in compliance with SELV	
Info:	The voltage (feed) is supplied to the flat cable with a screwable flat cable adapter. The output boxes can be adapted using insulation piercing screw technology. The outputs themselves are pluggable using gesis[®] connector systems. The connectors must be locked together with the adapter. Functional safety can only be guaranteed if the original cable is used. The bus cable with screen is only suitable for use in SELV applications. The wire colors have been designed to the European standard. The assignment corresponds to international recommendations. Never tamper with the cables and components! Observe applicable accident prevention and safety regulations. Only open the covers of gesis[®] NRG components when they are not energized. Never connect or disconnect GST/BST connectors under load. Do not use third-party components. Only combinations of Wieland products are covered by the warranty. Connection and termination points, as well as plug-in connections of cables/conductors, must be provided with mechanical strain relief as per VDE 0100-520. Never use force to unplug gesis[®] connectors. According to VDE 0100, only qualified electricians or electrotechnically instructed persons are permitted to use installation connector systems.	

PVC flat cable

Number x cross section:	Mains 5 x 2.5 mm ²	Bus 2 x 1.5 mm ²
Outer sheath:	PVC	
Sheath color:	Black/green	Capacity: 70 pF/m
Dimensions (W x H):	36.9 x 6.3 mm	Attenuation at 1 MHz: nom. 1.2 dB/100 m
Fire behavior:	Self-extinguishing as per IEC 60332-1	Wave resistance at 1 MHz: nom. 75 Ω
Bending radius:	Min. 60 mm (with fixed installation as per DIN VDE 0298-3)	

Structure:

Copper wire:	Uncoated, fine-stranded	
Insulation:	PVC	PE
Wire colors:	 Gray, black, blue, brown, green/yellow	White
BASIC + SELV:	Double aluminum strip screening, galvanically insulated	

black Mains+ SIGNAL 250V/400V	green Mains+SELV 250V/400V
⊕ = GN/YE	⊕ = GN/YE
N = BU	N = BU
1 = BN	1 = BN
2 = BK	2 = BK
3 = GY	3 = GY
WS = D1, D2	WS = 1+, 2-

Technical data:

Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Rated current:	20 A
Testing current:	As per IEC 60364-5-523
Stationary:	-15 to +70 °C
Moving:	-5 to +70 °C

Halogen-free flat cable

Number x cross section:	Mains 5 x 2.5 / 5 x 4 mm ²	Bus 2 x 1.5 mm ²
Outer sheath:	Halogen-free copolymer	
Sheath color:	Black/green	Capacity: 70 pF/m
Dimensions (W x H):	36.9 x 6.3 mm	Attenuation at 1 MHz: nom. 1.2 dB/100 m
Fire behavior:	Self-extinguishing as per IEC 60332-1	Wave resistance at 1 MHz: nom. 75 Ω
Bending radius:	Min. 60 mm (with fixed installation as per DIN VDE 0298-3)	

Structure:

Copper wire:	Uncoated, fine-stranded	
Insulation:	Cross-linked, halogen-free, and flame-retardant PE	PE
Wire colors:	 Gray, black, blue, brown, green/yellow	White
BASIC + SELV:	Double aluminum strip screening, galvanically insulated	

black Mains+ SIGNAL 250V/400V	green Mains+SELV 250V/400V
⊕ = GN/YE	⊕ = GN/YE
N = BU	N = BU
1 = BN	1 = BN
2 = BK	2 = BK
3 = GY	3 = GY
WS = D1, D2	WS = 1+, 2-

Technical data:

Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Rated current:	20 A
Testing current:	As per IEC 60364-5-523
Stationary:	-15 to +70 °C
Moving:	-5 to +70 °C



Technical data

Flat cable system 5 pole, 10 mm²

Components:	Feed adapter for round cables 10 mm² Output adapter for round cables 2.5 – 6 mm²	
Connection technology:	Insulation piercing clamp	
Contact screws:	Tightening torque: 1.5 Nm	
Rated voltage:	250 V/400 V	
Rated current of flat cable:	50 A	
Rated current of adapter:	25 A	
Number of poles:	5-pole	
Conductor structure:	77 x 0.40 (n x mm)	
Sheath color:	Light green RAL 6027	
Regulations:	IEC 998-2-3, DIN EN 60998-2-3/VDE 0613-2-3	
Degree of protection (IP):	IP 20, DIN VDE 0470 Part 1/11.92	
Connection cable for feed:	Ø 18 – 25 mm	
Connection cable for output adapter:	Ø 9.7 – 18 mm	
Connection cross section of output adapter:	2.5 - 6.0 mm ² (6 mm ² with ferrule without collar)	
Temperature range:	Stationary PVC:	+5 °C to +45 °C
	Stationary halogen-free:	+5 °C to +45 °C
Fire load:	Feed for mains	~ 0.45 kWh
	Output for mains	0.62 kWh
Properties halogen-free:	– Halogen-free as per DIN EN 50267-2-2 and DIN VDE 0482 Part 267-2-2 (formerly CENELEC HD 602 and DIN VDE 0472 Part 813), IEC 60754-2 – Low fire propagation as per IEC 60332-3 cat. C, CENELEC HD 405.3 – Minimal smoke development as per EN 50268, DIN VDE 0482 Part 268, IEC 61034 – Self-extinguishing as per DIN EN 50265-2-1, VDE 0482 Part 265-2-1 (formerly CENELEC HD 405.1 and DIN VDE 0472 Part 804 B), IEC 60332-1	
Note:	Functional safety can only be guaranteed if the original cable is used.	

PVC flat cable

Number x cross section:	5 x 10 mm ²	
Outer sheath:	Insulation:	PVC, as per CENELEC HD 21.1 S4, TI2
	Sheath:	PVC, as per CENELEC HD 21.1 S4, TM2
Weight:	837 kg/km	
Dimensions (W x H):	38.5 x 10.0 mm	
Fire load:	2.138 kWh/m	
Fire behavior:	Self-extinguishing as per IEC 60332-1, DIN EN 50265-2-1 (DIN VDE 0482 Part 265-2-1) (formerly CENELEC HD 405.1)	
Bending radius:	Min. 100 mm (with fixed installation as per DIN VDE 0298-3)	

Structure:

Copper wire:	Uncoated, fine-stranded, as per CENELEC HD 383 S2 Class 6
Insulation:	PVC as per CENELEC HD 21.1 S2, TI2
Wire colors*:	Brown, blue, green-yellow, black, gray



⊕	= GN/YE
N	= BU
1	= BN
2	= BK
3	= GY

Technical data:

Cable cross section:	10 mm ²
Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Printing:	5 G 10 MM2, 1KV, VDE REG NO. 9475

Halogen-free flat cable

Number x cross section:	5 x 10 mm ²	
Outer sheath:	Insulation:	Cross-linked, halogen-free, flame-retardant PE as per DIN VDE 0207 Part 22 "2XI1" and following IEC 60502-1 "XLPE"
	Sheath:	Thermoplastic and halogen-free compound as per DIN VDE 250 Part 214 "HM2"
Weight:	844 kg/km	
Dimensions (W x H):	38.5 x 10.0 mm	
Fire load:	1.835 kWh/m	
Fire behavior:	Self-extinguishing as per IEC 60332-1. Low smoke development as per IEC 61034-1/2	
Bending radius:	Min. 100 mm (with fixed installation as per DIN VDE 0298-3)	

Structure:

Copper wire:	Cu uncoated, fine-stranded as per DIN VDE 0295 Class 5 CENELEC HD 383 S2 Class 5 and IEC 60228 Class 5
Insulation:	Cross-linked, halogen-free, and flame-retardant PE
Wire colors*:	Brown, blue, green-yellow, black, gray



⊕	= GN/YE
N	= BU
1	= BN
2	= BK
3	= GY

Technical data:

Cable cross section:	10 mm ²
Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Printing:	5 G 10 MM2, FR/LSOH, 1KV, VDE REG NO. 9480

* The wire colors have been adjusted to the new European standard HD 208 S2.
The assignment corresponds to international recommendations.



Technical data

Flat cable system 5-pole, 16 mm²

Components:	Feed adapter for round cables 5 x 16 mm² Output adapter for round cables 5 x 6 mm² Flat cable adapter incl. circuit breaker with GST18 output	
Connection technology:	Insulation piercing clamping with pluggable output as per Wieland coding GST	
Contact screws:	Tightening torque: 2.5 Nm	
Rated voltage:	250 V/400 V	
Rated current:	63 A	
Number of poles:	3/5-pole	
Conductor structure:	126 x 0.40 (n x mm)	
Sheath color:	Light gray	
Regulations:	IEC 998-2-3, DIN EN 60998-2-3/VDE 0613-2-3	
Degree of protection (IP):	IP 65	
Connection cable for feed:	Ø 16 – 28 mm	
Materials:	Insulation: PVC or PE Contact parts: Cu uncoated, fine-stranded as per DIN VDE 0295 Class 5 CENELEC HD 383 S2 Class 5 and IEC 60228 Class 5	
Temperature range:	Stationary PVC:	+5 °C to +50 °C
	Stationary halogen-free:	+5 °C to +50 °C
Fire load:	Feed for mains	~ 3.30 kWh
	Output for mains	~ 3.30 kWh
Adapter incl. circuit breaker:	Adaptation using insulation piercing clamp technology. 4 fused outputs GST18, code 1, black	
General:	The feed and the output boxes can be adapted using insulation piercing screw technology. The outputs of the adapter with circuit breaker are pluggable using gesis [®] connector system GST18. The connectors must be locked together with the adapter. Use the corresponding GST accessories for this purpose.	
Properties PVC:	Special resistance to oils and acids – ASTM oil 2 "CAL-2" = good – Hydraulic oil "Aeroshell No. 41" = very good – Resistance to acids = good to very good	
Properties PE:	– Halogen-free as per DIN EN 50267-2-2 and DIN VDE 0482 Part 267-2-2 (formerly CENELEC HD 602 and DIN VDE 0472 Part 813), IEC 60754-2 – Low fire propagation as per IEC 60332-3 cat. C, CENELEC HD 405.3 – Minimal smoke development as per EN 50268, DIN VDE 0482 Part 268, IEC 61034 – Self-extinguishing as per DIN EN 50265-2-1, VDE 0482 Part 265-2-1 (formerly CENELEC HD 405.1 and DIN VDE 0472 Part 804 B), IEC 60332-1	
Note:	Functional safety can only be guaranteed if the original cable is used.	

PVC flat cable

Number x cross section:	5 x 16 mm ²
Outer sheath:	Insulation: PVC, "T13" as per CENELEC HD 21.1 S4 Sheath: PVC, "DMV6" as per DIN VDE 0276-603 (VDE 0276 Part 603): 2000-5 contains CENELEC HD 603 S1 + A1, oil resistance as "TM5" as per CENELEC HD 21.1 S4
Weight:	1255 kg/km
Dimensions (W x H):	48.6 x 11.3 mm
Fire load:	2.88 kWh/m
Fire behavior:	Self-extinguishing as per IEC 60332-1, DIN EN 50265-2-1 (DIN VDE 0482 Part 265-2-1) (formerly CENELEC HD 405.1)
Bending radius:	Min. 100 mm (with fixed installation as per DIN VDE 0298-3)
Structure:	
Copper wire:	Uncoated, fine-stranded, as per CENELEC HD 383 S2 Class 6
Insulation:	PVC as per CENELEC HD 21.1 S2, T12
Wire colors*:	Brown, blue, green-yellow, black, gray
Technical data:	
Cable cross section:	16 mm ²
Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Printing:	5 G 16 MM2, 1KV, VDE REG NO. 9475



⊕	= GN/YE
N	= BU
1	= BN
2	= BK
3	= GY

Halogen-free flat cable

Number x cross section:	5 x 16 mm ²
Outer sheath:	Insulation: Cross-linked, halogen-free, flame-retardant PE as per DIN VDE 0207 Part 22 "2Xl1" and following IEC 60502-1 "XLPE" Sheath: Thermoplastic and halogen-free compound as per DIN VDE 250 Part 214 "HM2"
Weight:	1266kg/km
Dimensions (W x H):	48.6 x 11.3 mm
Fire load:	2.48 kWh/m
Fire behavior:	Self-extinguishing as per IEC 60332-1. Low smoke development as per IEC 61034-1/2
Bending radius:	Min. 100 mm (with fixed installation as per DIN VDE 0298-3)
Structure:	
Copper wire:	Cu uncoated, fine-stranded as per DIN VDE 0295 Class 5 CENELEC HD 383 S2 Class 5 and IEC 60228 Class 5
Insulation:	Cross-linked, halogen-free, and flame-retardant PE
Wire colors*:	Brown, blue, green-yellow, black, gray



⊕	= GN/YE
N	= BU
1	= BN
2	= BK
3	= GY

Technical data:

Cable cross section:	16 mm ²
Testing voltage:	4 kV
Rated voltage:	0.6 / 1 kV
Printing:	5 G 16 MM2, FR/LSOH, 1KV, VDE REG NO. 9480

* The wire colors have been adjusted to the new European standard HD 208 S2.

The assignment corresponds to international recommendations.



Part number | page

00.702.0306.7	144	90.200.0524.2	115	91.021.0553.0	78	91.043.0153.0	93
00.702.0307.3	145	90.200.1020.2	114	91.021.1053.0	78	91.043.0153.1	93
00.709.0306.7	144	90.200.1024.2	115	91.021.1153.0	78	91.044.0053.0	93
00.709.0307.3	145	90.200.3020.2	114	91.021.5453.0	141	91.044.0053.1	93
00.710.0303.1	140	90.200.3023.2	114	91.022.0053.0	78	91.044.0153.0	93
00.710.0303.6	140	90.210.0523.2	114	91.022.0053.1	78	91.044.0153.1	93
00.710.0303.7	140	90.210.0524.2	115	91.022.0153.0	78	91.050.3151.0	101
00.710.0304.1	140	90.210.0543.2	114	91.022.0153.1	78	91.050.3251.0	101
00.710.0304.6	140	90.210.0544.2	115	91.022.0253.0	78	91.050.3351.0	101
00.710.0304.7	140	90.210.1020.2	114	91.022.0353.0	78	91.050.5953.0	101
00.710.0323.7	141	90.210.1023.2	114	91.022.0453.0	78	91.050.5953.1	101
00.710.0324.7	141	90.210.1024.2	115	91.022.0553.0	78	91.050.6053.0	101
00.710.1323.1	141	90.210.1040.2	114	91.022.1053.0	78	91.051.0053.0	100
00.710.1324.1	141	90.210.2020.2	114	91.022.1153.0	78	91.051.0053.1	100
00.712.0303.1	140	90.210.2023.2	114	91.023.0053.0	77	91.051.0153.0	100
00.712.0303.6	140	90.210.2520.2	114	91.023.0053.1	77	91.051.0153.1	100
00.712.0303.7	140	90.210.2524.2	115	91.023.0153.0	77	91.051.0253.0	100
00.712.0323.7	141	90.210.3020.2	114	91.023.0153.1	77	91.051.0353.0	100
00.712.1323.1	141	90.210.3040.2	114	91.023.0253.0	77	91.051.0453.0	100
05.507.4153.0	146	90.210.5020.2	114	91.023.0353.0	77	91.051.0553.0	100
05.561.3653.0	61	90.210.5023.2	114	91.023.0453.0	77	91.051.1253.0	100
05.561.3653.1	61	90.210.5024.2	115	91.023.0553.0	77	91.051.1353.0	100
05.562.3000.0	143	90.215.0530.2	112	91.023.1053.0	77	91.051.1453.0	100
05.562.3000.0	146	90.215.0533.2	113	91.023.1153.0	77	91.051.1553.0	100
05.562.3612.0	60	90.215.0534.2	113	91.024.0053.0	77	91.052.0053.0	100
05.563.7753.0	135	90.215.1030.2	112	91.024.0053.1	77	91.052.0053.1	100
05.563.7853.0	135	90.215.1033.2	113	91.024.0153.0	77	91.052.0153.0	100
05.563.9453.0	146	90.215.1034.2	113	91.024.0153.1	77	91.052.0153.1	100
05.563.9553.0	146	90.215.1530.2	112	91.024.0253.0	77	91.052.0253.0	100
05.563.9753.0	146	90.215.1533.2	113	91.024.0353.0	77	91.052.0353.0	100
05.564.5353.0	61	90.215.1534.2	113	91.024.0453.0	77	91.052.0453.0	100
05.564.5353.2	61	90.220.0523.2	114	91.024.0553.0	77	91.052.0553.0	100
05.566.9153.0	61	90.220.0524.2	115	91.024.1053.0	77	91.052.1253.0	100
05.566.9253.0	61	90.220.1020.2	114	91.024.1153.0	77	91.052.1353.0	100
05.583.1853.0	61	90.220.3020.2	114	91.030.4953.0	87	91.052.1453.0	100
05.587.3156.0	62	90.230.0523.2	114	91.030.4953.1	87	91.052.1553.0	100
05.587.3156.1	62	90.230.0524.2	115	91.030.5253.0	87	91.053.0053.0	99
05.588.5753.0	62	90.230.0526.2	111	91.030.5253.1	87	91.053.0053.1	99
05.588.5753.1	62	90.230.0544.2	115	91.030.5853.0	87	91.053.0153.0	99
05.590.4556.0	62	90.230.1020.2	114	91.030.5853.1	87	91.053.0153.1	99
05.590.4556.1	62	90.230.1040.2	114	91.030.5953.0	87	91.053.0253.0	99
05.594.4250.0	61	90.230.2024.2	115	91.030.5953.1	87	91.053.0353.0	99
05.594.4253.0	61	90.230.3020.2	114	91.030.6053.0	87	91.053.0453.0	99
05.595.1453.0	62	90.230.3040.2	114	91.030.6053.1	87	91.053.0553.0	99
05.595.1453.2	62	90.240.0503.2	118	91.031.0053.0	86	91.053.1253.0	99
06.560.4153.0	179	90.240.0504.2	118	91.031.0053.1	86	91.053.1353.0	99
06.561.7853.0	62	90.240.0505.2	119	91.031.0153.0	86	91.053.1453.0	99
06.562.0653.0	143	90.240.0506.2	116	91.031.0153.1	86	91.053.1553.0	99
06.562.3100.0	111	90.240.1000.2	117	91.031.0653.0	86	91.054.0053.0	99
06.562.3200.0	111	90.240.3000.2	117	91.031.0753.0	86	91.054.0053.1	99
06.562.4353.0	143	91.020.1053.0	79	91.032.0053.0	86	91.054.0153.0	99
07.413.5453.0	60	91.020.1053.1	79	91.032.0053.1	86	91.054.0153.1	99
07.413.5453.1	60	91.020.1253.0	79	91.032.0153.0	86	91.054.0253.0	99
07.413.5553.0	60	91.020.1453.0	79	91.032.0153.1	86	91.054.0353.0	99
07.413.5553.1	60	91.020.1853.0	79	91.032.0653.0	86	91.054.0453.0	99
07.413.6853.1	60	91.020.4953.0	79	91.032.0753.0	86	91.054.0553.0	99
07.418.9153.1	106	91.020.4953.1	79	91.033.0053.0	86	91.054.1253.0	99
07.418.9253.1	106	91.020.5053.0	79	91.033.0053.1	86	91.054.1353.0	99
07.425.8753.0	64	91.020.5153.0	79	91.033.0153.0	85	91.054.1453.0	99
07.425.8853.0	64	91.020.5353.0	79	91.033.0153.1	85	91.054.1553.0	99
07.425.8953.0	64	91.020.5453.0	141	91.033.0653.0	86	91.207.1000.2	95
34.399.1673.1	168	91.020.5953.0	79	91.033.0753.0	85	91.207.1003.2	96
46.413.1302.50	68	91.020.5953.1	79	91.034.0053.0	86	91.207.1004.2	96
84.990.1242.0	63	91.020.6053.0	79	91.034.0053.1	86	91.207.1060.2	95
84.990.1243.0	63	91.020.6153.0	79	91.034.0153.0	85	91.207.1063.2	96
90.000.0153.0	111	91.020.6353.0	79	91.034.0153.1	85	91.207.1064.2	96
90.001.0153.0	110	91.020.7053.0	79	91.034.0653.0	86	91.207.2000.2	95
90.002.0153.0	110	91.020.7053.1	79	91.034.0753.0	85	91.207.2003.2	96
90.010.0153.0	111	91.020.7153.0	79	91.041.0053.0	94	91.207.2004.2	96
90.011.0153.0	110	91.020.7253.0	79	91.041.0053.1	94	91.207.2060.2	95
90.012.0153.0	110	91.020.7453.0	79	91.041.0153.0	94	91.207.2063.2	96
90.020.0153.0	111	91.021.0053.0	78	91.041.0153.1	94	91.207.2064.2	96
90.021.0153.0	110	91.021.0053.1	78	91.042.0053.0	94	91.207.3000.2	95
90.022.0153.0	110	91.021.0153.0	78	91.042.0053.1	94	91.207.3003.2	96
90.030.0153.0	111	91.021.0153.1	78	91.042.0153.0	94	91.207.3004.2	96
90.031.0153.0	110	91.021.0253.0	78	91.042.0153.1	94	91.207.3060.2	95
90.032.0153.0	110	91.021.0353.0	78	91.043.0053.0	93	91.207.3063.2	96
90.200.0523.2	114	91.021.0453.0	78	91.043.0053.1	93	91.207.3064.2	96

91.207.4000.2	95	91.222.3003.6	81	91.222.7000.1	80	91.232.2069.1	90
91.207.4003.2	96	91.222.3003.9	81	91.222.7000.2	80	91.232.2069.2	90
91.207.4004.2	96	91.222.3004.1	82	91.222.7000.6	80	91.232.3000.1	88
91.207.4060.2	95	91.222.3004.2	82	91.222.7000.9	80	91.232.3000.2	88
91.207.4063.2	96	91.222.3004.6	82	91.222.7003.1	81	91.232.3000.4	88
91.207.4064.2	96	91.222.3004.9	82	91.222.7003.2	81	91.232.3003.1	89
91.207.5000.2	95	91.222.3060.1	80	91.222.7003.6	81	91.232.3003.2	89
91.207.5003.2	96	91.222.3060.2	80	91.222.7003.9	81	91.232.3003.4	89
91.207.5004.2	96	91.222.3060.9	80	91.222.7004.1	82	91.232.3004.1	89
91.207.5060.2	95	91.222.3063.1	81	91.222.7004.2	82	91.232.3004.2	89
91.207.5063.2	96	91.222.3063.2	81	91.222.7004.6	82	91.232.3004.4	89
91.207.5064.2	96	91.222.3063.9	81	91.222.7004.9	82	91.232.3009.1	90
91.207.6000.2	95	91.222.3064.1	82	91.222.7060.1	80	91.232.3009.2	90
91.207.6003.2	96	91.222.3064.2	82	91.222.7060.2	80	91.232.3060.1	88
91.207.6004.2	96	91.222.3064.9	82	91.222.7060.9	80	91.232.3060.2	88
91.207.6060.2	95	91.222.4000.1	80	91.222.7063.1	81	91.232.3063.1	89
91.207.6063.2	96	91.222.4000.2	80	91.222.7063.2	81	91.232.3063.2	89
91.207.6064.2	96	91.222.4000.6	80	91.222.7063.9	81	91.232.3064.1	89
91.207.7000.2	95	91.222.4000.9	80	91.222.7064.1	82	91.232.3064.2	89
91.207.7003.2	96	91.222.4003.1	81	91.222.7064.2	82	91.232.3069.1	90
91.207.7004.2	96	91.222.4003.2	81	91.222.7064.9	82	91.232.3069.2	90
91.207.7060.2	95	91.222.4003.6	81	91.222.8000.1	80	91.232.4000.1	88
91.207.7063.2	96	91.222.4003.9	81	91.222.8000.2	80	91.232.4000.2	88
91.207.7064.2	96	91.222.4004.1	82	91.222.8000.6	80	91.232.4000.4	88
91.207.8000.2	95	91.222.4004.2	82	91.222.8000.9	80	91.232.4003.1	89
91.207.8003.2	96	91.222.4004.6	82	91.222.8003.1	81	91.232.4003.2	89
91.207.8004.2	96	91.222.4004.9	82	91.222.8003.2	81	91.232.4003.4	89
91.207.8060.2	95	91.222.4060.1	80	91.222.8003.6	81	91.232.4004.1	89
91.207.8063.2	96	91.222.4060.2	80	91.222.8003.9	81	91.232.4004.2	89
91.207.8064.2	96	91.222.4060.9	80	91.222.8004.1	82	91.232.4004.4	89
91.222.1000.1	80	91.222.4063.1	81	91.222.8004.2	82	91.232.4009.1	90
91.222.1000.2	80	91.222.4063.2	81	91.222.8004.6	82	91.232.4009.2	90
91.222.1000.6	80	91.222.4063.9	81	91.222.8004.9	82	91.232.4060.1	88
91.222.1000.9	80	91.222.4064.1	82	91.222.8060.1	80	91.232.4060.2	88
91.222.1003.1	81	91.222.4064.2	82	91.222.8060.2	80	91.232.4063.1	89
91.222.1003.2	81	91.222.4064.9	82	91.222.8060.9	80	91.232.4063.2	89
91.222.1003.6	81	91.222.5000.1	80	91.222.8063.1	81	91.232.4064.1	89
91.222.1003.9	81	91.222.5000.2	80	91.222.8063.2	81	91.232.4064.2	89
91.222.1004.1	82	91.222.5000.6	80	91.222.8063.9	81	91.232.4069.1	90
91.222.1004.2	82	91.222.5000.9	80	91.222.8064.1	82	91.232.4069.2	90
91.222.1004.6	82	91.222.5003.1	81	91.222.8064.2	82	91.232.5000.1	88
91.222.1004.9	82	91.222.5003.2	81	91.222.8064.9	82	91.232.5000.2	88
91.222.1060.1	80	91.222.5003.6	81	91.232.1000.1	88	91.232.5000.4	88
91.222.1060.2	80	91.222.5003.9	81	91.232.1000.2	88	91.232.5003.1	89
91.222.1060.9	80	91.222.5004.1	82	91.232.1000.4	88	91.232.5003.2	89
91.222.1063.1	81	91.222.5004.2	82	91.232.1003.1	89	91.232.5003.4	89
91.222.1063.2	81	91.222.5004.6	82	91.232.1003.2	89	91.232.5004.1	89
91.222.1063.9	81	91.222.5004.9	82	91.232.1003.4	89	91.232.5004.2	89
91.222.1064.1	82	91.222.5060.1	80	91.232.1004.1	89	91.232.5004.4	89
91.222.1064.2	82	91.222.5060.2	80	91.232.1004.2	89	91.232.5009.1	90
91.222.1064.9	82	91.222.5060.9	80	91.232.1004.4	89	91.232.5009.2	90
91.222.2000.1	80	91.222.5063.1	81	91.232.1009.1	90	91.232.5060.1	88
91.222.2000.2	80	91.222.5063.2	81	91.232.1009.2	90	91.232.5060.2	88
91.222.2000.6	80	91.222.5063.9	81	91.232.1060.1	88	91.232.5063.1	89
91.222.2000.9	80	91.222.5064.1	82	91.232.1060.2	88	91.232.5063.2	89
91.222.2003.1	81	91.222.5064.2	82	91.232.1063.1	89	91.232.5064.1	89
91.222.2003.2	81	91.222.5064.9	82	91.232.1063.2	89	91.232.5064.2	89
91.222.2003.6	81	91.222.6000.1	80	91.232.1064.1	89	91.232.5069.1	90
91.222.2003.9	81	91.222.6000.2	80	91.232.1064.2	89	91.232.5069.2	90
91.222.2004.1	82	91.222.6000.6	80	91.232.1069.1	90	91.232.6000.1	88
91.222.2004.2	82	91.222.6000.9	80	91.232.1069.2	90	91.232.6000.2	88
91.222.2004.6	82	91.222.6003.1	81	91.232.2000.1	88	91.232.6000.4	88
91.222.2004.9	82	91.222.6003.2	81	91.232.2000.2	88	91.232.6003.1	89
91.222.2060.1	80	91.222.6003.6	81	91.232.2000.4	88	91.232.6003.2	89
91.222.2060.2	80	91.222.6003.9	81	91.232.2003.1	89	91.232.6003.4	89
91.222.2060.9	80	91.222.6004.1	82	91.232.2003.2	89	91.232.6004.1	89
91.222.2063.1	81	91.222.6004.2	82	91.232.2003.4	89	91.232.6004.2	89
91.222.2063.2	81	91.222.6004.6	82	91.232.2004.1	89	91.232.6004.4	89
91.222.2063.9	81	91.222.6004.9	82	91.232.2004.2	89	91.232.6009.1	90
91.222.2064.1	82	91.222.6060.1	80	91.232.2004.4	89	91.232.6009.2	90
91.222.2064.2	82	91.222.6060.2	80	91.232.2009.1	90	91.232.6060.1	88
91.222.2064.9	82	91.222.6060.9	80	91.232.2009.2	90	91.232.6060.2	88
91.222.3000.1	80	91.222.6063.1	81	91.232.2060.1	88	91.232.6063.1	89
91.222.3000.2	80	91.222.6063.2	81	91.232.2060.2	88	91.232.6063.2	89
91.222.3000.6	80	91.222.6063.9	81	91.232.2063.1	89	91.232.6064.1	89
91.222.3000.9	80	91.222.6064.1	82	91.232.2063.2	89	91.232.6064.2	89
91.222.3003.1	81	91.222.6064.2	82	91.232.2064.1	89	91.232.6069.1	90
91.222.3003.2	81	91.222.6064.9	82	91.232.2064.2	89	91.232.6069.2	90

Part number | page

91.232.7000.1	88	91.257.2064.2	104	91.257.7003.9	103	91.932.9853.0	85
91.232.7000.2	88	91.257.2064.9	104	91.257.7004.1	104	91.941.3053.0	92
91.232.7000.4	88	91.257.3000.1	102	91.257.7004.2	104	91.941.3053.1	92
91.232.7003.1	89	91.257.3000.2	102	91.257.7004.9	104	91.941.4053.0	92
91.232.7003.2	89	91.257.3000.9	102	91.257.7060.1	102	91.941.4053.1	92
91.232.7003.4	89	91.257.3003.1	103	91.257.7060.2	102	91.941.9053.0	93
91.232.7004.1	89	91.257.3003.2	103	91.257.7060.9	102	91.941.9053.1	93
91.232.7004.2	89	91.257.3003.9	103	91.257.7063.1	103	91.942.3053.0	92
91.232.7004.4	89	91.257.3004.1	104	91.257.7063.2	103	91.942.3053.1	92
91.232.7009.1	90	91.257.3004.2	104	91.257.7063.9	103	91.942.4053.0	92
91.232.7009.2	90	91.257.3004.9	104	91.257.7064.1	104	91.942.4053.1	92
91.232.7060.1	88	91.257.3060.2	102	91.257.7064.2	104	91.942.9053.0	93
91.232.7060.2	88	91.257.3060.9	102	91.257.7064.9	104	91.942.9053.1	93
91.232.7063.1	89	91.257.3063.1	103	91.257.8000.1	102	91.951.3053.0	98
91.232.7063.2	89	91.257.3063.2	103	91.257.8000.2	102	91.951.3053.1	98
91.232.7064.1	89	91.257.3063.9	103	91.257.8000.9	102	91.951.3253.0	98
91.232.7064.2	89	91.257.3064.1	104	91.257.8003.1	103	91.951.3353.0	98
91.232.7069.1	90	91.257.3064.2	104	91.257.8003.2	103	91.951.3453.0	98
91.232.7069.2	90	91.257.3064.9	104	91.257.8003.9	103	91.951.3653.0	98
91.232.8000.1	88	91.257.4000.1	102	91.257.8004.1	104	91.951.4053.0	98
91.232.8000.2	88	91.257.4000.2	102	91.257.8004.2	104	91.951.4053.1	98
91.232.8000.4	88	91.257.4000.9	102	91.257.8004.9	104	91.951.4253.0	98
91.232.8003.1	89	91.257.4003.1	103	91.257.8060.1	102	91.951.4353.0	98
91.232.8003.2	89	91.257.4003.2	103	91.257.8060.2	102	91.951.4453.0	98
91.232.8003.4	89	91.257.4003.9	103	91.257.8060.9	102	91.951.4653.0	98
91.232.8004.1	89	91.257.4004.1	104	91.257.8063.1	103	91.951.9053.0	99
91.232.8004.2	89	91.257.4004.2	104	91.257.8063.2	103	91.951.9053.1	146
91.232.8004.4	89	91.257.4004.9	104	91.257.8063.9	103	91.951.9053.1	99
91.232.8009.1	90	91.257.4060.1	102	91.257.8064.1	104	91.951.9053.1	146
91.232.8009.2	90	91.257.4060.2	102	91.257.8064.2	104	91.951.9253.0	99
91.232.8060.1	88	91.257.4060.9	102	91.257.8064.9	104	91.951.9353.0	99
91.232.8060.2	88	91.257.4063.1	103	91.921.2053.0	76	91.951.9453.0	99
91.232.8063.1	89	91.257.4063.2	103	91.921.2053.1	76	91.951.9453.0	146
91.232.8063.2	89	91.257.4063.9	103	91.921.2353.0	76	91.951.9653.0	99
91.232.8064.1	89	91.257.4064.1	104	91.921.2453.0	76	91.952.3053.0	98
91.232.8064.2	89	91.257.4064.2	104	91.921.3053.0	76	91.952.3053.1	98
91.232.8069.1	90	91.257.4064.9	104	91.921.3053.1	76	91.952.3253.0	98
91.232.8069.2	90	91.257.5000.1	102	91.921.3353.0	76	91.952.3353.0	98
91.252.1060.1	102	91.257.5000.2	102	91.921.3453.0	76	91.952.3453.0	98
91.252.3060.1	102	91.257.5000.9	102	91.921.3553.0	76	91.952.3653.0	98
91.253.1060.2	105	91.257.5003.1	103	91.921.9053.0	77	91.952.4053.0	98
91.253.2060.2	105	91.257.5003.2	103	91.921.9053.1	77	91.952.4053.1	98
91.253.4060.2	105	91.257.5003.9	103	91.921.9353.0	77	91.952.4253.0	98
91.253.6060.2	105	91.257.5004.1	104	91.921.9453.0	77	91.952.4353.0	98
91.253.8060.2	105	91.257.5004.2	104	91.921.9553.0	77	91.952.4453.0	98
91.257.1000.1	102	91.257.5004.9	104	91.922.2053.0	76	91.952.4653.0	98
91.257.1000.2	102	91.257.5060.1	102	91.922.2053.1	76	91.952.9053.0	99
91.257.1000.9	102	91.257.5060.2	102	91.922.2353.0	76	91.952.9053.1	99
91.257.1003.1	103	91.257.5060.9	102	91.922.2453.0	76	91.952.9253.0	99
91.257.1003.2	103	91.257.5063.1	103	91.922.3053.0	76	91.952.9353.0	99
91.257.1003.9	103	91.257.5063.2	103	91.922.3053.1	76	91.952.9453.0	99
91.257.1004.1	104	91.257.5063.9	103	91.922.3353.0	76	91.952.9653.0	99
91.257.1004.2	104	91.257.5064.1	104	91.922.3453.0	76	92.002.5053.0	72
91.257.1004.9	104	91.257.5064.2	104	91.922.3553.0	76	92.002.5153.1	72
91.257.1060.2	102	91.257.5064.9	104	91.922.9053.0	77	92.002.5253.1	72
91.257.1060.9	102	91.257.6000.1	102	91.922.9053.1	77	92.002.5353.0	72
91.257.1063.1	103	91.257.6000.2	102	91.922.9353.0	77	92.020.2053.0	68
91.257.1063.2	103	91.257.6000.9	102	91.922.9453.0	77	92.030.0053.1	12
91.257.1063.9	103	91.257.6003.1	103	91.922.9553.0	77	92.030.0153.1	12
91.257.1064.1	104	91.257.6003.2	103	91.931.3053.0	84	92.030.0253.1	12
91.257.1064.2	104	91.257.6003.9	103	91.931.3053.1	84	92.030.0353.1	12
91.257.1064.9	104	91.257.6004.1	104	91.931.3853.0	84	92.030.0953.0	12
91.257.2000.1	102	91.257.6004.2	104	91.931.4053.0	84	92.030.0953.1	12
91.257.2000.2	102	91.257.6004.9	104	91.931.4053.1	84	92.030.1053.0	13
91.257.2000.9	102	91.257.6060.1	102	91.931.9053.0	85	92.030.1053.1	13
91.257.2003.1	103	91.257.6060.2	102	91.931.9053.1	85	92.030.1253.0	13
91.257.2003.2	103	91.257.6060.9	102	91.931.9153.0	85	92.030.1253.1	13
91.257.2003.9	103	91.257.6063.1	103	91.931.9153.1	85	92.030.1353.0	13
91.257.2004.1	104	91.257.6063.2	103	91.931.9853.0	85	92.030.2153.0	68
91.257.2004.2	104	91.257.6063.9	103	91.932.3053.0	84	92.030.2253.0	69
91.257.2004.9	104	91.257.6064.1	104	91.932.3053.1	84	92.030.3053.0	13
91.257.2060.1	102	91.257.6064.2	104	91.932.3853.0	84	92.030.3053.1	13
91.257.2060.2	102	91.257.6064.9	104	91.932.4053.0	84	92.030.3153.0	13
91.257.2060.9	102	91.257.7000.1	102	91.932.4053.1	84	92.030.3153.1	13
91.257.2063.1	103	91.257.7000.2	102	91.932.9053.0	85	92.030.3553.0	13
91.257.2063.2	103	91.257.7000.9	102	91.932.9053.1	85	92.030.3553.5	13
91.257.2063.9	103	91.257.7003.1	103	91.932.9153.0	85	92.030.3653.0	13
91.257.2064.1	104	91.257.7003.2	103	91.932.9153.1	85	92.030.3653.5	13

92.030.4853.0	11	92.032.8558.0	9	92.050.1553.1	142	92.052.8358.0	43
92.030.4853.1	11	92.032.8758.0	8	92.050.1653.0	140	92.052.8658.0	43
92.030.4953.0	11	92.032.8758.1	8	92.050.1853.0	45	92.052.9658.0	43
92.030.4953.1	11	92.032.9658.0	9	92.050.2153.0	45	92.052.9658.1	43
92.030.5253.0	12	92.032.9658.1	9	92.050.2153.5	45	92.052.9758.0	43
92.030.5253.1	12	92.032.9758.0	9	92.050.2453.0	69	92.052.9758.5	43
92.030.5353.0	12	92.032.9758.5	9	92.050.3053.0	47	92.053.0058.0	44
92.030.5353.1	12	92.033.0057.0	71	92.050.3053.1	47	92.053.0058.1	44
92.030.5853.0	14	92.033.0058.0	10	92.050.3153.0	47	92.053.0258.0	44
92.030.5958.0	14	92.033.0058.1	10	92.050.3153.1	47	92.053.0458.0	44
92.030.5958.1	14	92.033.0158.0	10	92.050.3253.0	47	92.054.0058.0	44
92.030.6053.0	11	92.033.0158.5	10	92.050.3253.1	47	92.054.0058.1	44
92.030.6053.1	11	92.033.0458.0	10	92.050.3353.0	47	92.054.0458.0	44
92.030.6953.0	11	92.033.0658.0	10	92.050.3353.1	47	92.060.3053.1	57
92.030.6953.1	11	92.033.0758.0	10	92.050.3453.0	47	92.061.8658.1	57
92.030.7053.0	11	92.034.0057.0	71	92.050.3553.0	47	92.062.8658.1	57
92.030.7053.5	11	92.034.0058.0	10	92.050.3553.5	47	92.207.1000.0	36
92.030.7153.0	11	92.034.0058.1	10	92.050.3653.0	47	92.207.1000.1	36
92.030.7253.0	11	92.034.0158.0	10	92.050.3653.5	47	92.207.1000.2	36
92.030.7553.0	11	92.034.0158.5	10	92.050.3753.0	47	92.207.1000.3	36
92.031.0058.0	10	92.034.0458.0	10	92.050.3753.5	47	92.207.1000.7	36
92.031.0058.1	10	92.034.0658.0	10	92.050.3853.0	47	92.207.1003.0	37
92.031.0158.0	10	92.040.1053.0	35	92.050.3853.5	47	92.207.1003.1	37
92.031.0158.5	10	92.040.1053.1	35	92.050.4153.0	46	92.207.1003.2	37
92.031.0458.0	10	92.040.1153.0	35	92.050.4153.1	46	92.207.1003.3	37
92.031.0658.0	10	92.040.1153.5	35	92.050.4253.0	46	92.207.1003.7	37
92.031.0758.0	10	92.040.6953.0	35	92.050.4253.1	46	92.207.1004.0	38
92.031.3258.0	9	92.040.6953.1	35	92.050.4353.0	46	92.207.1004.1	38
92.031.3258.1	9	92.040.7053.0	35	92.050.4353.1	46	92.207.1004.2	38
92.031.3458.0	9	92.040.7053.5	35	92.050.6953.0	45	92.207.1004.3	38
92.031.3458.5	9	92.040.7153.0	35	92.050.6953.1	45	92.207.1004.7	38
92.031.3558.0	9	92.040.7253.0	35	92.050.7053.0	45	92.207.1014.1	38
92.031.3658.0	9	92.041.0058.0	34	92.050.7053.5	45	92.207.1060.0	36
92.031.3758.0	9	92.041.0058.1	34	92.050.7153.0	45	92.207.1060.1	36
92.031.3858.0	9	92.041.0158.0	34	92.050.7253.0	45	92.207.1060.2	36
92.031.3958.0	9	92.041.3253.0	33	92.050.7353.0	45	92.207.1060.3	36
92.031.4453.0	8	92.041.3253.1	33	92.050.7453.0	45	92.207.1060.7	36
92.031.4453.1	8	92.041.3453.0	33	92.050.8453.0	145	92.207.1060.8	36
92.031.4853.0	8	92.041.3453.5	33	92.050.8553.0	145	92.207.1063.0	37
92.031.4953.0	8	92.041.3553.0	33	92.050.8853.0	144	92.207.1063.1	37
92.031.5453.1	140	92.041.3953.0	33	92.050.9053.0	144	92.207.1063.2	37
92.031.5453.1	142	92.041.8058.0	33	92.050.9153.0	144	92.207.1063.3	37
92.031.7657.0	71	92.041.8258.0	33	92.051.0058.0	44	92.207.1063.7	37
92.031.7657.1	71	92.041.9658.0	33	92.051.0058.1	44	92.207.1063.8	37
92.031.7658.0	9	92.041.9658.1	33	92.051.0258.0	44	92.207.1064.0	38
92.031.7658.1	9	92.041.9758.0	33	92.051.0458.0	44	92.207.1064.1	38
92.031.8058.0	9	92.041.9758.5	33	92.051.3153.0	43	92.207.1064.2	38
92.031.8258.0	9	92.042.0058.0	34	92.051.3253.0	43	92.207.1064.3	38
92.031.8458.0	9	92.042.0058.1	34	92.051.3253.1	43	92.207.1064.7	38
92.031.8558.0	9	92.042.0158.0	34	92.051.3453.0	43	92.207.1064.8	38
92.031.8758.0	8	92.042.3353.0	33	92.051.3453.5	43	92.207.2000.0	36
92.031.8758.1	8	92.042.3353.1	33	92.051.3553.0	43	92.207.2000.1	36
92.031.9658.0	9	92.042.3453.0	33	92.051.3753.0	43	92.207.2000.2	36
92.031.9658.1	9	92.042.3453.5	33	92.051.3953.0	43	92.207.2000.3	36
92.031.9758.0	9	92.042.3553.0	33	92.051.5453.1	140	92.207.2000.7	36
92.031.9758.5	9	92.042.3953.0	33	92.051.5453.1	142	92.207.2003.0	37
92.032.0058.0	10	92.042.8058.0	33	92.051.5553.0	140	92.207.2003.1	37
92.032.0058.1	10	92.042.8258.0	33	92.051.8058.0	43	92.207.2003.2	37
92.032.0158.0	10	92.042.9658.0	33	92.051.8258.0	43	92.207.2003.3	37
92.032.0158.5	10	92.042.9658.1	33	92.051.8358.0	43	92.207.2003.7	37
92.032.0458.0	10	92.042.9758.0	33	92.051.8658.0	43	92.207.2004.0	38
92.032.0658.0	10	92.042.9758.5	33	92.051.9658.0	43	92.207.2004.1	38
92.032.3358.0	9	92.043.0058.0	34	92.051.9658.1	43	92.207.2004.2	38
92.032.3358.1	9	92.043.0058.1	34	92.051.9758.0	43	92.207.2004.3	38
92.032.3458.0	9	92.043.0158.0	34	92.051.9758.5	43	92.207.2004.7	38
92.032.3458.5	9	92.043.0158.5	34	92.052.0058.0	44	92.207.2010.1	36
92.032.3558.0	9	92.044.0058.0	34	92.052.0058.1	44	92.207.2013.1	37
92.032.3658.0	9	92.044.0058.1	34	92.052.0458.0	44	92.207.2014.1	38
92.032.3758.0	9	92.044.0158.0	34	92.052.3153.0	43	92.207.2060.0	36
92.032.3858.0	9	92.044.0158.5	34	92.052.3353.0	43	92.207.2060.1	36
92.032.3958.0	9	92.050.0153.0	45	92.052.3353.1	43	92.207.2060.2	36
92.032.7657.0	71	92.050.0153.1	45	92.052.3453.0	43	92.207.2060.3	36
92.032.7657.1	71	92.050.0353.0	45	92.052.3453.5	43	92.207.2060.7	36
92.032.7658.0	9	92.050.0353.1	45	92.052.3553.0	43	92.207.2060.8	36
92.032.7658.1	9	92.050.1053.0	46	92.052.3753.0	43	92.207.2063.0	37
92.032.8058.0	9	92.050.1053.1	46	92.052.3953.0	43	92.207.2063.1	37
92.032.8258.0	9	92.050.1453.0	46	92.052.8058.0	43	92.207.2063.2	37
92.032.8458.0	9	92.050.1553.1	140	92.052.8258.0	43	92.207.2063.3	37

Part number | page

92.207.2063.7	37	92.207.5000.0	36	92.207.7004.0	38	92.208.2003.2	40
92.207.2063.8	37	92.207.5000.1	36	92.207.7004.1	38	92.208.2003.3	40
92.207.2064.0	38	92.207.5000.2	36	92.207.7004.2	38	92.208.2004.1	40
92.207.2064.1	38	92.207.5000.3	36	92.207.7004.3	38	92.208.2004.2	40
92.207.2064.2	38	92.207.5000.7	36	92.207.7004.7	38	92.208.2004.3	40
92.207.2064.3	38	92.207.5003.0	37	92.207.7060.0	36	92.208.2060.1	39
92.207.2064.7	38	92.207.5003.1	37	92.207.7060.1	36	92.208.2060.3	39
92.207.2064.8	38	92.207.5003.2	37	92.207.7060.2	36	92.208.2063.1	40
92.207.3000.0	36	92.207.5003.3	37	92.207.7060.3	36	92.208.2063.3	40
92.207.3000.1	36	92.207.5003.7	37	92.207.7060.7	36	92.208.2064.1	40
92.207.3000.2	36	92.207.5004.0	38	92.207.7060.8	36	92.208.2064.3	40
92.207.3000.3	36	92.207.5004.1	38	92.207.7063.0	37	92.208.3000.1	39
92.207.3000.7	36	92.207.5004.2	38	92.207.7063.1	37	92.208.3000.3	39
92.207.3003.0	37	92.207.5004.3	38	92.207.7063.2	37	92.208.3003.1	40
92.207.3003.1	37	92.207.5004.7	38	92.207.7063.3	37	92.208.3003.2	40
92.207.3003.2	37	92.207.5010.1	36	92.207.7063.7	37	92.208.3003.3	40
92.207.3003.3	37	92.207.5014.1	38	92.207.7063.8	37	92.208.3004.1	40
92.207.3003.7	37	92.207.5060.0	36	92.207.7064.0	38	92.208.3004.2	40
92.207.3004.0	38	92.207.5060.1	36	92.207.7064.1	38	92.208.3004.3	40
92.207.3004.1	38	92.207.5060.2	36	92.207.7064.2	38	92.208.3060.1	39
92.207.3004.2	38	92.207.5060.3	36	92.207.7064.3	38	92.208.3060.3	39
92.207.3004.3	38	92.207.5060.7	36	92.207.7064.7	38	92.208.3063.1	40
92.207.3004.7	38	92.207.5060.8	36	92.207.7064.8	38	92.208.3063.3	40
92.207.3010.1	36	92.207.5063.0	37	92.207.8000.0	36	92.208.3064.1	40
92.207.3014.1	38	92.207.5063.1	37	92.207.8000.1	36	92.208.3064.3	40
92.207.3060.0	36	92.207.5063.2	37	92.207.8000.2	36	92.208.4000.1	39
92.207.3060.1	36	92.207.5063.3	37	92.207.8000.3	36	92.208.4000.2	39
92.207.3060.2	36	92.207.5063.7	37	92.207.8000.7	36	92.208.4000.3	39
92.207.3060.3	36	92.207.5063.8	37	92.207.8003.0	37	92.208.4003.1	40
92.207.3060.7	36	92.207.5064.0	38	92.207.8003.1	37	92.208.4003.2	40
92.207.3060.8	36	92.207.5064.1	38	92.207.8003.2	37	92.208.4003.3	40
92.207.3063.0	37	92.207.5064.2	38	92.207.8003.3	37	92.208.4004.1	40
92.207.3063.1	37	92.207.5064.3	38	92.207.8003.7	37	92.208.4004.2	40
92.207.3063.2	37	92.207.5064.7	38	92.207.8004.0	38	92.208.4004.3	40
92.207.3063.3	37	92.207.5064.8	38	92.207.8004.1	38	92.208.4060.1	39
92.207.3063.7	37	92.207.6000.0	36	92.207.8004.2	38	92.208.4060.2	39
92.207.3063.8	37	92.207.6000.1	36	92.207.8004.3	38	92.208.4060.3	39
92.207.3064.0	38	92.207.6000.2	36	92.207.8004.7	38	92.208.4063.1	40
92.207.3064.1	38	92.207.6000.3	36	92.207.8060.0	36	92.208.4063.2	40
92.207.3064.2	38	92.207.6000.7	36	92.207.8060.1	36	92.208.4063.3	40
92.207.3064.3	38	92.207.6003.0	37	92.207.8060.2	36	92.208.4064.1	40
92.207.3064.7	38	92.207.6003.1	37	92.207.8060.3	36	92.208.4064.2	40
92.207.3064.8	38	92.207.6003.2	37	92.207.8060.7	36	92.208.4064.3	40
92.207.4000.0	36	92.207.6003.3	37	92.207.8060.8	36	92.208.5000.1	39
92.207.4000.1	36	92.207.6003.7	37	92.207.8063.0	37	92.208.5000.2	39
92.207.4000.2	36	92.207.6004.0	38	92.207.8063.1	37	92.208.5000.3	39
92.207.4000.3	36	92.207.6004.1	38	92.207.8063.2	37	92.208.5003.1	40
92.207.4000.7	36	92.207.6004.2	38	92.207.8063.3	37	92.208.5003.2	40
92.207.4003.0	37	92.207.6004.3	38	92.207.8063.7	37	92.208.5003.3	40
92.207.4003.1	37	92.207.6004.7	38	92.207.8063.8	37	92.208.5004.1	40
92.207.4003.2	37	92.207.6060.0	36	92.207.8064.0	38	92.208.5004.2	40
92.207.4003.3	37	92.207.6060.1	36	92.207.8064.1	38	92.208.5004.3	40
92.207.4003.7	37	92.207.6060.2	36	92.207.8064.2	38	92.208.5060.1	39
92.207.4004.0	38	92.207.6060.3	36	92.207.8064.3	38	92.208.5060.2	39
92.207.4004.1	38	92.207.6060.7	36	92.207.8064.7	38	92.208.5060.3	39
92.207.4004.2	38	92.207.6060.8	36	92.207.8064.8	38	92.208.5063.1	40
92.207.4004.3	38	92.207.6063.0	37	92.208.1000.1	39	92.208.5063.2	40
92.207.4004.7	38	92.207.6063.1	37	92.208.1000.2	39	92.208.5063.3	40
92.207.4010.1	36	92.207.6063.2	37	92.208.1000.3	39	92.208.5064.1	40
92.207.4014.1	38	92.207.6063.3	37	92.208.1003.1	40	92.208.5064.2	40
92.207.4060.0	36	92.207.6063.7	37	92.208.1003.2	40	92.208.5064.3	40
92.207.4060.1	36	92.207.6063.8	37	92.208.1003.3	40	92.208.6000.1	39
92.207.4060.2	36	92.207.6064.0	38	92.208.1004.1	40	92.208.6000.2	39
92.207.4060.3	36	92.207.6064.1	38	92.208.1004.2	40	92.208.6000.3	39
92.207.4060.7	36	92.207.6064.2	38	92.208.1004.3	40	92.208.6003.1	40
92.207.4060.8	36	92.207.6064.3	38	92.208.1060.1	39	92.208.6003.2	40
92.207.4063.0	37	92.207.6064.7	38	92.208.1060.2	39	92.208.6003.3	40
92.207.4063.1	37	92.207.6064.8	38	92.208.1060.3	39	92.208.6004.1	40
92.207.4063.2	37	92.207.7000.0	36	92.208.1063.1	40	92.208.6004.2	40
92.207.4063.3	37	92.207.7000.1	36	92.208.1063.2	40	92.208.6004.3	40
92.207.4063.7	37	92.207.7000.2	36	92.208.1063.3	40	92.208.6060.1	39
92.207.4063.8	37	92.207.7000.3	36	92.208.1064.1	40	92.208.6060.2	39
92.207.4064.0	38	92.207.7000.7	36	92.208.1064.2	40	92.208.6060.3	39
92.207.4064.1	38	92.207.7003.0	37	92.208.1064.3	40	92.208.6063.1	40
92.207.4064.2	38	92.207.7003.1	37	92.208.2000.1	39	92.208.6063.2	40
92.207.4064.3	38	92.207.7003.2	37	92.208.2000.2	39	92.208.6063.3	40
92.207.4064.7	38	92.207.7003.3	37	92.208.2000.3	39	92.208.6064.1	40
92.207.4064.8	38	92.207.7003.7	37	92.208.2003.1	40	92.208.6064.2	40

92.208.6064.3	40	92.232.0364.1	157	92.232.2010.1	18	92.232.4003.2	20
92.208.7000.1	39	92.232.0460.1	156	92.232.2010.2	18	92.232.4003.3	20
92.208.7000.2	39	92.232.0463.1	156	92.232.2010.3	18	92.232.4003.4	20
92.208.7000.3	39	92.232.0464.1	157	92.232.2010.5	18	92.232.4003.5	20
92.208.7003.1	40	92.232.0560.1	156	92.232.2013.1	20	92.232.4004.1	22
92.208.7003.2	40	92.232.0563.1	156	92.232.2013.2	20	92.232.4004.2	22
92.208.7003.3	40	92.232.0564.1	157	92.232.2013.3	20	92.232.4004.3	22
92.208.7004.2	40	92.232.0660.1	156	92.232.2013.5	20	92.232.4004.4	22
92.208.7004.3	40	92.232.0663.1	156	92.232.2014.1	22	92.232.4004.5	22
92.208.7060.1	39	92.232.0664.1	157	92.232.2014.2	22	92.232.4007.1	24
92.208.7060.2	39	92.232.0760.1	156	92.232.2014.3	22	92.232.4007.2	24
92.208.7060.3	39	92.232.0763.1	156	92.232.2014.5	22	92.232.4010.1	18
92.208.7063.1	40	92.232.0764.1	157	92.232.2060.1	19	92.232.4010.2	18
92.208.7063.2	40	92.232.0860.1	156	92.232.2060.2	19	92.232.4010.3	18
92.208.7063.3	40	92.232.0863.1	156	92.232.2060.3	19	92.232.4010.5	18
92.208.7064.1	40	92.232.0864.1	157	92.232.2060.4	19	92.232.4013.1	20
92.208.7064.2	40	92.232.1000.1	18	92.232.2060.5	19	92.232.4013.2	20
92.208.7064.3	40	92.232.1000.2	18	92.232.2063.1	21	92.232.4013.3	20
92.208.8000.1	39	92.232.1000.3	18	92.232.2063.2	21	92.232.4013.5	20
92.208.8000.2	39	92.232.1000.4	18	92.232.2063.3	21	92.232.4014.1	22
92.208.8000.3	39	92.232.1000.5	18	92.232.2063.4	21	92.232.4014.2	22
92.208.8003.1	40	92.232.1003.1	20	92.232.2063.5	21	92.232.4014.3	22
92.208.8003.2	40	92.232.1003.2	20	92.232.2064.1	23	92.232.4014.5	22
92.208.8003.3	40	92.232.1003.3	20	92.232.2064.2	23	92.232.4060.1	19
92.208.8004.1	40	92.232.1003.4	20	92.232.2064.3	23	92.232.4060.2	19
92.208.8004.2	40	92.232.1003.5	20	92.232.2064.4	23	92.232.4060.3	19
92.208.8004.3	40	92.232.1004.1	22	92.232.2064.5	23	92.232.4060.4	19
92.208.8060.1	39	92.232.1004.2	22	92.232.3000.1	18	92.232.4060.5	19
92.208.8060.2	39	92.232.1004.3	22	92.232.3000.2	18	92.232.4063.1	21
92.208.8060.3	39	92.232.1004.4	22	92.232.3000.3	18	92.232.4063.2	21
92.208.8063.1	40	92.232.1004.5	22	92.232.3000.4	18	92.232.4063.3	21
92.208.8063.2	40	92.232.1007.1	24	92.232.3000.5	18	92.232.4063.4	21
92.208.8063.3	40	92.232.1007.2	24	92.232.3003.1	20	92.232.4063.5	21
92.208.8064.1	40	92.232.1010.1	18	92.232.3003.2	20	92.232.4064.1	23
92.208.8064.2	40	92.232.1010.2	18	92.232.3003.3	20	92.232.4064.2	23
92.208.8064.3	40	92.232.1010.3	18	92.232.3003.4	20	92.232.4064.3	23
92.230.1004.1	15	92.232.1010.5	18	92.232.3003.5	20	92.232.4064.4	23
92.230.1004.2	15	92.232.1013.1	20	92.232.3004.1	22	92.232.4064.5	23
92.230.1064.1	15	92.232.1013.2	20	92.232.3004.2	22	92.232.5000.1	18
92.230.1064.2	15	92.232.1013.3	20	92.232.3004.3	22	92.232.5000.2	18
92.230.2004.1	15	92.232.1013.5	20	92.232.3004.4	22	92.232.5000.3	18
92.230.2004.2	15	92.232.1014.1	22	92.232.3004.5	22	92.232.5000.4	18
92.230.2064.1	15	92.232.1014.2	22	92.232.3007.1	24	92.232.5000.5	18
92.230.2064.2	15	92.232.1014.3	22	92.232.3007.2	24	92.232.5003.1	20
92.230.3004.1	15	92.232.1014.5	22	92.232.3007.5	24	92.232.5003.2	20
92.230.3004.2	15	92.232.1060.1	19	92.232.3010.1	18	92.232.5003.3	20
92.230.3064.1	15	92.232.1060.2	19	92.232.3010.2	18	92.232.5003.4	20
92.230.3064.2	15	92.232.1060.3	19	92.232.3010.3	18	92.232.5003.5	20
92.230.4004.1	15	92.232.1060.4	19	92.232.3010.5	18	92.232.5004.1	22
92.230.4004.2	15	92.232.1060.5	19	92.232.3013.1	20	92.232.5004.2	22
92.230.5004.1	15	92.232.1063.1	21	92.232.3013.2	20	92.232.5004.3	22
92.230.5004.2	15	92.232.1063.2	21	92.232.3013.3	20	92.232.5004.4	22
92.230.6004.1	15	92.232.1063.3	21	92.232.3013.5	20	92.232.5004.5	22
92.230.6004.2	15	92.232.1063.4	21	92.232.3014.1	22	92.232.5007.1	24
92.230.7004.1	15	92.232.1063.5	21	92.232.3014.2	22	92.232.5007.2	24
92.230.7004.2	15	92.232.1064.1	23	92.232.3014.3	22	92.232.5010.1	18
92.230.8004.1	15	92.232.1064.2	23	92.232.3014.5	22	92.232.5010.2	18
92.230.8004.2	15	92.232.1064.3	23	92.232.3060.1	19	92.232.5010.3	18
92.231.1004.1	16	92.232.1064.4	23	92.232.3060.2	19	92.232.5010.5	18
92.231.1064.1	16	92.232.1064.5	23	92.232.3060.3	19	92.232.5013.1	20
92.231.1064.2	16	92.232.2000.1	18	92.232.3060.4	19	92.232.5013.2	20
92.231.2004.1	16	92.232.2000.2	18	92.232.3060.5	19	92.232.5013.3	20
92.231.3004.1	16	92.232.2000.3	18	92.232.3063.1	21	92.232.5013.5	20
92.231.3064.1	16	92.232.2000.4	18	92.232.3063.2	21	92.232.5014.1	22
92.231.3064.2	16	92.232.2000.5	18	92.232.3063.3	21	92.232.5014.2	22
92.231.4004.1	16	92.232.2003.1	20	92.232.3063.4	21	92.232.5014.3	22
92.231.5004.1	16	92.232.2003.2	20	92.232.3063.5	21	92.232.5014.5	22
92.231.6004.1	16	92.232.2003.3	20	92.232.3064.1	23	92.232.5060.1	19
92.231.7004.1	16	92.232.2003.4	20	92.232.3064.2	23	92.232.5060.2	19
92.231.8004.1	16	92.232.2003.5	20	92.232.3064.3	23	92.232.5060.3	19
92.232.0160.1	156	92.232.2004.1	22	92.232.3064.4	23	92.232.5060.4	19
92.232.0163.1	156	92.232.2004.2	22	92.232.3064.5	23	92.232.5060.5	19
92.232.0164.1	157	92.232.2004.3	22	92.232.4000.1	18	92.232.5063.1	21
92.232.0260.1	156	92.232.2004.4	22	92.232.4000.2	18	92.232.5063.2	21
92.232.0263.1	156	92.232.2004.5	22	92.232.4000.3	18	92.232.5063.3	21
92.232.0264.1	157	92.232.2007.1	24	92.232.4000.4	18	92.232.5063.4	21
92.232.0360.1	156	92.232.2007.2	24	92.232.4000.5	18	92.232.5063.5	21
92.232.0363.1	156	92.232.2007.5	24	92.232.4003.1	20	92.232.5064.1	23

Part number | page

92.232.5064.2	23	92.232.7060.2	19	92.238.1013.2	27	92.238.3004.5	29
92.232.5064.3	23	92.232.7060.3	19	92.238.1013.3	27	92.238.3010.1	25
92.232.5064.4	23	92.232.7060.4	19	92.238.1013.5	27	92.238.3010.2	25
92.232.5064.5	23	92.232.7060.5	19	92.238.1014.1	29	92.238.3010.3	25
92.232.6000.1	18	92.232.7063.1	21	92.238.1014.2	29	92.238.3010.5	25
92.232.6000.2	18	92.232.7063.2	21	92.238.1014.3	29	92.238.3013.1	27
92.232.6000.3	18	92.232.7063.3	21	92.238.1014.5	29	92.238.3013.2	27
92.232.6000.4	18	92.232.7063.4	21	92.238.1060.1	26	92.238.3013.3	27
92.232.6000.5	18	92.232.7063.5	21	92.238.1060.2	26	92.238.3013.5	27
92.232.6003.1	20	92.232.7064.1	23	92.238.1060.3	26	92.238.3014.1	29
92.232.6003.2	20	92.232.7064.2	23	92.238.1060.4	26	92.238.3014.2	29
92.232.6003.3	20	92.232.7064.3	23	92.238.1060.5	26	92.238.3014.3	29
92.232.6003.4	20	92.232.7064.4	23	92.238.1063.1	28	92.238.3014.5	29
92.232.6003.5	20	92.232.7064.5	23	92.238.1063.2	28	92.238.3060.1	26
92.232.6004.1	22	92.232.8000.1	18	92.238.1063.3	28	92.238.3060.2	26
92.232.6004.2	22	92.232.8000.2	18	92.238.1063.4	28	92.238.3060.3	26
92.232.6004.3	22	92.232.8000.3	18	92.238.1063.5	28	92.238.3060.4	26
92.232.6004.4	22	92.232.8000.4	18	92.238.1064.1	30	92.238.3060.5	26
92.232.6004.5	22	92.232.8000.5	18	92.238.1064.2	30	92.238.3063.1	28
92.232.6007.1	24	92.232.8003.1	20	92.238.1064.3	30	92.238.3063.2	28
92.232.6007.2	24	92.232.8003.2	20	92.238.1064.4	30	92.238.3063.3	28
92.232.6010.1	18	92.232.8003.3	20	92.238.1064.5	30	92.238.3063.4	28
92.232.6010.2	18	92.232.8003.4	20	92.238.2000.1	25	92.238.3063.5	28
92.232.6010.3	18	92.232.8003.5	20	92.238.2000.2	25	92.238.3064.1	30
92.232.6010.5	18	92.232.8004.1	22	92.238.2000.3	25	92.238.3064.2	30
92.232.6013.1	20	92.232.8004.2	22	92.238.2000.4	25	92.238.3064.3	30
92.232.6013.2	20	92.232.8004.3	22	92.238.2000.5	25	92.238.3064.4	30
92.232.6013.3	20	92.232.8004.4	22	92.238.2003.1	27	92.238.3064.5	30
92.232.6013.5	20	92.232.8004.5	22	92.238.2003.2	27	92.238.4000.1	25
92.232.6014.1	22	92.232.8007.1	24	92.238.2003.3	27	92.238.4000.2	25
92.232.6014.2	22	92.232.8007.2	24	92.238.2003.4	27	92.238.4000.3	25
92.232.6014.3	22	92.232.8010.1	18	92.238.2003.5	27	92.238.4000.4	25
92.232.6014.5	22	92.232.8010.2	18	92.238.2004.1	29	92.238.4000.5	25
92.232.6060.1	19	92.232.8010.3	18	92.238.2004.2	29	92.238.4003.1	27
92.232.6060.2	19	92.232.8010.5	18	92.238.2004.3	29	92.238.4003.2	27
92.232.6060.3	19	92.232.8013.1	20	92.238.2004.4	29	92.238.4003.3	27
92.232.6060.4	19	92.232.8013.2	20	92.238.2004.5	29	92.238.4003.4	27
92.232.6060.5	19	92.232.8013.3	20	92.238.2010.1	25	92.238.4003.5	27
92.232.6063.1	21	92.232.8013.5	20	92.238.2010.2	25	92.238.4004.1	29
92.232.6063.2	21	92.232.8014.1	22	92.238.2010.3	25	92.238.4004.2	29
92.232.6063.3	21	92.232.8014.2	22	92.238.2010.5	25	92.238.4004.3	29
92.232.6063.4	21	92.232.8014.3	22	92.238.2013.1	27	92.238.4004.4	29
92.232.6063.5	21	92.232.8014.5	22	92.238.2013.2	27	92.238.4004.5	29
92.232.6064.1	23	92.232.8060.1	19	92.238.2013.3	27	92.238.4010.1	25
92.232.6064.2	23	92.232.8060.2	19	92.238.2013.5	27	92.238.4010.2	25
92.232.6064.3	23	92.232.8060.3	19	92.238.2014.1	29	92.238.4010.3	25
92.232.6064.4	23	92.232.8060.4	19	92.238.2014.2	29	92.238.4010.5	25
92.232.6064.5	23	92.232.8060.5	19	92.238.2014.3	29	92.238.4013.1	27
92.232.7000.1	18	92.232.8063.1	21	92.238.2014.5	29	92.238.4013.2	27
92.232.7000.2	18	92.232.8063.2	21	92.238.2060.1	26	92.238.4013.3	27
92.232.7000.3	18	92.232.8063.3	21	92.238.2060.2	26	92.238.4013.5	27
92.232.7000.4	18	92.232.8063.4	21	92.238.2060.3	26	92.238.4014.1	29
92.232.7000.5	18	92.232.8063.5	21	92.238.2060.4	26	92.238.4014.2	29
92.232.7003.1	20	92.232.8064.1	23	92.238.2060.5	26	92.238.4014.3	29
92.232.7003.2	20	92.232.8064.2	23	92.238.2063.1	28	92.238.4014.5	29
92.232.7003.3	20	92.232.8064.3	23	92.238.2063.2	28	92.238.4060.1	26
92.232.7003.4	20	92.232.8064.4	23	92.238.2063.3	28	92.238.4060.2	26
92.232.7003.5	20	92.232.8064.5	23	92.238.2063.4	28	92.238.4060.3	26
92.232.7004.1	22	92.238.1000.1	25	92.238.2063.5	28	92.238.4060.4	26
92.232.7004.2	22	92.238.1000.2	25	92.238.2064.1	30	92.238.4060.5	26
92.232.7004.3	22	92.238.1000.3	25	92.238.2064.2	30	92.238.4063.1	28
92.232.7004.4	22	92.238.1000.4	25	92.238.2064.3	30	92.238.4063.2	28
92.232.7004.5	22	92.238.1000.5	25	92.238.2064.4	30	92.238.4063.3	28
92.232.7007.1	24	92.238.1003.1	27	92.238.2064.5	30	92.238.4063.4	28
92.232.7007.2	24	92.238.1003.2	27	92.238.3000.1	25	92.238.4063.5	28
92.232.7010.1	18	92.238.1003.3	27	92.238.3000.2	25	92.238.4064.1	30
92.232.7010.2	18	92.238.1003.4	27	92.238.3000.3	25	92.238.4064.2	30
92.232.7010.3	18	92.238.1003.5	27	92.238.3000.4	25	92.238.4064.3	30
92.232.7010.5	18	92.238.1004.1	29	92.238.3000.5	25	92.238.4064.4	30
92.232.7013.1	20	92.238.1004.2	29	92.238.3003.1	27	92.238.4064.5	30
92.232.7013.2	20	92.238.1004.3	29	92.238.3003.2	27	92.238.5000.1	25
92.232.7013.3	20	92.238.1004.4	29	92.238.3003.3	27	92.238.5000.2	25
92.232.7013.5	20	92.238.1004.5	29	92.238.3003.4	27	92.238.5000.3	25
92.232.7014.1	22	92.238.1010.1	25	92.238.3003.5	27	92.238.5000.4	25
92.232.7014.2	22	92.238.1010.2	25	92.238.3004.1	29	92.238.5000.5	25
92.232.7014.3	22	92.238.1010.3	25	92.238.3004.2	29	92.238.5003.1	27
92.232.7014.5	22	92.238.1010.5	25	92.238.3004.3	29	92.238.5003.2	27
92.232.7060.1	19	92.238.1013.1	27	92.238.3004.4	29	92.238.5003.3	27

92.238.5003.4	27	92.238.7000.3	25	92.238.8064.2	30	92.257.2063.8	51
92.238.5003.5	27	92.238.7000.4	25	92.238.8064.3	30	92.257.2063.9	51
92.238.5004.1	29	92.238.7000.5	25	92.238.8064.4	30	92.257.2064.0	52
92.238.5004.2	29	92.238.7003.1	27	92.238.8064.5	30	92.257.2064.1	52
92.238.5004.3	29	92.238.7003.2	27	92.255.1064.2	48	92.257.2064.2	52
92.238.5004.4	29	92.238.7003.3	27	92.255.2064.2	48	92.257.2064.7	52
92.238.5004.5	29	92.238.7003.4	27	92.255.3064.2	48	92.257.2064.8	52
92.238.5010.1	25	92.238.7003.5	27	92.255.4064.2	48	92.257.2064.9	52
92.238.5010.2	25	92.238.7004.1	29	92.255.5064.2	48	92.257.3000.0	50
92.238.5010.3	25	92.238.7004.2	29	92.255.6064.2	48	92.257.3000.1	50
92.238.5010.5	25	92.238.7004.3	29	92.255.7064.2	48	92.257.3000.2	50
92.238.5013.1	27	92.238.7004.4	29	92.255.8064.2	48	92.257.3000.7	50
92.238.5013.2	27	92.238.7004.5	29	92.256.1064.2	49	92.257.3000.9	50
92.238.5013.3	27	92.238.7010.1	25	92.256.2064.2	49	92.257.3003.0	51
92.238.5013.5	27	92.238.7010.2	25	92.256.3064.2	49	92.257.3003.1	51
92.238.5014.1	29	92.238.7010.3	25	92.256.4064.2	49	92.257.3003.2	51
92.238.5014.2	29	92.238.7010.5	25	92.256.5064.2	49	92.257.3003.7	51
92.238.5014.3	29	92.238.7013.1	27	92.256.6064.2	49	92.257.3003.9	51
92.238.5014.5	29	92.238.7013.2	27	92.256.7064.2	49	92.257.3004.0	52
92.238.5060.1	26	92.238.7013.3	27	92.256.8064.2	49	92.257.3004.1	52
92.238.5060.2	26	92.238.7013.5	27	92.257.1000.0	50	92.257.3004.2	52
92.238.5060.3	26	92.238.7014.1	29	92.257.1000.1	50	92.257.3004.7	52
92.238.5060.4	26	92.238.7014.2	29	92.257.1000.2	50	92.257.3004.9	52
92.238.5060.5	26	92.238.7014.3	29	92.257.1000.7	50	92.257.3010.1	50
92.238.5063.1	28	92.238.7014.5	29	92.257.1000.9	50	92.257.3014.1	52
92.238.5063.2	28	92.238.7060.1	26	92.257.1003.0	51	92.257.3060.0	50
92.238.5063.3	28	92.238.7060.2	26	92.257.1003.1	51	92.257.3060.1	50
92.238.5063.4	28	92.238.7060.3	26	92.257.1003.2	51	92.257.3060.2	50
92.238.5063.5	28	92.238.7060.4	26	92.257.1003.7	51	92.257.3060.8	50
92.238.5064.1	30	92.238.7060.5	26	92.257.1003.9	51	92.257.3060.9	50
92.238.5064.2	30	92.238.7063.1	28	92.257.1004.0	52	92.257.3063.0	51
92.238.5064.3	30	92.238.7063.2	28	92.257.1004.1	52	92.257.3063.1	51
92.238.5064.4	30	92.238.7063.3	28	92.257.1004.2	52	92.257.3063.2	51
92.238.5064.5	30	92.238.7063.4	28	92.257.1004.7	52	92.257.3063.7	51
92.238.6000.1	25	92.238.7063.5	28	92.257.1004.9	52	92.257.3063.8	51
92.238.6000.2	25	92.238.7064.1	30	92.257.1060.0	50	92.257.3063.9	51
92.238.6000.3	25	92.238.7064.2	30	92.257.1060.1	50	92.257.3064.0	52
92.238.6000.4	25	92.238.7064.3	30	92.257.1060.2	50	92.257.3064.1	52
92.238.6000.5	25	92.238.7064.4	30	92.257.1060.8	50	92.257.3064.2	52
92.238.6003.1	27	92.238.7064.5	30	92.257.1060.9	50	92.257.3064.7	52
92.238.6003.2	27	92.238.8000.1	25	92.257.1063.0	51	92.257.3064.8	52
92.238.6003.3	27	92.238.8000.2	25	92.257.1063.1	51	92.257.3064.9	52
92.238.6003.4	27	92.238.8000.3	25	92.257.1063.2	51	92.257.4000.0	50
92.238.6003.5	27	92.238.8000.4	25	92.257.1063.7	51	92.257.4000.1	50
92.238.6004.1	29	92.238.8000.5	25	92.257.1063.8	51	92.257.4000.2	50
92.238.6004.2	29	92.238.8003.1	27	92.257.1063.9	51	92.257.4000.7	50
92.238.6004.3	29	92.238.8003.2	27	92.257.1064.0	52	92.257.4000.9	50
92.238.6004.4	29	92.238.8003.3	27	92.257.1064.1	52	92.257.4003.0	51
92.238.6004.5	29	92.238.8003.4	27	92.257.1064.2	52	92.257.4003.1	51
92.238.6010.1	25	92.238.8003.5	27	92.257.1064.7	52	92.257.4003.2	51
92.238.6010.2	25	92.238.8004.1	29	92.257.1064.8	52	92.257.4003.7	51
92.238.6010.3	25	92.238.8004.2	29	92.257.1064.9	52	92.257.4003.9	51
92.238.6010.5	25	92.238.8004.3	29	92.257.2000.0	50	92.257.4004.0	52
92.238.6013.1	27	92.238.8004.4	29	92.257.2000.1	50	92.257.4004.1	52
92.238.6013.2	27	92.238.8004.5	29	92.257.2000.2	50	92.257.4004.2	52
92.238.6013.3	27	92.238.8010.1	25	92.257.2000.7	50	92.257.4004.7	52
92.238.6013.5	27	92.238.8010.2	25	92.257.2000.9	50	92.257.4004.9	52
92.238.6014.1	29	92.238.8010.3	25	92.257.2003.0	51	92.257.4010.1	50
92.238.6014.2	29	92.238.8010.5	25	92.257.2003.1	51	92.257.4014.1	52
92.238.6014.3	29	92.238.8013.1	27	92.257.2003.2	51	92.257.4060.0	50
92.238.6014.5	29	92.238.8013.2	27	92.257.2003.7	51	92.257.4060.1	50
92.238.6060.1	26	92.238.8013.3	27	92.257.2003.9	51	92.257.4060.2	50
92.238.6060.2	26	92.238.8013.5	27	92.257.2004.0	52	92.257.4060.8	50
92.238.6060.3	26	92.238.8014.1	29	92.257.2004.1	52	92.257.4060.9	50
92.238.6060.4	26	92.238.8014.2	29	92.257.2004.2	52	92.257.4063.0	51
92.238.6060.5	26	92.238.8014.3	29	92.257.2004.7	52	92.257.4063.1	51
92.238.6063.1	28	92.238.8014.5	29	92.257.2004.9	52	92.257.4063.2	51
92.238.6063.2	28	92.238.8060.1	26	92.257.2010.1	50	92.257.4063.7	51
92.238.6063.3	28	92.238.8060.2	26	92.257.2014.1	52	92.257.4063.8	51
92.238.6063.4	28	92.238.8060.3	26	92.257.2060.0	50	92.257.4063.9	51
92.238.6063.5	28	92.238.8060.4	26	92.257.2060.1	50	92.257.4064.0	52
92.238.6064.1	30	92.238.8060.5	26	92.257.2060.2	50	92.257.4064.1	52
92.238.6064.2	30	92.238.8063.1	28	92.257.2060.8	50	92.257.4064.2	52
92.238.6064.3	30	92.238.8063.2	28	92.257.2060.9	50	92.257.4064.7	52
92.238.6064.4	30	92.238.8063.3	28	92.257.2063.0	51	92.257.4064.8	52
92.238.6064.5	30	92.238.8063.4	28	92.257.2063.1	51	92.257.4064.9	52
92.238.7000.1	25	92.238.8063.5	28	92.257.2063.2	51	92.257.5000.0	50
92.238.7000.2	25	92.238.8064.1	30	92.257.2063.7	51	92.257.5000.1	50

Part number | page

92.257.5000.2	50	92.257.7004.9	52	92.258.6063.1	54	92.258.2060.2	53
92.257.5000.7	50	92.257.7060.0	50	92.258.6063.2	54	92.258.2060.3	53
92.257.5000.9	50	92.257.7060.1	50	92.258.6063.9	54	92.258.2060.9	53
92.257.5003.0	51	92.257.7060.2	50	92.258.6064.1	54	92.258.2063.1	54
92.257.5003.1	51	92.257.7060.8	50	92.258.6064.2	54	92.258.2063.2	54
92.257.5003.2	51	92.257.7060.9	50	92.258.6064.9	54	92.258.2063.9	54
92.257.5003.7	51	92.257.7063.0	51	92.258.7000.1	53	92.258.2064.1	54
92.257.5003.9	51	92.257.7063.1	51	92.258.7000.2	53	92.258.2064.2	54
92.257.5004.0	52	92.257.7063.2	51	92.258.7000.9	53	92.258.2064.9	54
92.257.5004.1	52	92.257.7063.7	51	92.258.7003.1	54	92.258.3000.1	53
92.257.5004.2	52	92.257.7063.8	51	92.258.7003.2	54	92.258.3000.2	53
92.257.5004.7	52	92.257.7063.9	51	92.258.7003.9	54	92.258.3000.9	53
92.257.5004.9	52	92.257.7064.0	52	92.258.7004.1	54	92.258.3003.1	54
92.257.5010.1	50	92.257.7064.1	52	92.258.7004.2	54	92.258.3003.2	54
92.257.5014.1	52	92.257.7064.2	52	92.258.7004.9	54	92.258.3003.9	54
92.257.5060.0	50	92.257.7064.7	52	92.258.7060.1	53	92.258.3004.1	54
92.257.5060.1	50	92.257.7064.8	52	92.258.7060.2	53	92.258.3004.2	54
92.257.5060.2	50	92.257.7064.9	52	92.258.7060.9	53	92.258.3004.9	54
92.257.5060.8	50	92.257.8000.0	50	92.258.7063.1	54	92.258.3060.1	53
92.257.5060.9	50	92.257.8000.1	50	92.258.7063.2	54	92.258.3060.2	53
92.257.5063.0	51	92.257.8000.2	50	92.258.7063.9	54	92.258.3060.3	53
92.257.5063.1	51	92.257.8000.7	50	92.258.7064.1	54	92.258.3060.9	53
92.257.5063.2	51	92.257.8000.9	50	92.258.7064.2	54	92.258.3063.1	54
92.257.5063.7	51	92.257.8003.0	51	92.258.7064.9	54	92.258.3063.2	54
92.257.5063.8	51	92.257.8003.1	51	92.258.8000.1	53	92.258.3063.9	54
92.257.5063.9	51	92.257.8003.2	51	92.258.8000.2	53	92.258.3064.1	54
92.257.5064.0	52	92.257.8003.7	51	92.258.8000.9	53	92.258.3064.2	54
92.257.5064.1	52	92.257.8003.9	51	92.258.8003.1	54	92.258.3064.9	54
92.257.5064.2	52	92.257.8004.0	52	92.258.8003.2	54	92.258.4000.1	53
92.257.5064.7	52	92.257.8004.1	52	92.258.8003.9	54	92.258.4000.2	53
92.257.5064.8	52	92.257.8004.2	52	92.258.8004.1	54	92.258.4000.9	53
92.257.5064.9	52	92.257.8004.7	52	92.258.8004.2	54	92.258.4003.1	54
92.257.6000.0	50	92.257.8004.9	52	92.258.8004.9	54	92.258.4003.2	54
92.257.6000.1	50	92.257.8060.0	50	92.258.8060.1	53	92.258.4003.9	54
92.257.6000.2	50	92.257.8060.1	50	92.258.8060.2	53	92.258.4004.1	54
92.257.6000.7	50	92.257.8060.2	50	92.258.8060.3	53	92.258.4004.2	54
92.257.6000.9	50	92.257.8060.8	50	92.258.8060.9	53	92.258.4004.9	54
92.257.6003.0	51	92.257.8060.9	50	92.258.8063.1	54	92.258.4060.1	53
92.257.6003.1	51	92.257.8063.0	51	92.258.8063.2	54	92.258.4060.2	53
92.257.6003.2	51	92.257.8063.1	51	92.258.8063.9	54	92.258.4060.3	53
92.257.6003.7	51	92.257.8063.2	51	92.258.8064.1	54	92.258.4060.9	53
92.257.6003.9	51	92.257.8063.7	51	92.258.8064.2	54	92.258.4063.1	54
92.257.6004.0	52	92.257.8063.8	51	92.258.8064.9	54	92.258.4063.2	54
92.257.6004.1	52	92.257.8063.9	51	92.297.1000.0	18	92.258.4063.9	54
92.257.6004.2	52	92.257.8064.0	52	92.297.1000.7	18	92.258.4064.1	54
92.257.6004.7	52	92.257.8064.1	52	92.297.1003.0	20	92.258.4064.2	54
92.257.6004.9	52	92.257.8064.2	52	92.297.1003.7	20	92.258.4064.9	54
92.257.6060.0	50	92.257.8064.7	52	92.297.1004.0	22	92.258.5000.1	53
92.257.6060.1	50	92.257.8064.8	52	92.297.1004.7	22	92.258.5000.2	53
92.257.6060.2	50	92.257.8064.9	52	92.297.1060.0	19	92.258.5000.9	53
92.257.6060.8	50	92.258.1000.1	53	92.297.1060.7	19	92.258.5003.1	54
92.257.6060.9	50	92.258.1000.2	53	92.297.1063.0	21	92.258.5003.2	54
92.257.6063.0	51	92.258.1000.9	53	92.297.1063.7	21	92.258.5003.9	54
92.257.6063.1	51	92.258.1003.1	54	92.297.1064.0	23	92.258.5004.1	54
92.257.6063.2	51	92.258.1003.2	54	92.297.1064.7	23	92.258.5004.2	54
92.257.6063.7	51	92.258.1003.9	54	92.297.2000.0	18	92.258.5004.9	54
92.257.6063.8	51	92.258.1004.1	54	92.297.2000.7	18	92.258.5060.1	53
92.257.6063.9	51	92.258.1004.2	54	92.297.2003.0	20	92.258.5060.2	53
92.257.6064.0	52	92.258.1004.9	54	92.297.2003.7	20	92.258.5060.9	53
92.257.6064.1	52	92.258.1060.1	53	92.297.2004.0	22	92.258.5063.1	54
92.257.6064.2	52	92.258.1060.2	53	92.297.2004.7	22	92.258.5063.2	54
92.257.6064.7	52	92.258.1060.9	53	92.297.2060.0	19	92.258.5063.9	54
92.257.6064.8	52	92.258.1063.1	54	92.297.2060.7	19	92.258.5064.1	54
92.257.6064.9	52	92.258.1063.2	54	92.297.2063.0	21	92.258.5064.2	54
92.257.7000.0	50	92.258.1063.9	54	92.297.2063.7	21	92.258.5064.9	54
92.257.7000.1	50	92.258.1064.1	54	92.297.2064.0	23	92.258.6000.1	53
92.257.7000.2	50	92.258.1064.2	54	92.297.2064.7	23	92.258.6000.2	53
92.257.7000.7	50	92.258.1064.9	54	92.297.3000.0	18	92.258.6000.9	53
92.257.7000.9	50	92.258.2000.1	53	92.297.3000.7	18	92.258.6003.1	54
92.257.7003.0	51	92.258.2000.2	53	92.297.3003.0	20	92.258.6003.2	54
92.257.7003.1	51	92.258.2000.9	53	92.297.3003.7	20	92.258.6003.9	54
92.257.7003.2	51	92.258.2003.1	54	92.297.3004.0	22	92.258.6004.1	54
92.257.7003.7	51	92.258.2003.2	54	92.297.3004.7	22	92.258.6004.2	54
92.257.7003.9	51	92.258.2003.9	54	92.297.3060.0	19	92.258.6004.9	54
92.257.7004.0	52	92.258.2004.1	54	92.297.3060.7	19	92.258.6060.1	53
92.257.7004.1	52	92.258.2004.2	54	92.297.3063.0	21	92.258.6060.2	53
92.257.7004.2	52	92.258.2004.9	54	92.297.3063.7	21	92.258.6060.3	53
92.257.7004.7	52	92.258.2060.1	53	92.297.3064.0	23	92.258.6060.9	53

92.297.3064.7	23	92.298.6063.7	28	92.944.3053.0	32	93.432.2553.0	130
92.297.4000.0	18	92.298.6064.7	30	92.944.3053.1	32	93.432.2553.1	130
92.297.4000.7	18	92.298.7060.7	26	92.944.3057.0	70	93.432.2653.0	131
92.297.4003.0	20	92.298.7063.7	28	92.944.3253.0	32	93.432.2653.1	131
92.297.4003.7	20	92.298.7064.7	30	92.944.3353.0	32	93.572.0053.0	136
92.297.4004.0	22	92.298.8060.7	26	92.944.3553.0	32	93.572.0153.0	136
92.297.4004.7	22	92.298.8063.7	28	92.944.3553.5	32	93.574.0053.0	136
92.297.4060.0	19	92.298.8064.7	30	92.953.4053.0	42	93.574.0153.0	136
92.297.4060.7	19	92.731.6053.0	14	92.953.4053.1	42	94.425.1000.7	125
92.297.4063.0	21	92.931.3053.0	6	92.953.4057.0	70	94.425.1000.9	125
92.297.4063.7	21	92.931.3053.1	6	92.953.4153.0	42	94.425.1003.7	126
92.297.4064.0	23	92.931.3057.0	70	92.953.4253.0	42	94.425.1003.9	126
92.297.4064.7	23	92.931.3453.0	6	92.953.4353.0	42	94.425.1004.7	128
92.297.5000.0	18	92.931.3453.5	6	92.953.4453.0	42	94.425.1004.9	128
92.297.5000.7	18	92.931.3553.0	6	92.953.4553.0	42	94.425.1030.9	125
92.297.5003.0	20	92.931.3653.0	6	92.953.4553.5	42	94.425.1033.9	126
92.297.5003.7	20	92.931.3753.0	6	92.953.5053.0	42	94.425.1034.9	128
92.297.5004.0	22	92.931.3853.0	6	92.953.5053.1	42	94.425.1060.7	125
92.297.5004.7	22	92.931.4053.0	6	92.953.5153.0	42	94.425.1063.7	126
92.297.5060.0	19	92.931.5053.0	6	92.953.5253.0	42	94.425.1064.7	128
92.297.5060.7	19	92.931.5053.1	6	92.953.5353.0	42	94.425.1090.9	125
92.297.5063.0	21	92.931.5353.0	6	92.953.5453.0	42	94.425.1093.9	127
92.297.5063.7	21	92.931.5353.5	6	92.953.5553.0	42	94.425.1094.9	129
92.297.5064.0	23	92.931.5553.0	6	92.953.5553.5	42	94.425.2000.7	125
92.297.5064.7	23	92.931.5853.0	6	92.954.4053.0	42	94.425.2000.9	125
92.297.6000.0	18	92.931.6053.0	6	92.954.4053.1	42	94.425.2003.7	126
92.297.6000.7	18	92.932.3053.0	6	92.954.4057.0	70	94.425.2003.9	126
92.297.6003.0	20	92.932.3053.1	6	92.954.4153.0	42	94.425.2004.7	128
92.297.6003.7	20	92.932.3057.0	70	92.954.4253.0	42	94.425.2004.9	128
92.297.6004.0	22	92.932.3453.0	6	92.954.4353.0	42	94.425.2030.9	125
92.297.6004.7	22	92.932.3453.5	6	92.954.4453.0	42	94.425.2033.9	126
92.297.6060.0	19	92.932.3553.0	6	92.954.4553.0	42	94.425.2034.9	128
92.297.6060.7	19	92.932.3653.0	6	92.954.4553.5	42	94.425.2060.7	125
92.297.6063.0	21	92.932.3753.0	6	92.954.5053.0	42	94.425.2063.7	126
92.297.6063.7	21	92.932.3853.0	6	92.954.5053.1	42	94.425.2064.7	128
92.297.6064.0	23	92.932.4053.0	6	92.954.5153.0	42	94.425.2090.9	125
92.297.6064.7	23	92.932.5053.0	6	92.954.5253.0	42	94.425.2093.9	127
92.297.7000.0	18	92.932.5053.1	6	92.954.5353.0	42	94.425.2094.9	129
92.297.7000.7	18	92.932.5353.0	6	92.954.5453.0	42	94.425.3000.7	125
92.297.7003.0	20	92.932.5353.5	6	92.954.5553.0	42	94.425.3000.9	125
92.297.7003.7	20	92.932.5553.0	6	92.954.5553.5	42	94.425.3003.7	126
92.297.7004.0	22	92.932.5853.0	6	92.968.0158.1	56	94.425.3003.9	126
92.297.7004.7	22	92.932.6053.0	6	92.968.0358.1	56	94.425.3004.7	128
92.297.7060.0	19	92.933.0053.0	7	92.969.0158.1	56	94.425.3004.9	128
92.297.7060.7	19	92.933.0053.1	7	92.969.0358.1	56	94.425.3030.9	125
92.297.7063.0	21	92.933.0153.0	7	93.420.0053.0	124	94.425.3033.9	126
92.297.7063.7	21	92.933.0153.5	7	93.420.0453.0	124	94.425.3034.9	128
92.297.7064.0	23	92.933.0453.0	7	93.420.0653.0	124	94.425.3060.7	125
92.297.7064.7	23	92.933.0553.0	7	93.420.4553.0	124	94.425.3060.9	125
92.297.8000.0	18	92.933.0653.0	7	93.420.4653.0	124	94.425.3063.7	126
92.297.8000.7	18	92.933.0753.0	7	93.420.5453.0	141	94.425.3063.9	126
92.297.8003.0	20	92.934.0053.0	7	93.421.0353.1	123	94.425.3064.7	128
92.297.8003.7	20	92.934.0053.1	7	93.421.0553.1	122	94.425.3090.9	125
92.297.8004.0	22	92.934.0153.0	7	93.421.0653.1	123	94.425.3093.9	127
92.297.8004.7	22	92.934.0153.5	7	93.421.4353.1	123	94.425.3094.9	129
92.297.8060.0	19	92.934.0453.0	7	93.421.4553.1	122	94.425.4000.7	125
92.297.8060.7	19	92.934.0553.0	7	93.421.4653.1	123	94.425.4000.9	125
92.297.8063.0	21	92.934.0653.0	7	93.421.5453.0	141	94.425.4003.7	126
92.297.8063.7	21	92.934.0753.0	7	93.422.0353.1	123	94.425.4003.9	126
92.297.8064.0	23	92.943.0053.0	32	93.422.0553.1	122	94.425.4004.7	128
92.297.8064.7	23	92.943.0053.1	32	93.422.0653.1	123	94.425.4004.9	128
92.298.1060.7	26	92.943.0153.0	32	93.422.4353.1	123	94.425.4030.9	125
92.298.1063.7	28	92.943.0153.5	32	93.422.4553.1	122	94.425.4033.9	126
92.298.1064.7	30	92.943.0353.0	32	93.422.4653.1	123	94.425.4034.9	128
92.298.2060.7	26	92.943.0453.0	32	93.430.2053.0	132	94.425.4060.7	125
92.298.2063.7	28	92.943.3053.0	32	93.430.2053.1	132	94.425.4063.7	126
92.298.2064.7	30	92.943.3053.1	32	93.430.2453.0	132	94.425.4064.7	128
92.298.3060.7	26	92.943.3057.0	70	93.430.2453.1	132	94.425.4090.9	125
92.298.3063.7	28	92.943.3253.0	32	93.430.2653.0	132	94.425.4094.9	129
92.298.3064.7	30	92.943.3353.0	32	93.430.2653.1	132	94.425.5000.7	125
92.298.4060.0	26	92.943.3553.0	32	93.431.2353.0	131	94.425.5000.9	125
92.298.4060.7	26	92.943.3553.5	32	93.431.2353.1	131	94.425.5003.7	126
92.298.4063.7	28	92.944.0053.0	32	93.431.2553.0	130	94.425.5003.9	126
92.298.4064.7	30	92.944.0053.1	32	93.431.2553.1	130	94.425.5004.7	128
92.298.5060.7	26	92.944.0153.0	32	93.431.2653.0	131	94.425.5004.9	128
92.298.5063.7	28	92.944.0153.5	32	93.431.2653.1	131	94.425.5030.9	125
92.298.5064.7	30	92.944.0353.0	32	93.432.2353.0	131	94.425.5033.9	126
92.298.6060.7	26	92.944.0453.0	32	93.432.2353.1	131	94.425.5034.9	128

Part number | page

94.425.5060.7	125	94.435.7060.1	133	G1.044.0203.1	165	G1.344.0602.2	163
94.425.5060.9	125	94.435.8000.1	133	G1.044.0203.2	165	G1.344.0603.1	165
94.425.5063.7	126	94.435.8004.1	134	G1.044.0302.1	163	G1.344.0603.2	165
94.425.5064.7	128	94.435.8060.1	133	G1.044.0302.2	163	G1.344.0702.1	163
94.425.5090.9	125	94.435.8064.1	134	G1.044.0303.1	165	G1.344.0702.2	163
94.425.5093.9	127	95.101.2400.0	136	G1.044.0303.2	165	G1.344.0703.1	165
94.425.5094.9	129	95.300.0600.0	143	G1.044.0402.1	163	G1.344.0703.2	165
94.425.6000.7	125	99.004.8210.0	62	G1.044.0402.2	163	G1.344.0802.1	163
94.425.6000.9	125	99.005.8210.0	62	G1.044.0403.1	165	G1.344.0802.2	163
94.425.6003.7	126	99.188.0028.0	66	G1.044.0403.2	165	G1.344.0803.1	165
94.425.6003.9	126	99.202.0028.0	66	G1.044.0502.1	163	G1.344.0803.2	165
94.425.6004.7	128	99.234.0028.0	65	G1.044.0502.2	163	G1.355.0102.1	169
94.425.6030.9	125	99.237.0028.0	66	G1.044.0503.1	165	G1.355.0102.7	169
94.425.6033.9	126	99.238.0028.0	65	G1.044.0503.2	165	G1.355.0202.1	169
94.425.6034.9	128	99.281.0028.0	66	G1.044.0602.1	163	G1.355.0202.7	169
94.425.6060.7	125	99.293.0028.0	65	G1.044.0602.2	163	G1.355.0302.1	169
94.425.6063.7	126	99.294.0028.0	67	G1.044.0603.1	165	G1.355.0302.7	169
94.425.6064.7	128	99.297.0028.0	65	G1.044.0603.2	165	G1.355.0402.1	169
94.425.6090.9	125	99.308.0028.0	67	G1.044.0702.1	163	G1.355.0402.7	169
94.425.6093.9	127	99.400.5623.1	17	G1.044.0702.2	163	G1.355.0502.1	169
94.425.6094.9	129	99.411.0028.0	58	G1.044.0703.1	165	G1.355.0502.7	169
94.425.7000.7	125	99.412.0028.0	58	G1.044.0703.2	165	G1.355.0702.1	169
94.425.7000.9	125	99.413.0000.8	111	G1.044.0802.1	163	G1.355.0702.7	169
94.425.7003.7	126	99.413.0028.0	58	G1.044.0802.2	163	G1.355.1002.1	169
94.425.7003.9	126	99.414.0028.0	58	G1.044.0803.1	165	G1.355.1002.7	169
94.425.7004.7	128	99.415.0000.8	114	G1.044.0803.2	165	G1.366.0202.7	174
94.425.7030.9	125	99.415.0028.0	58	G1.055.0102.1	169	G1.366.0302.7	174
94.425.7034.9	128	99.416.0028.0	58	G1.055.0102.7	169	G1.366.0402.7	174
94.425.7060.7	125	99.417.0028.0	58	G1.055.0202.1	169	G1.366.0502.7	174
94.425.7064.7	128	99.418.0028.0	58	G1.055.0202.7	169	G1.366.0602.7	174
94.425.7090.9	125	99.418.9999.8	142	G1.055.0302.1	169	G1.366.0702.7	174
94.425.7093.9	127	99.419.0000.8	111	G1.055.0302.7	169	G1.366.1002.7	174
94.425.7094.9	129	99.420.5772.2	46	G1.055.0402.1	169	G1.444.0102.1	164
94.425.8000.7	125	99.421.5772.2	46	G1.055.0402.7	169	G1.444.0102.2	164
94.425.8000.9	125	99.422.5772.2	46	G1.055.0502.1	169	G1.444.0103.1	166
94.425.8003.7	126	99.424.9910.0	152	G1.055.0502.7	169	G1.444.0103.2	166
94.425.8003.9	126	99.427.0000.0	106	G1.055.0702.1	169	G1.444.0202.1	164
94.425.8004.7	128	99.428.0000.8	115	G1.055.0702.7	169	G1.444.0202.2	164
94.425.8030.9	125	99.431.0028.0	59	G1.055.1002.1	169	G1.444.0203.1	166
94.425.8033.9	126	99.432.0028.0	59	G1.055.1002.7	169	G1.444.0203.2	166
94.425.8034.9	128	99.433.0028.0	59	G1.066.0202.7	174	G1.444.0302.1	164
94.425.8060.7	125	99.434.0028.0	59	G1.066.0302.7	174	G1.444.0302.2	164
94.425.8063.7	126	99.435.0028.0	59	G1.066.0402.7	174	G1.444.0303.1	166
94.425.8064.7	128	99.436.0028.0	59	G1.066.0502.7	174	G1.444.0303.2	166
94.425.8090.9	125	99.437.0028.0	59	G1.066.0602.7	174	G1.444.0402.1	164
94.425.8093.9	127	99.438.0028.0	59	G1.066.0702.7	174	G1.444.0402.2	164
94.425.8094.9	129	99.450.0000.8	111	G1.066.1002.7	174	G1.444.0403.1	166
94.435.1000.1	133	99.451.0000.8	116	G1.130.3813.1	155	G1.444.0403.2	166
94.435.1003.1	134	99.451.0028.0	59	G1.130.3823.1	155	G1.444.0502.1	164
94.435.1004.1	134	99.452.0028.0	59	G1.131.1370.1	155	G1.444.0502.2	164
94.435.1060.1	133	99.452.9910.0	14	G1.132.4403.1	155	G1.444.0503.1	166
94.435.1064.1	134	99.453.0028.0	59	G1.140.4813.1	162	G1.444.0503.2	166
94.435.2000.1	133	99.453.9910.0	35	G1.140.4813.1	162	G1.444.0602.1	164
94.435.2003.1	134	99.454.0028.0	59	G1.141.1300.1	162	G1.444.0602.2	164
94.435.2004.1	134	99.455.0028.0	59	G1.142.4403.1	162	G1.444.0603.1	166
94.435.2060.1	133	99.456.0028.0	59	G1.162.6603.1	173	G1.444.0603.2	166
94.435.2064.1	134	99.457.0028.0	59	G1.162.6603.7	173	G1.444.0702.1	164
94.435.3000.1	133	99.458.0028.0	59	G1.344.0102.1	163	G1.444.0702.2	164
94.435.3003.1	134	99.470.5772.2	46	G1.344.0102.2	163	G1.444.0703.1	166
94.435.3004.1	134	99.491.0000.0	106	G1.344.0103.1	165	G1.444.0703.2	166
94.435.3060.1	133	99.500.0028.0	64	G1.344.0103.2	165	G1.444.0802.1	164
94.435.3064.1	134	99.501.0028.0	64	G1.344.0202.1	163	G1.444.0802.2	164
94.435.4000.1	133	99.502.0028.0	64	G1.344.0202.2	163	G1.444.0803.1	166
94.435.4003.1	134	99.508.0028.0	64	G1.344.0203.1	165	G1.444.0803.2	166
94.435.4004.1	134	99.600.0000.0	68	G1.344.0203.2	165	G1.455.0102.1	170
94.435.4060.1	133	99.600.0028.0	63	G1.344.0302.1	163	G1.455.0102.7	170
94.435.4064.1	134	99.601.0028.0	63	G1.344.0302.2	163	G1.455.0202.1	170
94.435.5000.1	133	99.602.0028.0	63	G1.344.0303.1	165	G1.455.0202.7	170
94.435.5003.1	134	99.612.0028.0	63	G1.344.0303.2	165	G1.455.0302.1	170
94.435.5004.1	134	99.652.0028.0	63	G1.344.0402.1	163	G1.455.0302.7	170
94.435.5060.1	133	99.653.0028.0	63	G1.344.0402.2	163	G1.455.0402.1	170
94.435.6000.1	133	G0.000.0044.7	145	G1.344.0403.1	165	G1.455.0402.7	170
94.435.6003.1	134	G1.044.0102.1	163	G1.344.0403.2	165	G1.455.0502.1	170
94.435.6004.1	134	G1.044.0102.2	163	G1.344.0502.1	163	G1.455.0502.7	170
94.435.6060.1	133	G1.044.0103.1	165	G1.344.0502.2	163	G1.455.0702.1	170
94.435.6064.1	134	G1.044.0103.2	165	G1.344.0503.1	165	G1.455.0702.7	170
94.435.7000.1	133	G1.044.0202.1	163	G1.344.0503.2	165	G1.455.1002.1	170
94.435.7004.1	134	G1.044.0202.2	163	G1.344.0602.1	163	G1.455.1002.7	170

G1.466.0202.7	175	G2.232.4060.1	19	G2.238.1064.1	30	G2.238.7060.2	26
G1.466.0302.7	175	G2.232.4060.1	182	G2.238.1064.1	187	G2.238.7060.2	185
G1.466.0402.7	175	G2.232.4060.2	19	G2.238.1064.2	30	G2.238.7060.7	185
G1.466.0502.7	175	G2.232.4060.2	182	G2.238.1064.2	187	G2.238.7063.1	28
G1.466.0602.7	175	G2.232.4060.7	182	G2.238.1064.7	187	G2.238.7063.1	186
G1.466.0702.7	175	G2.232.4063.1	21	G2.238.2060.1	26	G2.238.7063.2	28
G1.466.1002.7	175	G2.232.4063.1	183	G2.238.2060.1	185	G2.238.7063.2	186
G1.830.0012.1	154	G2.232.4063.2	21	G2.238.2060.2	26	G2.238.7063.7	186
G1.830.0042.1	154	G2.232.4063.2	183	G2.238.2060.2	185	G2.238.7064.1	30
G1.830.0062.1	154	G2.232.4063.7	183	G2.238.2060.7	185	G2.238.7064.1	187
G1.833.0412.1	153	G2.232.4064.1	23	G2.238.2063.1	28	G2.238.7064.2	30
G1.834.0442.1	153	G2.232.4064.1	184	G2.238.2063.1	186	G2.238.7064.2	187
G1.840.0012.1	161	G2.232.4064.2	23	G2.238.2063.2	28	G2.238.7064.7	187
G1.840.0042.1	161	G2.232.4064.2	184	G2.238.2063.2	186	G2.238.8060.1	26
G1.840.0062.1	161	G2.232.4064.7	184	G2.238.2063.7	186	G2.238.8060.1	185
G1.843.0412.1	159	G2.232.5060.1	19	G2.238.2064.1	30	G2.238.8060.2	26
G1.843.0422.1	159	G2.232.5060.1	182	G2.238.2064.1	187	G2.238.8060.2	185
G1.844.0442.1	159	G2.232.5060.2	19	G2.238.2064.2	30	G2.238.8060.7	185
G1.845.0432.2	160	G2.232.5060.2	182	G2.238.2064.2	187	G2.238.8063.1	28
G1.845.0472.2	160	G2.232.5060.7	182	G2.238.2064.7	187	G2.238.8063.1	186
G1.860.0042.7	172	G2.232.5063.1	21	G2.238.3060.1	26	G2.238.8063.2	28
G1.933.0502.2	152	G2.232.5063.1	183	G2.238.3060.1	185	G2.238.8063.2	186
G1.943.0542.1	158	G2.232.5063.2	21	G2.238.3060.2	26	G2.238.8063.7	186
G1.944.0542.1	158	G2.232.5063.2	183	G2.238.3060.2	185	G2.238.8064.1	30
G1.952.0542.7	167	G2.232.5063.7	183	G2.238.3060.7	185	G2.238.8064.1	187
G1.953.0542.1	167	G2.232.5064.1	23	G2.238.3063.1	28	G2.238.8064.2	187
G1.953.0542.7	167	G2.232.5064.1	184	G2.238.3063.1	186	G2.238.8064.7	187
G1.955.0542.1	167	G2.232.5064.2	23	G2.238.3063.2	28	G3.032.0102.1	18
G1.955.0542.7	167	G2.232.5064.2	184	G2.238.3063.2	186	G3.032.0102.2	18
G1.962.0542.9	171	G2.232.5064.7	184	G2.238.3063.7	186	G3.032.0103.1	25
G1.963.0542.9	171	G2.232.6060.1	19	G2.238.3064.1	30	G3.032.0103.2	25
G1.964.0542.9	171	G2.232.6060.1	182	G2.238.3064.1	187	G3.032.0202.1	18
G1.965.0542.9	171	G2.232.6060.2	19	G2.238.3064.2	30	G3.032.0202.2	18
G1.966.0000.7	172	G2.232.6060.2	182	G2.238.3064.2	187	G3.032.0203.1	25
G1.966.0542.9	172	G2.232.6060.7	182	G2.238.3064.7	187	G3.032.0203.2	25
G2.232.1060.1	19	G2.232.6063.1	21	G2.238.4060.1	26	G3.032.0302.1	18
G2.232.1060.1	182	G2.232.6063.1	183	G2.238.4060.1	185	G3.032.0302.2	18
G2.232.1060.2	19	G2.232.6063.2	21	G2.238.4060.2	26	G3.032.0303.1	25
G2.232.1060.2	182	G2.232.6063.2	183	G2.238.4060.2	185	G3.032.0303.2	25
G2.232.1060.7	182	G2.232.6063.7	183	G2.238.4060.7	185	G3.032.0402.1	18
G2.232.1063.1	21	G2.232.6064.1	23	G2.238.4063.1	28	G3.032.0403.1	25
G2.232.1063.1	183	G2.232.6064.1	184	G2.238.4063.1	186	G3.032.0403.2	25
G2.232.1063.2	21	G2.232.6064.2	23	G2.238.4063.2	28	G3.032.0502.1	18
G2.232.1063.2	183	G2.232.6064.2	184	G2.238.4063.2	186	G3.032.0502.2	18
G2.232.1063.7	183	G2.232.6064.7	184	G2.238.4063.7	186	G3.032.0503.1	25
G2.232.1064.1	23	G2.232.7060.1	19	G2.238.4064.1	30	G3.032.0503.2	25
G2.232.1064.1	184	G2.232.7060.1	182	G2.238.4064.1	187	G3.032.0602.1	18
G2.232.1064.2	23	G2.232.7060.2	19	G2.238.4064.2	187	G3.032.0603.1	25
G2.232.1064.2	184	G2.232.7060.2	182	G2.238.4064.7	187	G3.032.0603.2	25
G2.232.1064.7	184	G2.232.7060.7	182	G2.238.5060.1	26	G3.032.0702.1	18
G2.232.2060.1	19	G2.232.7063.1	183	G2.238.5060.1	185	G3.032.0703.1	25
G2.232.2060.1	182	G2.232.7063.2	183	G2.238.5060.2	26	G3.032.0703.2	25
G2.232.2060.2	19	G2.232.7063.7	183	G2.238.5060.2	185	G3.032.0802.1	18
G2.232.2060.2	182	G2.232.7064.1	23	G2.238.5060.7	185	G3.032.0803.1	25
G2.232.2060.7	182	G2.232.7064.1	184	G2.238.5063.1	28	G3.032.0803.2	25
G2.232.2063.1	21	G2.232.7064.2	23	G2.238.5063.1	186	G3.032.0803.2	25
G2.232.2063.1	183	G2.232.7064.2	184	G2.238.5063.2	28	G3.032.0803.2	25
G2.232.2063.2	21	G2.232.7064.7	184	G2.238.5063.2	186	G3.032.0902.1	18
G2.232.2063.2	183	G2.232.8060.1	19	G2.238.5063.7	186	G3.032.0903.1	25
G2.232.2063.7	183	G2.232.8060.1	182	G2.238.5064.1	30	G3.032.0903.2	25
G2.232.2064.1	23	G2.232.8060.2	19	G2.238.5064.1	187	G3.032.0903.2	25
G2.232.2064.1	184	G2.232.8060.2	182	G2.238.5064.2	187	G3.032.0903.2	25
G2.232.2064.2	23	G2.232.8060.7	182	G2.238.5064.7	187	G3.032.0903.2	25
G2.232.2064.2	184	G2.232.8063.1	183	G2.238.6060.1	26	G3.032.0903.2	25
G2.232.2064.7	184	G2.232.8063.2	183	G2.238.6060.1	185	G3.032.0903.2	25
G2.232.3060.1	19	G2.232.8063.7	183	G2.238.6060.2	26	G3.032.0903.2	25
G2.232.3060.1	182	G2.232.8064.1	23	G2.238.6060.2	185	G3.032.0903.2	25
G2.232.3060.2	19	G2.232.8064.1	184	G2.238.6060.7	185	G3.032.0903.2	25
G2.232.3060.2	182	G2.232.8064.2	23	G2.238.6063.1	28	G3.032.0903.2	25
G2.232.3060.7	182	G2.232.8064.2	184	G2.238.6063.1	186	G3.032.0903.2	25
G2.232.3063.1	21	G2.232.8064.7	184	G2.238.6063.2	28	G3.032.0903.2	25
G2.232.3063.1	183	G2.238.1060.1	26	G2.238.6063.2	186	G3.032.0903.2	25
G2.232.3063.2	21	G2.238.1060.1	185	G2.238.6063.2	186	G3.032.0903.2	25
G2.232.3063.2	183	G2.238.1060.2	26	G2.238.6063.7	186	G3.032.0903.2	25
G2.232.3063.7	183	G2.238.1060.2	185	G2.238.6064.1	30	G3.032.0903.2	25
G2.232.3064.1	23	G2.238.1060.7	185	G2.238.6064.1	187	G3.032.0903.2	25
G2.232.3064.1	184	G2.238.1063.1	28	G2.238.6064.2	30	G3.032.0903.2	25
G2.232.3064.2	23	G2.238.1063.1	186	G2.238.6064.2	187	G3.032.0903.2	25
G2.232.3064.2	184	G2.238.1063.2	186	G2.238.6064.7	187	G3.032.0903.2	25
G2.232.3064.7	184	G2.238.1063.7	186	G2.238.7060.1	26	G3.032.0903.2	25
				G2.238.7060.1	185	G3.032.0903.2	25



Part number | page

G3.432.0203.1	29	G5.051.1503.5	177	G5.351.1503.5	176	G5.451.1503.5	178
G3.432.0302.1	22	G5.051.1503.7	177	G5.351.1503.7	176	G5.451.1503.7	178
G3.432.0302.2	22	G5.061.0203.6	177	G5.361.0203.6	176	G5.461.0203.6	178
G3.432.0303.1	29	G5.061.0203.8	177	G5.361.0203.8	176	G5.461.0203.8	178
G3.432.0303.2	29	G5.061.0303.6	177	G5.361.0303.6	176	G5.461.0303.6	178
G3.432.0402.1	22	G5.061.0303.8	177	G5.361.0303.8	176	G5.461.0303.8	178
G3.432.0403.1	29	G5.061.0503.6	177	G5.361.0503.6	176	G5.461.0503.6	178
G3.432.0403.2	29	G5.061.0503.8	177	G5.361.0503.8	176	G5.461.0503.8	178
G3.432.0502.1	22	G5.061.0703.6	177	G5.361.0703.6	176	G5.461.0703.6	178
G3.432.0503.1	29	G5.061.0703.8	177	G5.361.0703.8	176	G5.461.0703.8	178
G3.432.0503.2	29	G5.061.0903.6	177	G5.361.0903.6	176	G5.461.0903.6	178
G3.432.0602.1	22	G5.061.0903.8	177	G5.361.0903.8	176	G5.461.0903.8	178
G3.432.0603.1	29	G5.061.1103.6	177	G5.361.1103.6	176	G5.461.1103.6	178
G3.432.0603.2	29	G5.061.1103.8	177	G5.361.1103.8	176	G5.461.1103.8	178
G3.432.0703.1	29	G5.061.1303.6	177	G5.361.1303.6	176	G5.461.1303.6	178
G3.432.0703.2	29	G5.061.1303.8	177	G5.361.1303.8	176	G5.461.1303.8	178
G3.432.0802.1	22	G5.061.1503.6	177	G5.361.1503.6	176	G5.461.1503.6	178
G3.432.0803.1	29	G5.061.1503.8	177	G5.361.1503.8	176	G5.461.1503.8	178
G5.031.0203.3	177	G5.331.0203.3	176	G5.431.0203.3	178	G5.536.0103.1	179
G5.031.0204.3	177	G5.331.0204.3	176	G5.431.0204.3	178	G5.536.0103.3	179
G5.031.0206.1	177	G5.331.0206.1	176	G5.431.0206.1	178	G5.536.0203.1	179
G5.031.0303.3	177	G5.331.0303.3	176	G5.431.0303.3	178	G5.536.0203.3	179
G5.031.0304.3	177	G5.331.0304.3	176	G5.431.0304.3	178	G5.800.0023.7	179
G5.031.0306.1	177	G5.331.0306.1	176	G5.431.0306.1	178	G5.800.0044.6	179
G5.031.0503.3	177	G5.331.0503.3	176	G5.431.0503.3	178	G5.800.0063.6	179
G5.031.0504.3	177	G5.331.0504.3	176	G5.431.0504.3	178	G5.931.0593.3	179
G5.031.0506.1	177	G5.331.0506.1	176	G5.431.0506.1	178	G5.931.0593.3	179
G5.031.0703.3	177	G5.331.0703.3	176	G5.431.0703.3	178	G5.931.1093.3	179
G5.031.0704.3	177	G5.331.0704.3	176	G5.431.0704.3	178	G5.931.1093.3	179
G5.031.0706.1	177	G5.331.0706.1	176	G5.431.0706.1	178	G5.931.1593.3	179
G5.031.0903.3	177	G5.331.0903.3	176	G5.431.0903.3	178	G5.931.1593.3	179
G5.031.0904.3	177	G5.331.0904.3	176	G5.431.0904.3	178	G5.931.2093.3	179
G5.031.0906.1	177	G5.331.0906.1	176	G5.431.0906.1	178	G5.931.2093.3	179
G5.031.1103.3	177	G5.331.1103.3	176	G5.431.1103.3	178	G5.931.3093.3	179
G5.031.1104.3	177	G5.331.1104.3	176	G5.431.1104.3	178	G5.931.3093.3	179
G5.031.1106.1	177	G5.331.1106.1	176	G5.431.1106.1	178	G5.931.4093.3	179
G5.031.1303.3	177	G5.331.1303.3	176	G5.431.1303.3	178	G5.931.4093.3	179
G5.031.1304.3	177	G5.331.1304.3	176	G5.431.1304.3	178	G5.931.5093.3	179
G5.031.1306.1	177	G5.331.1306.1	176	G5.431.1306.1	178	G5.931.5093.3	179
G5.031.1503.3	177	G5.331.1503.3	176	G5.431.1503.3	178	G5.936.0543.3	179
G5.031.1504.3	177	G5.331.1504.3	176	G5.431.1504.3	178	G5.936.1043.3	179
G5.031.1506.1	177	G5.331.1506.1	176	G5.431.1506.1	178	G5.936.1543.3	179
G5.041.0203.4	177	G5.341.0203.4	176	G5.441.0203.4	178	G5.946.0542.4	179
G5.041.0204.2	177	G5.341.0204.2	176	G5.441.0204.2	178	G5.946.1042.4	179
G5.041.0204.4	177	G5.341.0204.4	176	G5.441.0204.4	178	G5.946.1542.4	179
G5.041.0303.4	177	G5.341.0303.4	176	G5.441.0303.4	178	G5.956.0542.5	179
G5.041.0304.2	177	G5.341.0304.2	176	G5.441.0304.2	178	G5.956.0542.5	179
G5.041.0304.4	177	G5.341.0304.4	176	G5.441.0304.4	178	G5.956.1042.5	179
G5.041.0503.4	177	G5.341.0503.4	176	G5.441.0503.4	178	G5.956.1042.5	179
G5.041.0504.2	177	G5.341.0504.2	176	G5.441.0504.2	178	G5.956.1542.5	179
G5.041.0504.4	177	G5.341.0504.4	176	G5.441.0504.4	178	G5.956.1542.5	179
G5.041.0703.4	177	G5.341.0703.4	176	G5.441.0703.4	178	G5.966.0542.6	179
G5.041.0704.2	177	G5.341.0704.2	176	G5.441.0704.2	178	G5.966.1042.6	179
G5.041.0704.4	177	G5.341.0704.4	176	G5.441.0704.4	178	G5.966.1542.6	179
G5.041.0903.4	177	G5.341.0903.4	176	G5.441.0903.4	178	Z5.566.5750.0	60
G5.041.0904.2	177	G5.341.0904.2	176	G5.441.0904.2	178	Z6.560.5353.0	136
G5.041.0904.4	177	G5.341.0904.4	176	G5.441.0904.4	178		
G5.041.1103.4	177	G5.341.1103.4	176	G5.441.1103.4	178		
G5.041.1104.2	177	G5.341.1104.2	176	G5.441.1104.2	178		
G5.041.1104.4	177	G5.341.1104.4	176	G5.441.1104.4	178		
G5.041.1303.4	177	G5.341.1303.4	176	G5.441.1303.4	178		
G5.041.1304.2	177	G5.341.1304.2	176	G5.441.1304.2	178		
G5.041.1304.4	177	G5.341.1304.4	176	G5.441.1304.4	178		
G5.041.1503.4	177	G5.341.1503.4	176	G5.441.1503.4	178		
G5.041.1504.2	177	G5.341.1504.2	176	G5.441.1504.2	178		
G5.041.1504.4	177	G5.341.1504.4	176	G5.441.1504.4	178		
G5.051.0203.5	177	G5.351.0203.5	176	G5.451.0203.5	178		
G5.051.0203.7	177	G5.351.0203.7	176	G5.451.0203.7	178		
G5.051.0303.5	177	G5.351.0303.5	176	G5.451.0303.5	178		
G5.051.0303.7	177	G5.351.0303.7	176	G5.451.0303.7	178		
G5.051.0503.5	177	G5.351.0503.5	176	G5.451.0503.5	178		
G5.051.0503.7	177	G5.351.0503.7	176	G5.451.0503.7	178		
G5.051.0703.5	177	G5.351.0703.5	176	G5.451.0703.5	178		
G5.051.0703.7	177	G5.351.0703.7	176	G5.451.0703.7	178		
G5.051.0903.5	177	G5.351.0903.5	176	G5.451.0903.5	178		
G5.051.0903.7	177	G5.351.0903.7	176	G5.451.0903.7	178		
G5.051.1103.5	177	G5.351.1103.5	176	G5.451.1103.5	178		
G5.051.1103.7	177	G5.351.1103.7	176	G5.451.1103.7	178		
G5.051.1303.5	177	G5.351.1303.5	176	G5.451.1303.5	178		
G5.051.1303.7	177	G5.351.1303.7	176	G5.451.1303.7	178		



Technical consultation and general information

Hotline – one call is all it takes

Industrial Automation – Electromechanical

Hotline **+49 951 9324-991**

E-Mail **AT.TS@wieland-electric.com**

Building and Installation Technology

Hotline **+49 951 9324-996**

E-Mail **BIT.TS@wieland-electric.com**

Industrial Automation – Electronics

Hotline **+49 951 9324-995**

E-Mail **AT.TS@wieland-electric.com**

Safety Technology

Hotline **+49 951 9324-999**

E-Mail **safety@wieland-electric.com**



General information and news:
www.wieland-electric.com

Visit our e-catalog at
<http://eshop.wieland-electric.com>



Our subsidiaries

... and the addresses of our sales partner worldwide are available at:

www.wieland-electric.com



USA
Wieland Electric Inc.
North American Headquarters
2889 Brighton Road
Oakville, Ontario L6H 6C9
Phone +1 905 8298414
Fax +1 905 8298413
www.wielandinc.com



CANADA
Wieland Electric Inc.
North American Headquarters
2889 Brighton Road
Oakville, Ontario L6H 6C9
Phone +1 905 8298414
Fax +1 905 8298413
www.wieland-electric.ca



GREAT BRITAIN
Wieland Electric Ltd.
Riverside Business Center,
Walnut Tree Close
GB-Guildford/Surrey GU1 4UG
Phone +44 1483 531213
Fax +44 1483 505029
sales.uk@wieland-electric.com
www.wieland.co.uk



FRANCE
Wieland Electric SARL.
Le Cérame, Hall 6
47, avenue des Genottes
CS 48313
95803 Cergy-Pontoise Cedex
Phone +33 1 30320707
Fax +33 1 30320714
info.france@wieland-electric.com
www.wieland-electric.fr



SPAIN
Wieland Electric S.L.
C/ Maria Auxiliadora 2, bajos
E-08017 Barcelona
Phone +34 93 2523820
Fax +34 93 2523825
ventas@wieland-electric.com
www.wieland-electric.es



ITALY
Wieland Electric S.r.l.
Via Edison, 209
I-20019 Settimo Milanese
Phone +39 02 48916357
Fax +39 02 48920685
info.italy@wieland-electric.com
www.wieland-electric.it



BELGIUM & GH LUXEMBOURG
ATEM-Wieland Electric NV
Bedrijvenpark De Veert 4
B-2830 Willebroek
Phone +32 3 8661800
Fax +32 3 8661828
info.belgium@wieland-electric.com
www.wieland-electric.be



DENMARK
Wieland Electric A/S
Vallørækken 26
DK-4600 Køge
Phone +45 70 266635
Fax +45 70 266637
sales.denmark@wieland-electric.com
www.wieland-electric.dk



SWITZERLAND
Wieland Electric AG
Harzachstrasse 2b
CH-8404 Winterthur
Phone +41 52 2352100
Fax +41 52 2352119
info.swiss@wieland-electric.com
www.wieland-electric.ch



POLAND
Wieland Electric Sp. Zo.o.
Św. Antoniego 8
62-080 Swadzim
Phone +48 61 2225400
Fax +48 61 8407166
office@wieland-electric.pl
www.wieland-electric.pl



CHINA
Wieland Electric Trading
Unit 2703 International Soho City
889 Renmin Road,
Huang Pu District
PRC- Shanghai 200010
Phone +86 21 63555833
Fax +86 21 63550090
info-shanghai@wieland-electric.com
www.wieland-electric.cn




JAPAN
Wieland Electric Co, Ltd.
Nisso No. 16 Bldg. 7F
3-8-8 Shin-Yokohama,
Kohoku-ku
Yokohama 222-0033
Phone +81 45 473 5085
Fax +81 45 470 5408
info.japan@wieland-electric.com



GERMANY
Headquarters
Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg, Germany
Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com
www.wieland-electric.de

Subject to technical modifications! **gesis**®, **RST**®, **GST**®, **GST18**®, **podis**®, **samos**® and **saris**® are registered trademarks of Wieland Electric GmbH

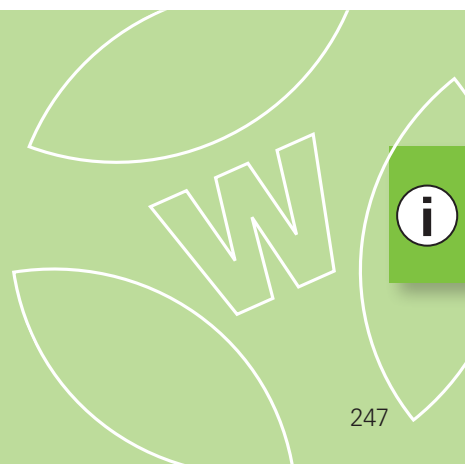

Headquarters:
Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg, Germany

Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com
www.wieland-electric.com

Industrial technology

Solutions for the control cabinet

- DIN rail terminal blocks
 - Screw, tension spring or push-in connection technology
 - Wire cross sections up to 300 mm²
 - Numerous special functions
 - Software solutions interfacing to CAE systems
- Safety
 - Safe signal acquisition
 - Safety switching devices
 - Modular safety modules
 - Compact safety controllers
 - Application consulting and training
- Network engineering and fieldbus systems
 - Remote maintenance via VPN industrial router and VPN service portal
 - Industrial Ethernet switches
 - PLC and I/O systems, standard and increased environmental conditions
- Interface
 - Power supply units
 - Overvoltage protection
 - Coupling relays, semiconductor switches
 - Timer relays, measuring and monitoring relays
 - Analog coupling and converter modules
 - Passive interfaces

Solutions for field applications

- Decentralized installation and automation technology
 - Electrical installation for wind tower
 - Fieldbus interfaces and motor starters
- Connectors for industrial applications
 - Rectangular and round connectors
 - Aluminium or plastic housings
 - Degree of protection up to IP 69
 - Current-carrying capacity up to 100 A
 - Connectors for hazardous areas
 - Modular, application-specific technology

PC board terminals and connectors

- Screw or spring clamp connection technology
- Spacings: 2.5 mm to 10.16 mm
- Reflow or wave soldering process

Building and installation technology

- Building installation systems
 - Main power supply connectors IP 20/IP 65 ... IP 69
 - Bus connectors
 - Low-voltage connectors
 - Power distribution system with flat cables
 - Distribution systems
 - Room automation with KNX, EnOcean, SMI and DALI
 - DIN rail terminal blocks for electrical installations
 - Overvoltage protection