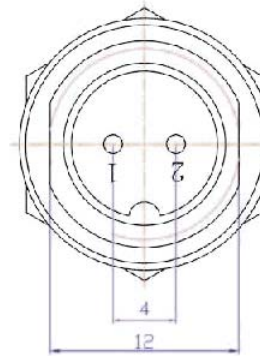
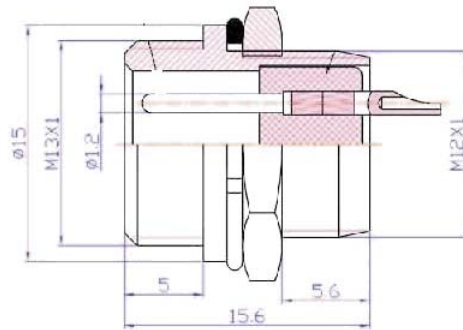
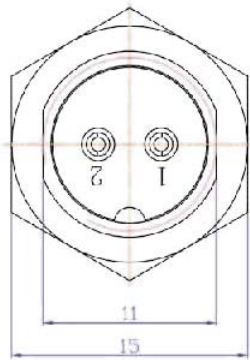


25-732M-0**Pin Layout**




2P	3P	4P	5P

25-722M-0
25-732M-0

25-723M-0
25-733M-0

25-724M-0
25-734M-0

25-725M-0
25-735M-0

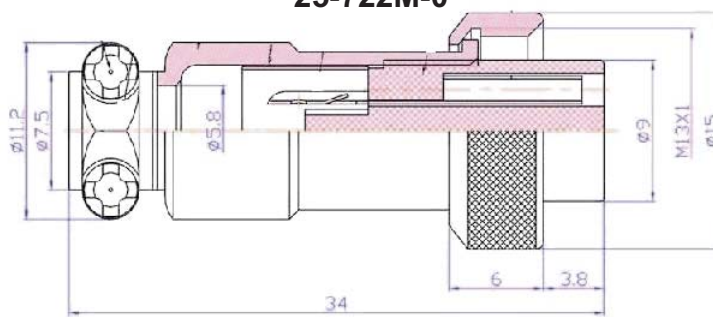25-722M-0**SPECIFICATIONS:**

Safety approval: UL
Water proof: IP≥55

Electrical

Rated current: 5A
Rated Voltage: 125V
Operation Voltage: 200VAC
Withstanding Voltage: 1500VAC
Insulation resistance: 1500MΩ DC 500V
Contact resistance: 10 mΩ DC1A
Solder cup mouth dia.: 0.9 mm
Solder diameter: 1.15mm

Inline Plugs

Part #	Number of Pins
25-722M-0	2
25-723M-0	3
25-724M-0	4
25-725M-0	5

Chassis Jacks

Part #	Number of Pins
25-732M-0	2
25-733M-0	3
25-734M-0	4
25-735M-0	5

TITLE **MINIATURE CONNECTORS**

SCALE

NTS

DRAWING NO. **25-7XXM**

UNITS **mm**

FILE NAME **25-7XXM.pdf**

SHEET **1/1**