


Waterproof Cable Clamp (with Rubber Bushing)

4. CE3057-10A-1-D(R1)

① ② ③

① Clamp Size	4A, 10A, 12A, 16A, 20A, 24A
② Bushing Size	Refer to the Applicable Cable
③ Finish(RoHS)	Trivalent Chromium Finish (Black)

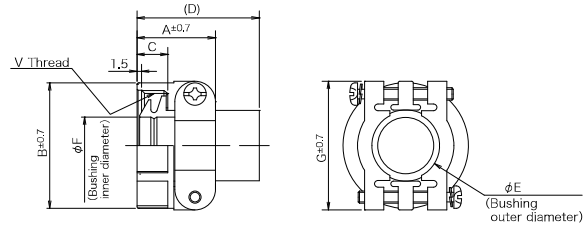

Shell Size	Part Number	Full Length A	Outer diameter B	Effective screw length C	(D)	E	F	G	Mounting screws V	Bushing P/N	Applicable Cable (Note 1)
12S	CE3057-4A-1-D(R1)	20.62	20.6	10.31	(41.3)	8.0	5.6	22.2	5/8-24UNEF-2B	CE3420-4-1(R1)	φ 3.6 ~ φ 5.6
14S	CE3057-6A-1-D(R1)	22.20	24.6	10.31	(41.3)	10.8	9.0	27.0	3/4-20UNEF-2B	CE3420-6-1(R1)	φ 7 ~ φ 9
16S,16	CE3057-8A-1-D(R1)	23.83	27.8	10.31	(41.3)	14.0	12.0	29.4	7/8-20UNEF-2B	CE3420-8-1(R1)	φ 10 ~ φ 12
	CE3057-8A-2-D(R1)						10.5			CE3420-8-2(R1)	φ 8.5 ~ φ 10.5
18	CE3057-10A-1-D(R1)	23.83	30.1	10.31	(41.3)	15.8	14.1	31.7	1-20UNEF-2B	CE3420-10-1(R1)	φ 10.5 ~ φ 14.1
	CE3057-10A-2-D(R1)						11.0			CE3420-10-2(R1)	φ 8.5 ~ φ 11
	CE3057-10A-3-D(R1)						8.7			CE3420-10-3(R1)	φ 6.5 ~ φ 8.7
20 22	CE3057-12A-1-D(R1)	23.83	35.0	10.31	(41.3)	19.0	16.0	37.3	1 3/16-18UNEF-2B	CE3420-12-1(R1)	φ 12.5 ~ φ 16
	CE3057-12A-2-D(R1)						13.0			CE3420-12-2(R1)	φ 9.5 ~ φ 13
	CE3057-12A-3-D(R1)						10.0			CE3420-12-3(R1)	φ 6.8 ~ φ 10
	CE3057-12A-7-D(R1)						17.0			CE3420-12-7(R1)	φ 14.5 ~ φ 17
24 28	CE3057-16A-1-D(R1)	26.19	42.1	10.31	(41.3)	23.8	19.1	42.9	1 7/16-18UNEF-2B	CE3420-16-1(R1)	φ 15 ~ φ 19.1
	CE3057-16A-2-D(R1)						15.5			CE3420-16-2(R1)	φ 13 ~ φ 15.5
	CE3057-16A-4-D(R1)						21.5			CZY005-GB-3(R1)	φ 19.1 ~ φ 21.5
	CE3057-16A-6-D(R1)						20.0			CE3420-16-6(R1)	φ 18.5 ~ φ 20
	CE3057-16A-7-D(R1)						13.5			CE3420-16-7(R1)	φ 11.5 ~ φ 13.5
	CE3057-16A-8-D(R1)						12.5			CZY005-GB-6(R1)	φ 10.5 ~ φ 12.5
32	CE3057-20A-1-D(R1)	27.79	51.6	11.91	(43.0)	32.8	23.8	51.6	1 3/4-18UNS-2B	CE3420-20-1(R1)	φ 22 ~ φ 23.8
	CE3057-20A-2-D(R1)						26.6			CE3420-20-2(R1)	φ 24 ~ φ 26.6
	CE3057-20A-3-D(R1)						22.5			CZY005-GB-5(R1)	φ 21 ~ φ 22.5
36	CE3057-24A-1-D(R1)	29.40	56.4	13.50	(45.8)	34.6	32.5	58.0	2-18UNS-2B	CE3420-24-1(R1)	φ 30 ~ φ 32.5
	CE3057-24A-2-D(R1)						29.6			CE3420-24-2(R1)	φ 27.5 ~ φ 29.6

Note1: Please make sure to use the cable which is within the specification of the applicable cable listed above.

Please use the cable clamp together with the waterproof backshell.

Note2: Depending on the cable used, the contact between bushing and cable may be discolored.

※ Shell size: Nominal dia. of coupling part screw (Inch×16)

e.g. 1 1/8-18UNEF-2A

1 1/8×16=18

※ UNEF, UNS, UN: Unified screw

2B: female screw of 2nd grade